

FEATURES

- ▶ Fully Encapsulated Plastic Case for PCB Mounting
- ▶ Universal Input 85~264VAC, 47~440Hz
- ▶ Protection Class II as per IEC/EN 60536
- ▶ I/O Isolation 3000VAC with Reinforced Insulation
- ▶ Operating Ambient Temp. Range -25°C to +70°C
- ▶ Overload/Voltage and Short Circuit Protection
- ▶ Designed-in EMI Emission meets EN 55011/32 Class B & FCC Level B
- ▶ Designed-in EMC Immunity meets EN61000-4-2,3,4,5,6,8,11
- ▶ Eco Design, Compliant to Energy Star Specification and ErP Directive 2009/125/EC
- ▶ UL/cUL/IEC/EN 60950-1 Safety Approval & CE Marking


PRODUCT OVERVIEW

The MINMAX AHF-10 series is a range of fully encapsulated AC/DC power supply modules. The product features EMI-filter to EN 55011/32, class B and EMS compliance to EN 61000-4 standard. Universal input voltage 85-264VAC and International safety approvals qualifies these power modules for applications in products with worldwide markets. The AHF-10 series provide a cost effective solution for many space critical applications in commercial and industrial electronic equipment.

Model Selection Guide

Model Number	Output Voltage VDC	Output Current	Input Current 115VAC, 60Hz @Max. Load mA(typ.)	Max. capacitive Load μF	Efficiency (typ.)
		Max. mA			@Max. Load %
AHF-10S03	3.3	2000	137	3900	70
AHF-10S05	5	2000	199	3300	73
AHF-10S12	12	833	191	2200	76
AHF-10S15	15	666	191	2200	76
AHF-10S24	24	416	190	1000	76
AHF-10D12	±12	±380	172	#1000	77
AHF-10D15	±15	±300	169	#1000	77

For each output

Input Specifications

Parameter	Conditions / Model	Min.	Typ.	Max.	Unit
Input Voltage Range	All Models	85	---	264	VAC
Input Frequency Range		47	---	440	Hz
Input Voltage Range		120	---	370	VDC
No-Load Power Consumption		---	---	0.3	W
Inrush Current	115VAC	---	---	10	A
	230VAC	---	---	20	A

Output Specifications

Parameter	Conditions / Model	Min.	Typ.	Max.	Unit	
Output Voltage Setting Accuracy		---	±1.0	±2.0	%Vnom.	
Line Regulation	Vin=Min. to Max. @Full Load	---	±0.5	±1.0	%	
Load Regulation	Iout=Min. to Max.	Single Output Models	---	±0.5	±1.0	%
		Dual Output Models	---	±2.5	±5.0	%
Ripple & Noise	0-20 MHz Bandwidth	3.3 & 5.0VDC Output Models	---	1.5	1.8	%V _{PP} of V _o
		Other Output Models	---	0.8	1.0	%V _{PP} of V _o
Minimum Load		---	10	---	%I _{nom} .	
Over Voltage Protection	Zener diode clamp	---	120	---	% of V _o	
Temperature Coefficient		---	±0.01	±0.02	%/°C	
Overshoot		---	---	5	% V _{out}	
Over Load Protection	Foldback, auto-recovery (long term overload condition may cause damage)	105	---	---	%I _{nom} .	
Short Circuit Protection	Hiccup mode, Automatic Recovery					


General Specifications					
Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	Input to Output, 60 Seconds	3000	---	---	VACrms
I/O Isolation Resistance	500 VDC	100	---	---	MΩ
Switching Frequency		---	100	---	KHz
Hold-up Time		---	20	---	ms
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign	300,000			Hours
Protection Class II	According IEC/EN 60536				
Safety Approvals	UL/cUL 60950-1 recognition (UL certificate), IEC/EN 60950-1 (CB-report)				

EMC Specifications			
Parameter	Standards & Level		Performance
EMI	Conduction and Radiation	EN 55011, EN 55032, FCC part 15	Class B
	EN 55011, EN 55024		
EMS	ESD	EN 61000-4-2 air ± 8kV, Contact ± 4kV	B
	Radiated immunity	EN 61000-4-3 10V/m	A
	Fast transient	EN 61000-4-4 ±2kV	B
	Surge	EN 61000-4-5 ±1kV	B
	Conducted immunity	EN 61000-4-6 10Vrms	B
	PFMF	EN 61000-4-8 30A/m	A
	Dips	EN 61000-4-11 30% 10ms	B
	Interruptions	EN 61000-4-11 >95% 5000ms	C

Environmental Specifications					
Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating Ambient Temperature Range	Natural Convection	-25	---	+70	°C
Storage Temperature Range		-40	---	+85	°C
Power Derating	+50°C to +70°C	0.375			W / °C
Thermal Shutdown	Shutdown, Internal IC Junction Temperature	---	142	---	°C
	Automatic Recovery, Internal IC Junction Temperature	---	67	---	°C
Humidity (non condensing)		---		95	% rel. H
Cooling	Natural Convection				
Lead Temperature (1.5mm from case for 10Sec.)		---		260	°C

Notes	
1	All specifications typical at Ta=+25°C, resistive load, 115VAC, 60Hz input voltage and after warm-up time rated output current unless otherwise noted.
2	These power modules require a minimum output loading to maintain specified regulation, operation under no-load conditions will not damage the power supplies however they may not meet all listed specifications.
3	We recommend to protect the converter by a slow blow fuse in the input supply line.
4	Other input and output voltage may be available, please contact factory.
5	Specifications are subject to change without notice

Package Specifications

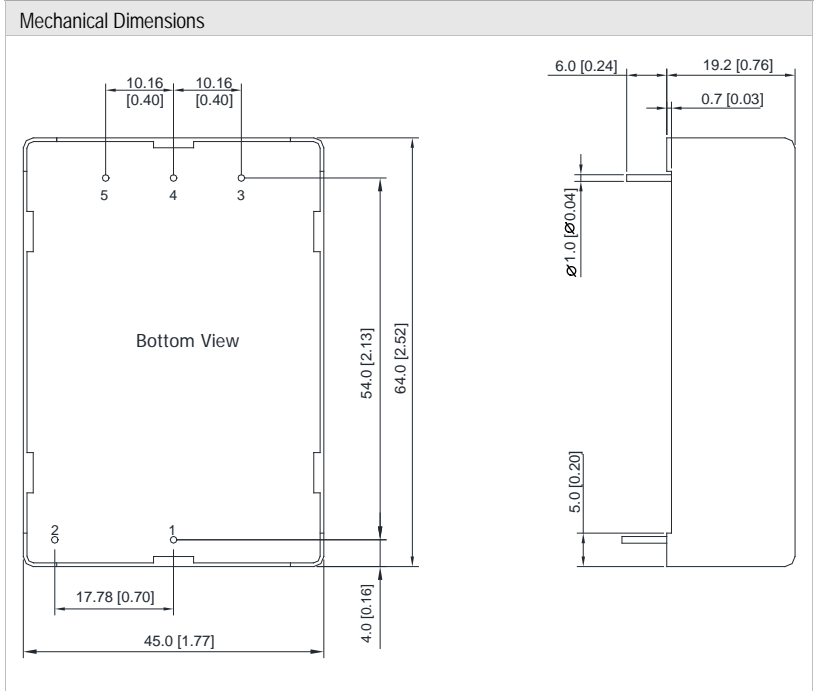

Pin Connections

Pin	Single Output	Dual Output
1	AC(N) – AC Neutral	
2	AC(L) – AC Line	
3	-Vout	
4	NC	Common
5	+Vout	

NC: No Connection

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: ± 0.5 (± 0.02)
- ▶ Pin diameter $\varnothing 1.0 \pm 0.1$ (0.04 ± 0.004)

Physical Characteristics

Case Size	: 64.0x45.0x19.2mm (2.52x1.77x0.76 Inches)
Case Material	: Plastic resin (flammability to UL 94V-0 rated)
Pin Material	: Copper Alloy with Gold Plate Over Nickel Subplate
Weight	: 92g