



MINMAX[®]

AAF-03 Series


Electric Characteristic Note

AAF-03 Series EC Note

AC-DC Power Module 3W

Features

- ▶ Ultra Compact Size 1.0" x 1.0" x 0.64"
- ▶ Fully Encapsulated Plastic Case for PCB Mounting
- ▶ Universal Input 85-264VAC
- ▶ I/O Isolation 3000VAC with Reinforced Insulation
- ▶ Operating Ambient Temp. Range -25°C to +70°C
- ▶ No Min. Load Requirement
- ▶ Overload/Voltage and Short Circuit Protection
- ▶ EMI Emission EN 55032/14-1 Class B Approved
- ▶ EMS Immunity EN 61000-4-2,3,4,5,6,8,11 Approved
- ▶ Eco Design, Low No Load Power Consumption < 150mW
- ▶ UL/cUL/IEC/EN 62368-1(60950-1), TUV/IEC/EN 60335-1 Safety Approval & CE Marking

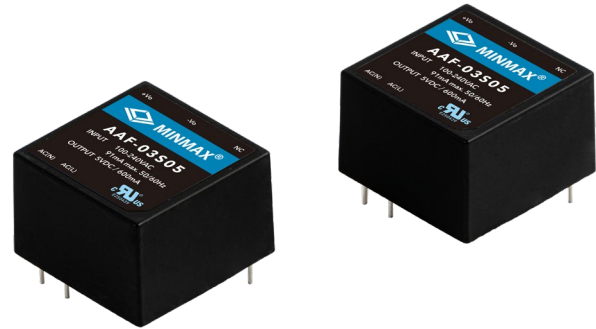

Applications

- ▶ Distributed power architectures
- ▶ Workstations
- ▶ Computer equipment
- ▶ Communications equipment

Product Overview

The AAF-03 Series from MINMAX is a range of ultra-small, fully encapsulated 3 Watt AC-DC power supply modules. They are designed for easy PCB mounting with solder pins. The modules feature EMI emission EN 55032/14-1 Class B approved. EMC immunity complies with EN 61000-6-1. The low stand-by power consumption complies with European ErP Directive 2009/125/EC. This series comply with international standard pinout and input voltage range of 85-264VAC for worldwide markets. The AAF-03 series provide a better solution for space critical applications in consumer appliances and instrumentation and communication equipment.

Table of contents

Model Selection Guide	P2	Package Specifications	P10
Input Specifications.....	P2	Recommended Pad Layout.....	P10
Output Specifications.....	P2	Packaging Information.....	P11
General Specifications.....	P2	Wave Soldering Considerations.....	P12
EMC Specifications.....	P3	Hand Welding Parameter	P12
Environmental Specifications	P3	Part Number Structure	P13
Characteristic Curves	P4	MTBF and Reliability	P13

Model Selection Guide

Model Number	Output Voltage	Output Current		Input Current	Max. capacitive Load	Efficiency (typ.)
		Max.	Peak ₍₁₎	@Max. Load		@Max. Load
	VDC	mA	mA	mA(typ.)	μF	%
AAF-03S03	3.3	900	1170	62	1200	70
AAF-03S05	5	600	780	61	820	72
AAF-03S09	9	333	430	57	470	77
AAF-03S12	12	250	320	56	330	78
AAF-03S15	15	200	260	56	270	78
AAF-03S24	24	125	160	56	180	78

Input Specifications

Parameter	Conditions / Model	Min.	Typ.	Max.	Unit
Input Voltage Range	All Models	85	---	264	VAC
Input Frequency Range		47	---	63	Hz
Input Voltage Range		120	---	370	VDC
No-Load Power Consumption		---	---	150	mW
Inrush Current (Cold Start at 25°C)	115VAC	---	---	15	A
	230VAC	---	---	25	A

Output Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy		---	---	±2.0	%Vnom.
Line Regulation	Vin=Min. to Max. @Full Load	---	---	±1.0	%
Load Regulation	Io=0% to 100%	---	---	±1.0	%
Ripple & Noise	0-20 MHz Bandwidth	---	---	70	mV _{P-P}
Minimum Load	No minimum Load Requirement				
Over Voltage Protection	Zener Diode Clamp	---	125	---	% of Vo
Temperature Coefficient		---	---	±0.05	%/°C
Overshoot		---	---	5	%Vout
Over Load Protection	Hiccup mode, auto-recovery	135	150	---	%Inom.
	(long term overload condition may cause damage)				
Short Circuit Protection	Hiccup mode, Automatic Recovery				

General Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	60 Seconds	3000	---	---	VAC
I/O Isolation Resistance	500 VDC	100	---	---	MΩ
Switching Frequency		---	65	---	kHz
Hold-up Time	115VAC, Full Load	---	8	---	ms
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign	1,200,000			Hours
Safety Approvals	UL/cUL 60950-1 recognition (UL certificate), IEC/EN 60950-1 (CB-report)				
	UL/cUL 62368-1 recognition (UL certificate), IEC/EN 62368-1 (CB-report)				
	IEC/EN 60335-1 recognition (CB-report, TUV certificate)				


EMC Specifications				
Parameter	Standards & Level			Performance
EMI	Conduction	EN 55014-1, EN 55032	Without external components	Class B
	Radiation			
EMS	EN 55014-2, EN 55035			
	ESD	EN 61000-4-2 Air \pm 8kV, Contact \pm 4kV		A
	Radiated immunity	EN 61000-4-3 10V/m		A
	Fast transient	EN 61000-4-4 \pm 2kV		A
	Surge	EN 61000-4-5 \pm 1kV		A
	Conducted immunity	EN 61000-4-6 10Vrms		A
	PFMF	EN 61000-4-8 30A/m		A
	Dips	EN 61000-4-11 30% 10ms		A
	Interruptions	EN 61000-4-11 >95% 5000ms		B

Environmental Specifications				
Parameter	Conditions	Min.	Max.	Unit
Operating Ambient Temperature Range		-25	+70	°C
Storage Temperature Range		-40	+85	°C
Power Derating	+60°C to +70°C	0.15		W / °C
Humidity (non condensing)		---	95	% rel. H
Lead Temperature (1.5mm from case for 10Sec.)		---	260	°C


Notes
1 Peak load lasting <30s with a maximum duty cycle of 10%, average output power not to exceed maximum power.
2 All specifications typical at Ta=+25°C, resistive load, 115VAC, 60Hz input voltage and after warm-up time rated output current unless otherwise noted.
3 We recommend to protect the converter by a slow blow fuse in the input supply line.
4 Other input and output voltage may be available, please contact MINMAX.
5 Specifications are subject to change without notice.

Characteristic Curves


All test conditions are at 25°C The figures are identical for AAF-03S03

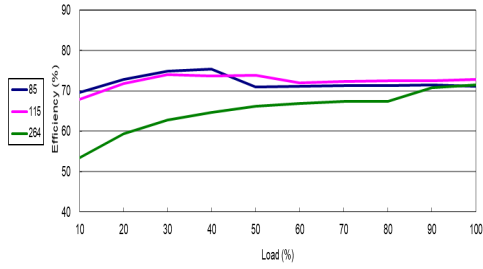


Efficiency Versus Output Current

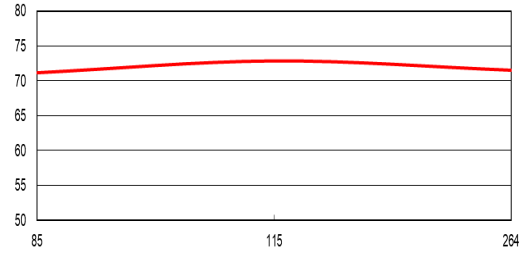


Efficiency Versus Input Voltage Full Load

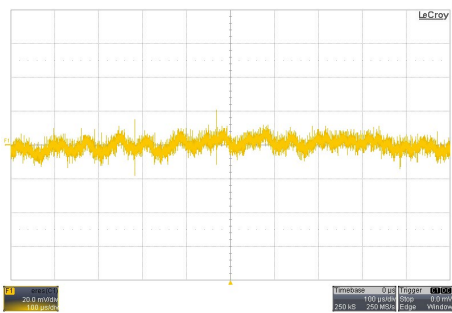

Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

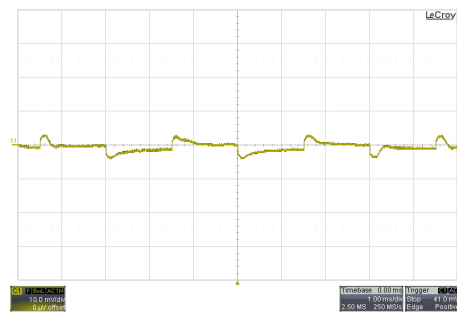


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load ; $V_{in}=V_{in\ nom}$

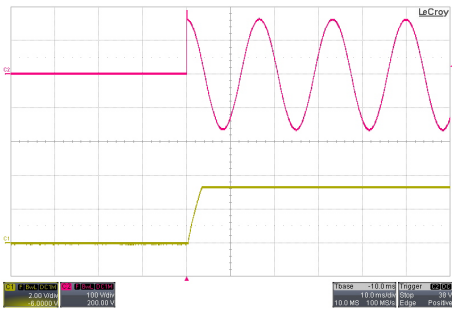


Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

Characteristic Curves


All test conditions are at 25°C The figures are identical for AAF-03S05

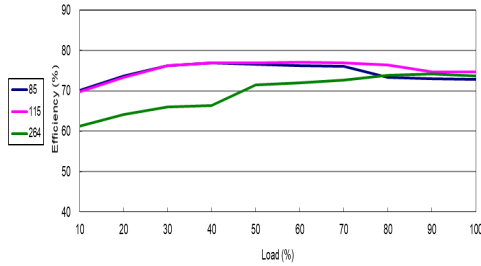


Efficiency Versus Output Current

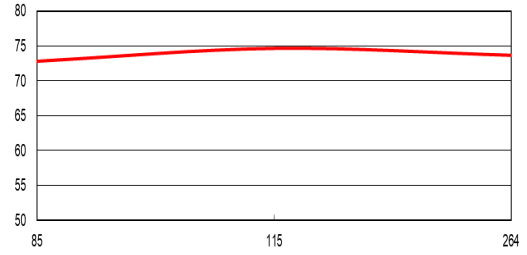


Efficiency Versus Input Voltage Full Load

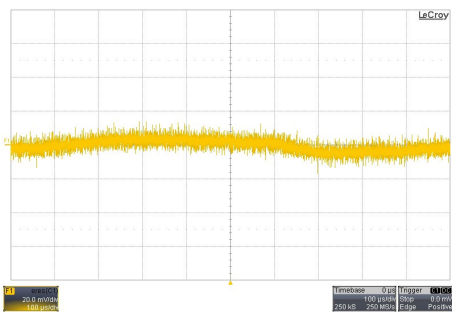

Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

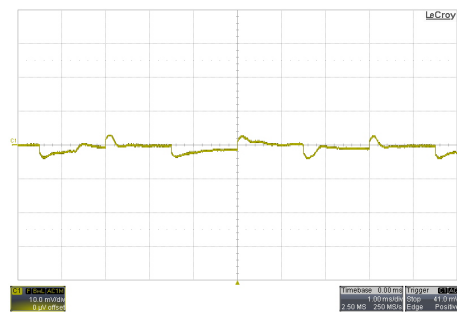


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load ; $V_{in}=V_{in\ nom}$

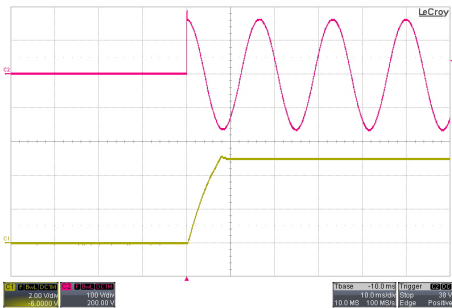


Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

Characteristic Curves


All test conditions are at 25°C The figures are identical for AAF-03S09

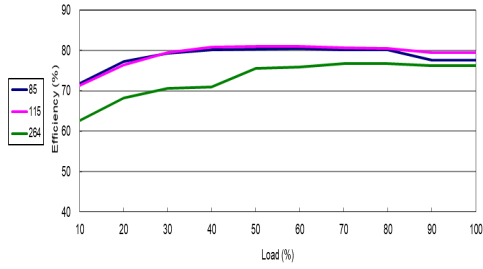


Efficiency Versus Output Current

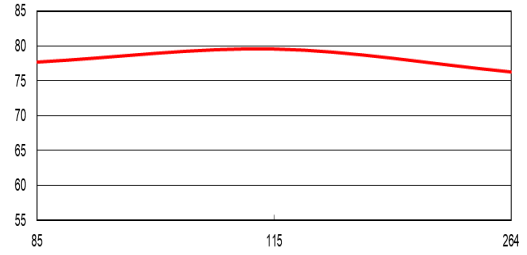


Efficiency Versus Input Voltage Full Load

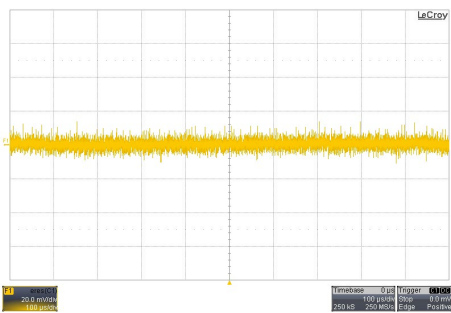

Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

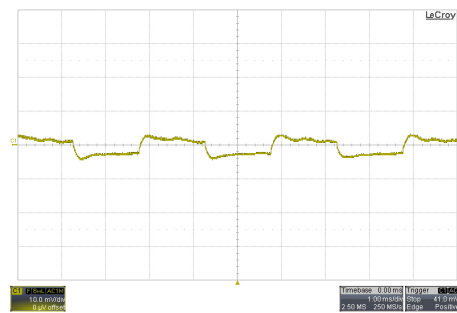


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load ; $V_{in}=V_{in\ nom}$

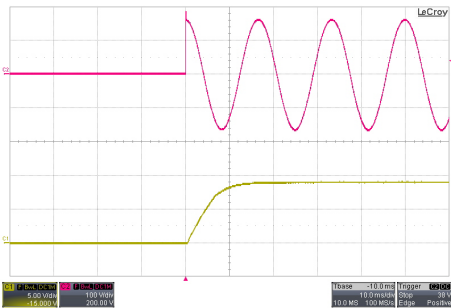


Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

Characteristic Curves


All test conditions are at 25°C The figures are identical for AAF-03S12

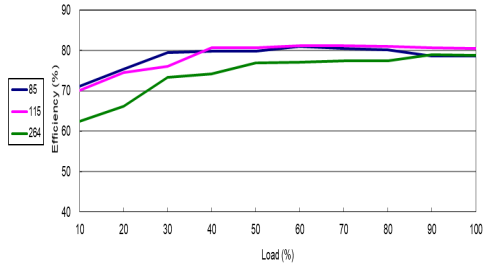


Efficiency Versus Output Current

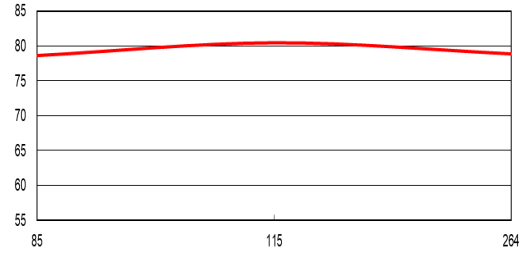


Efficiency Versus Input Voltage Full Load

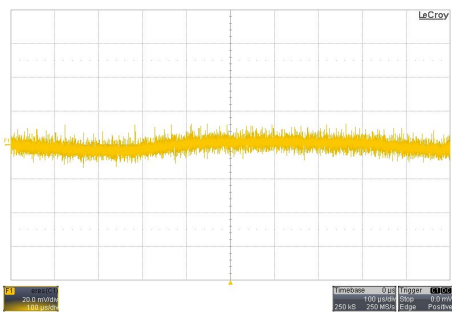

Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

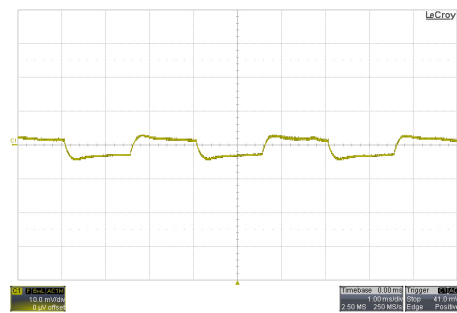


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load; $V_{in}=V_{in\ nom}$

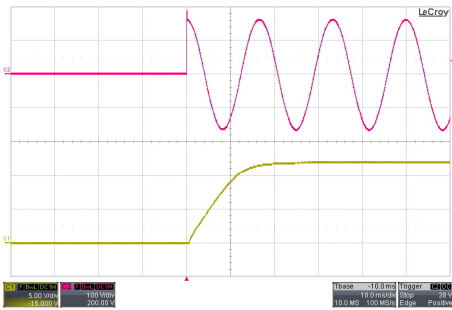


Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

Characteristic Curves


All test conditions are at 25°C The figures are identical for AAF-03S15

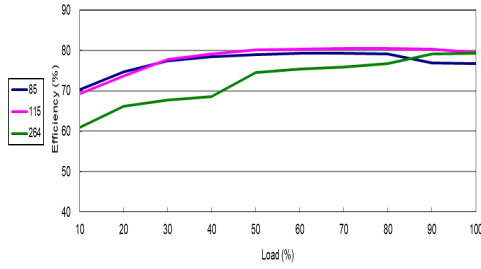


Efficiency Versus Output Current

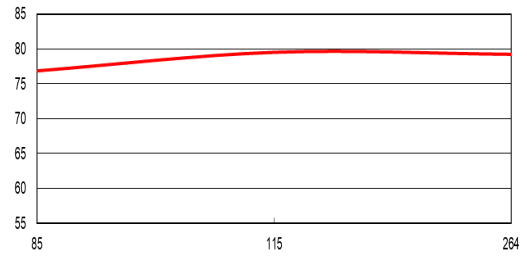


Efficiency Versus Input Voltage Full Load

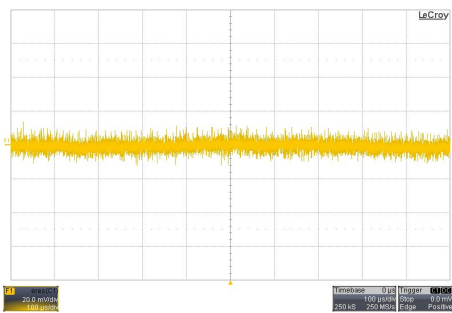

Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

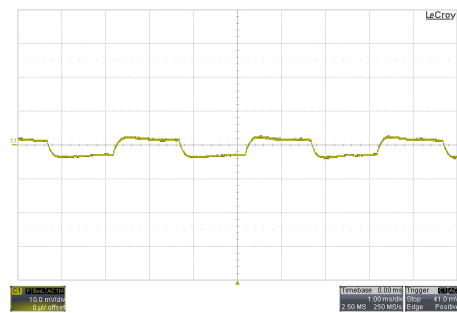


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load ; $V_{in}=V_{in\ nom}$

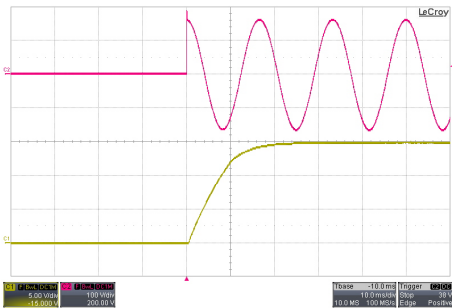


Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

Characteristic Curves


All test conditions are at 25°C The figures are identical for AAF-03S24

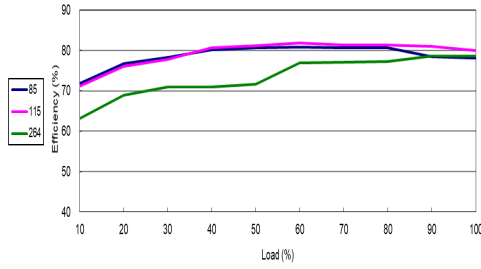


Efficiency Versus Output Current

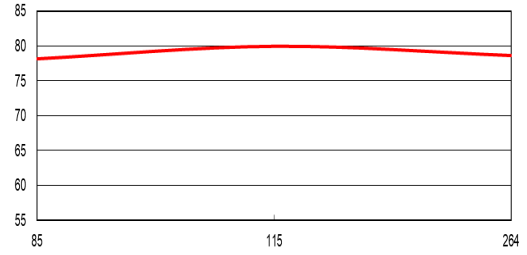


Efficiency Versus Input Voltage Full Load

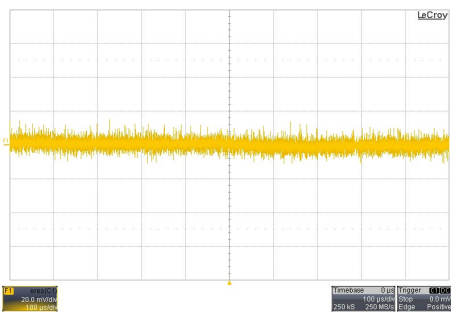

Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

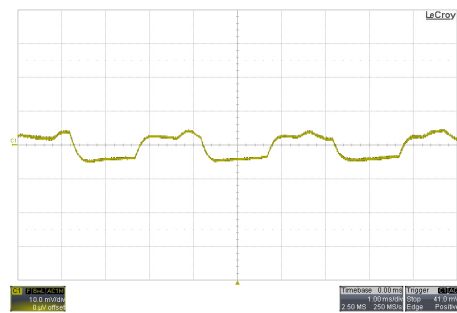


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load ; $V_{in}=V_{in\ nom}$

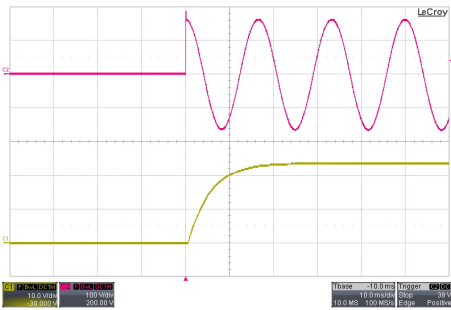

Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

Package Specifications

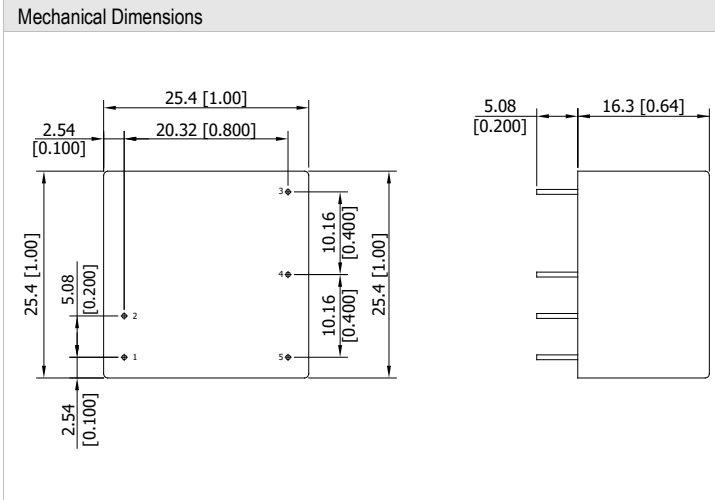

Pin Connections

Pin	Function	Diameter mm (inches)
1	AC (N)	∅ 0.6 [0.02]
2	AC (L)	∅ 0.6 [0.02]
3	NC	∅ 0.6 [0.02]
4	-Vout	∅ 0.6 [0.02]
5	+Vout	∅ 0.6 [0.02]


NC: No Connection

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: ±0.5 (±0.02)
- ▶ Pin pitch tolerance: ±0.25 (±0.01)
- ▶ Pin diameter tolerance: X.X±0.1 (X.XX±0.004)

Physical Characteristics


Case Size	: 25.4x25.4x16.3mm (1.0x1.0x0.64 inches)
Case Material	: Plastic resin (flammability to UL 94V-0 rated)
Pin Material	: Copper Alloy
Weight	: 17.4g

Recommended Pad Layout


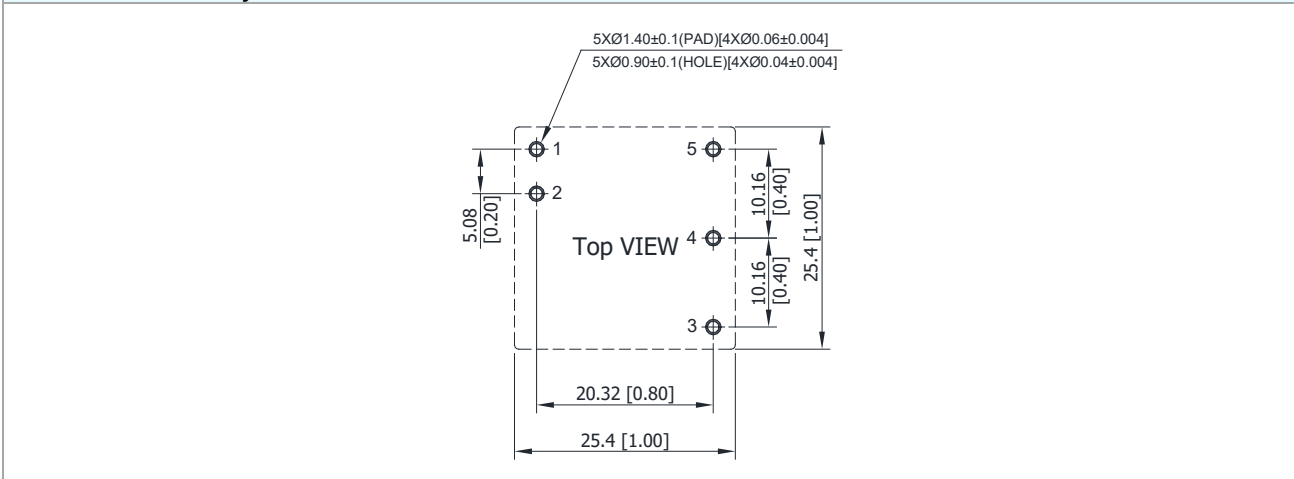


Packaging Information




Tube



Nail

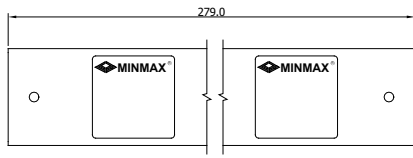


Unit: mm
10 PCS per TUBE

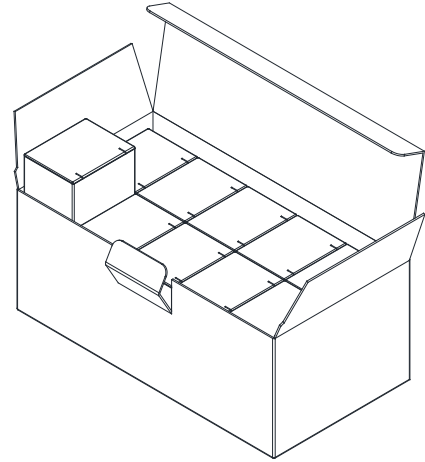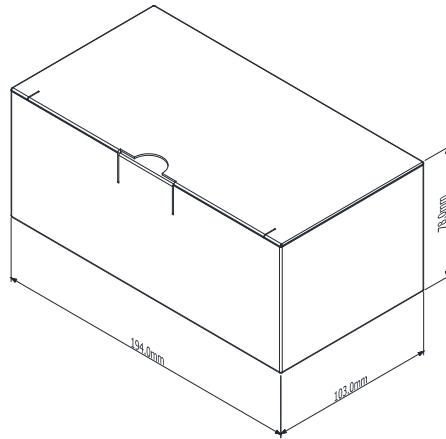

Unit: mm
10 PCS per Box

Wave Soldering Considerations

Lead free wave solder profile

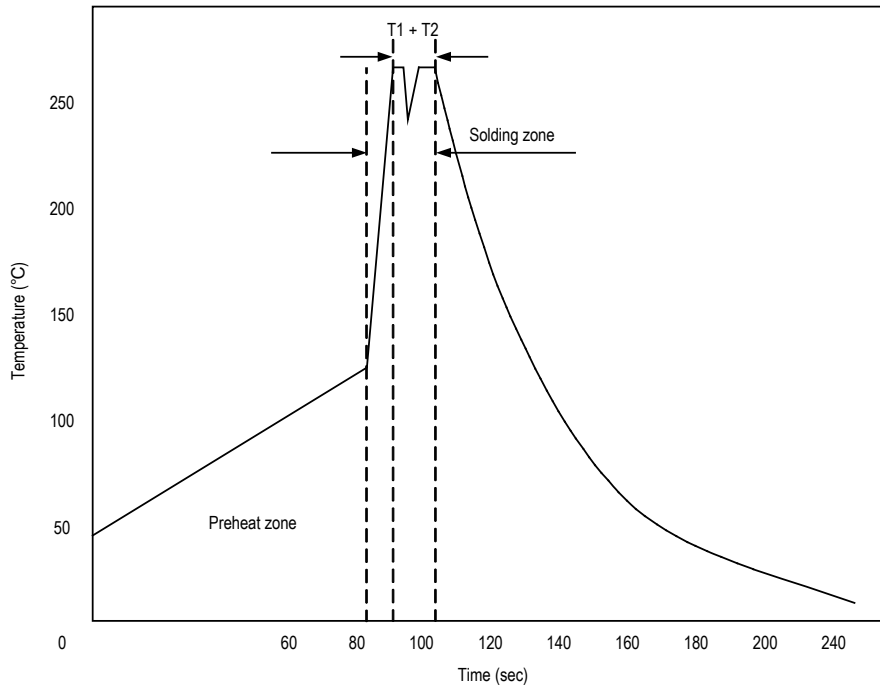

Zone	Reference Parameter
Preheat	Rise temp. speed : 3°C/sec max.
zone	Preheat temp. : 100~130°C
Actual	Peak temp. : 250~260°C
heating	Peak time(T1+T2) : 4~6 sec

Hand Welding Parameter

Reference Solder: Sn-Ag-Cu : Sn-Cu : Sn-Ag

Hand Welding: Soldering iron : Power 60W

Welding Time: 2~4 sec

Temp.: 380~400°C

Part Number Structure

AAF	-	03	S	03																									
		<table border="1"> <tr> <td style="text-align: center;">Output Power</td> </tr> <tr> <td style="text-align: center;">3 Watt</td> </tr> </table>	Output Power	3 Watt	<table border="1"> <tr> <td style="text-align: center;">Output Quantity</td> </tr> <tr> <td style="text-align: center;">S: Single</td> </tr> </table>	Output Quantity	S: Single	<table border="1"> <tr> <td colspan="3" style="text-align: center;">Output Voltage</td> </tr> <tr> <td style="text-align: center;">03:</td> <td style="text-align: center;">3.3</td> <td style="text-align: center;">VDC</td> </tr> <tr> <td style="text-align: center;">05:</td> <td style="text-align: center;">5</td> <td style="text-align: center;">VDC</td> </tr> <tr> <td style="text-align: center;">09:</td> <td style="text-align: center;">9</td> <td style="text-align: center;">VDC</td> </tr> <tr> <td style="text-align: center;">12:</td> <td style="text-align: center;">12</td> <td style="text-align: center;">VDC</td> </tr> <tr> <td style="text-align: center;">15:</td> <td style="text-align: center;">15</td> <td style="text-align: center;">VDC</td> </tr> <tr> <td style="text-align: center;">24:</td> <td style="text-align: center;">24</td> <td style="text-align: center;">VDC</td> </tr> </table>	Output Voltage			03:	3.3	VDC	05:	5	VDC	09:	9	VDC	12:	12	VDC	15:	15	VDC	24:	24	VDC
Output Power																													
3 Watt																													
Output Quantity																													
S: Single																													
Output Voltage																													
03:	3.3	VDC																											
05:	5	VDC																											
09:	9	VDC																											
12:	12	VDC																											
15:	15	VDC																											
24:	24	VDC																											

MTBF and Reliability

The MTBF of AAF-03 series of AC-DC Power Module has been calculated using

MIL-HDBK 217F NOTICE2, Operating Temperature 25°C, Ground Benign.

Model	MTBF	Unit
AAF-03S03	1,200,000	Hours
AAF-03S05		
AAF-03S09		
AAF-03S12		
AAF-03S15		
AAF-03S24		