

FEATURES

- ▶ Industrial Standard SIP-3 Package
- ▶ Pin-out compatible with LM78xx Linear Regulator
- ▶ Fully Regulated Output Voltage
- ▶ Low Ripple & Noise
- ▶ Excellent Efficiency up to 97%
- ▶ Operating Ambient Temp. Range -40°C to +90°C
- ▶ No Min. Load Requirement
- ▶ Over Temp. and Short Circuit Protection



PRODUCT OVERVIEW

The MINMAX M78AR-0.5 series is a new range of switching regulators designed as a drop-in replacement for old LM78xx linear regulators with low efficiency. The very high efficiency of these step-down converters allow an operating temperature up to 80°C at full-load without need of any heatsink. The regulators come in a package which fits in the standard TO-220 footprint of linear regulators. The high efficiency and low stand-by power consumption of these switching regulators offer the designer a new, cost-efficient solution for many applications.

Model Selection Guide

Model Number	Input Voltage Range ₍₆₎	Output Voltage	Output Current	Max. capacitive Load	Efficiency (typ.)	Efficiency (typ.)
			Max.		@Min. Vin	@Max. Vin
	VDC	VDC	mA	μF	%	%
M78AR015-0.5	4.75 ~ 32	1.5	500	220	73	63
M78AR018-0.5		1.8	500	220	82	71
M78AR025-0.5		2.5	500	220	87	77
M78AR033-0.5		3.3	500	220	91	81
M78AR05-0.5	6.5 ~ 32	5	500	220	94	86
M78AR065-0.5	8 ~ 32	6.5	500	220	95	88
M78AR09-0.5	11 ~ 32	9	500	220	96	92
M78AR12-0.5	15 ~ 32	12	500	220	97	94
M78AR15-0.5	18 ~ 32	15	500	220	97	95

Input Specifications


Parameter	Conditions	Min.	Typ.	Max.	Unit
Input Surge Voltage (1 sec. max.)		-0.3	---	34	VDC
Internal Filter Type		Capacitor			
Input Filter	All Models	Internal Capacitor			
Short Circuit Input Power		---	---	1.5	W
Input Current	@No Load	---	5	---	mA

Output Specifications						
Parameter	Conditions	Min.	Typ.	Max.	Unit	
Output Voltage Setting Accuracy		---	±2.0	±3.0	%Vnom.	
Line Regulation	Vin=Min. to Max. @Full Load	1.5V to 6.5V	---	±0.2	±0.4	%
		9V to 15V	---	±0.1	±0.2	%
Load Regulation	Io=10% to 100%	1.5V to 6.5V	---	±0.4	±0.6	%
		9V to 15V	---	±0.25	±0.4	%
Minimum Load	No minimum Load Requirement					
Ripple & Noise	0-20MHz Bandwidth	1.5V to 6.5V	---	---	30	mV _{P-P}
		9V to 15V	---	---	40	mV _{P-P}
Transient Recovery Time	50% Load Step Change	---	100	---	µsec	
Transient Response Deviation		---	±2	---	%	
Temperature Coefficient		---	---	±0.015	%/°C	
Short Circuit Protection	Continuous, Automatic Recovery					


General Specifications						
Parameter	Conditions	Min.	Typ.	Max.	Unit	
I/O Isolation Voltage	None					
Switching Frequency		280	330	380	kHz	
MTBF(calculated)	MIL-HDBK-217F@25°C, Ground Benign	2,000,000			Hours	

EMC Specifications					
Parameter	Standards & Level			Performance	
EMI	Conduction	EN 55022	With external components		Class A, B
	Radiation		Without external components		
EMS	ESD	EN61000-4-2 Air±8kV			A
	Radiated immunity	EN61000-4-3 3V/m			A
	Fast transient ₍₄₎	EN61000-4-4 ±0.5kV			A
	Conducted immunity	EN61000-4-6 3Vrms			A
	PFMF	EN61000-4-8 3A/m			A

Environmental Specifications						
Parameter	Conditions	Min.	Typ.	Max.	Unit	
Operating Ambient Temperature Range (See Power Derating Curve)		-40	---	+90	°C	
Case Temperature		---	---	+100	°C	
Storage Temperature		-55	---	+125	°C	
Thermal Shutdown	Internal IC junction	---	160	---	°C	
Humidity (non condensing)		---	---	95	% rel. H	
Lead-free reflow solder process (1.5mm from case for 10Sec.)		---	---	260	°C	

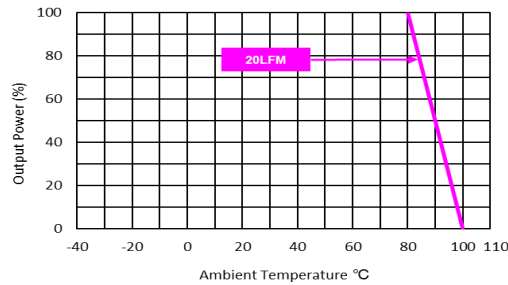Power Derating Curve

Notes

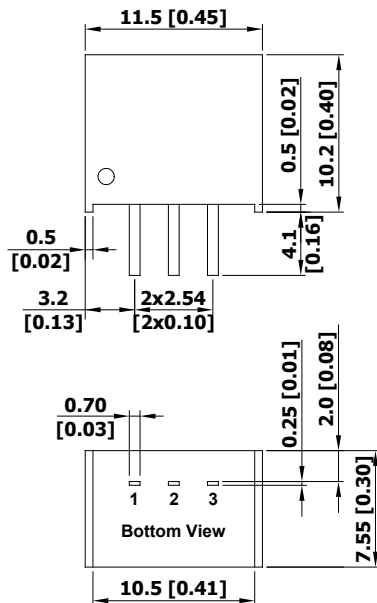- 1 Specifications typical at Ta=+25°C, resistive load, nominal input voltage, rated output current unless otherwise noted.
- 2 Other input and output voltage may be available, please contact MINMAX.
- 3 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 4 To meet EN 55022 Class A, B with an external filter, please contact MINMAX.
- 5 To meet EN61000-4-4 an external capacitor across the input pins is required, please contact MINMAX.
- 6 With a input capacitor 22µF/50V for input voltage >28VDC, the input voltage allows 32VDC, max.
- 7 Specifications are subject to change without notice.

Package Specifications
Mechanical Dimensions

Pin Connections

Pin	Function
1	+Vin
2	GND
3	+Vout

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.5 (X.XX±0.02)
X.XX±0.25 (X.XXX±0.01)
- ▶ Pins ±0.05(±0.002)


Physical Characteristics

Case Size	: 11.5x7.55x10.2mm (0.45x0.30x0.40 inches)
Case Material	: Non-Conductive Black Plastic (flammability to UL 94V-0 rated)
Pin Material	: Phosphor Bronze with Tin Plate Over Nickel Subplate
Weight	: 1.95g

Test Setup

Peak-to-Peak Output Noise Measurement Test


Use a C_{out} 0.47 μ F ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC-DC Converter.

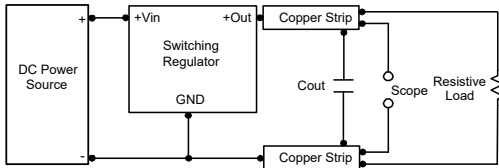

Technical Notes

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 3.3 μ F capacitors at the output.

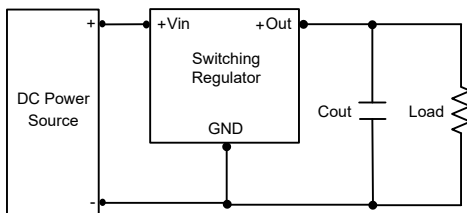

Maximum Capacitive Load

The M78AR-0.5 series has limitation of maximum connected capacitance on the output. The power module may operate in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the data sheet.