



MINMAX[®]

M78AR-0.5 Series

Electric Characteristic Note

M78AR-0.5 Series EC Note

Switching Regulator 0.5A, SIP Package

Features

- ▶ Industrial Standard SIP-3 Package
- ▶ Pin-out compatible with LM78xx Linear Regulator
- ▶ Fully Regulated Output Voltage
- ▶ Low Ripple & Noise
- ▶ Excellent Efficiency up to 97%
- ▶ Operating Ambient Temp. Range -40°C to +90°C
- ▶ No Min. Load Requirement
- ▶ Over Temp. and Short Circuit Protection



Applications

- ▶ Distributed power architectures
- ▶ Workstations
- ▶ Computer equipment
- ▶ Communications equipment

Product Overview

The MINMAX M78AR-0.5 series is a new range of switching regulators designed as a drop-in replacement for old LM78xx linear regulators with low efficiency. The very high efficiency of these step-down converters allow an operating temperature up to 80°C at full-load without need of any heatsink. The regulators come in a package which fits in the standard TO-220 footprint of linear regulators. The high efficiency and low stand-by power consumption of these switching regulators offer the designer a new, cost-efficient solution for many applications.

Table of contents

Model Selection Guide	P2	Recommended Pad Layout	P13
Input Specifications	P2	Test Setup	P14
Output Specifications	P2	Technical Notes	P14
General Specifications	P2	Packaging Information for Tube	P14
EMC Specifications	P3	Wave Soldering Considerations	P15
Environmental Specifications	P3	Hand Welding Parameter	P15
Characteristic Curves	P4	Part Number Structure	P16
Package Specifications	P13	MTBF and Reliability	P16

Model Selection Guide

Model Number	Input Voltage Range ⁽⁶⁾	Output Voltage	Output Current	Max. capacitive Load	Efficiency (typ.)	Efficiency (typ.)
			Max.		@Min. Vin	@Max. Vin
	VDC	VDC	mA	μF	%	%
M78AR015-0.5	4.75 ~ 32	1.5	500	220	73	63
M78AR018-0.5		1.8	500	220	82	71
M78AR025-0.5		2.5	500	220	87	77
M78AR033-0.5		3.3	500	220	91	81
M78AR05-0.5	6.5 ~ 32	5	500	220	94	86
M78AR065-0.5	8 ~ 32	6.5	500	220	95	88
M78AR09-0.5	11 ~ 32	9	500	220	96	92
M78AR12-0.5	15 ~ 32	12	500	220	97	94
M78AR15-0.5	18 ~ 32	15	500	220	97	95

Input Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
Input Surge Voltage (1 sec. max.)		-0.3	---	34	VDC
Internal Filter Type		Capacitor			
Input Filter	All Models	Internal Capacitor			
Short Circuit Input Power		---	---	1.5	W
Input Current	@No Load	---	5	---	mA

Output Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit	
Output Voltage Setting Accuracy		---	±2.0	±3.0	%Vnom.	
Line Regulation	Vin=Min. to Max. @Full Load	1.5V to 6.5V	---	±0.2	±0.4	%
		9V to 15V	---	±0.1	±0.2	%
Load Regulation	Io=10% to 100%	1.5V to 6.5V	---	±0.4	±0.6	%
		9V to 15V	---	±0.25	±0.4	%
Minimum Load	No minimum Load Requirement					
Ripple & Noise	0-20MHz Bandwidth	1.5V to 6.5V	---	---	30	mV _{P-P}
		9V to 15V	---	---	40	mV _{P-P}
Transient Recovery Time	50% Load Step Change	---	100	---	μsec	
Transient Response Deviation		---	±2	---	%	
Temperature Coefficient		---	---	±0.015	%/°C	
Short Circuit Protection	Continuous, Automatic Recovery					

General Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage		None			
Switching Frequency		280	330	380	kHz
MTBF(calculated)	MIL-HDBK-217F@25°C, Ground Benign	2,000,000			Hours

EMC Specifications


Parameter	Standards & Level			Performance
EMI ₍₄₎	Conduction	EN 55022	With external components	Class A, B
	Radiation		Without external components	
EMS ₍₄₎	ESD	EN 61000-4-2 Air±8kV		A
	Radiated immunity	EN 61000-4-3 3V/m		A
	Fast transient	EN 61000-4-4 ±0.5kV		A
	Conducted immunity	EN 61000-4-6 3Vrms		A
	PFMF	EN 61000-4-8 3A/m		A

Environmental Specifications					
Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating Ambient Temperature Range (See Power Derating Curve)		-40	---	+90	°C
Case Temperature		---	---	+100	°C
Storage Temperature		-55	---	+125	°C
Thermal Shutdown	Internal IC junction	---	160	---	°C
Humidity (non condensing)		---	---	95	% rel. H
Lead-free reflow solder process (1.5mm from case for 10Sec.)		---	---	260	°C


Notes	
1	Specifications typical at Ta=+25°C, resistive load, nominal input voltage, rated output current unless otherwise noted.
2	Other input and output voltage may be available, please contact MINMAX.
3	We recommend to protect the converter by a slow blow fuse in the input supply line.
4	The external components might be required to meet EMI/EMS standard for some of test items. Please contact MINMAX for the solution in detail.
5	With a input capacitor 22μF/50V for input voltage >28VDC, the input voltage allows 32VDC, max.
6	Specifications are subject to change without notice.

Characteristic Curves


All test conditions are at 25°C The figures are identical for M78AR015-0.5

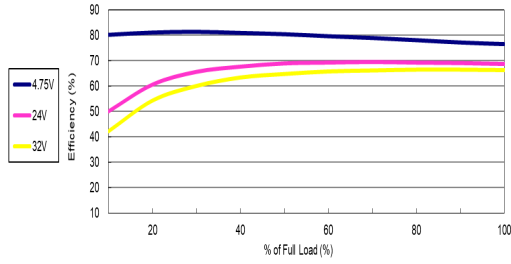


Efficiency Versus Output Current

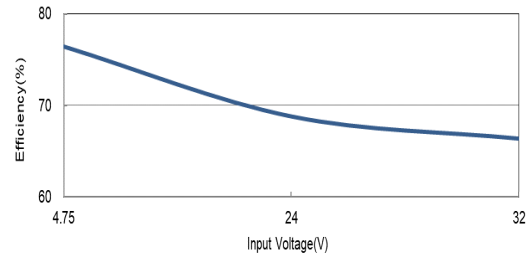


Efficiency Versus Input Voltage Full Load

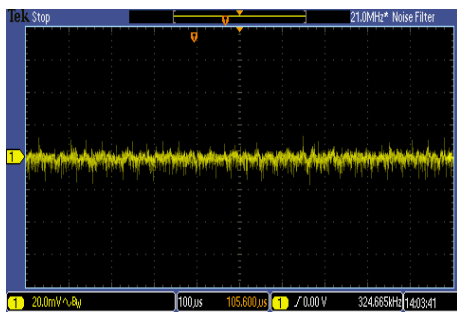


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

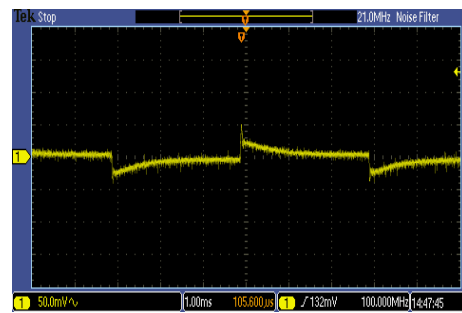


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load ; $V_{in}=V_{in\ nom}$

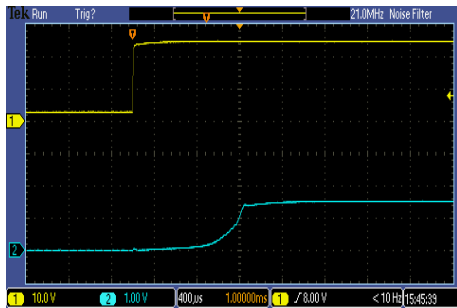

Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

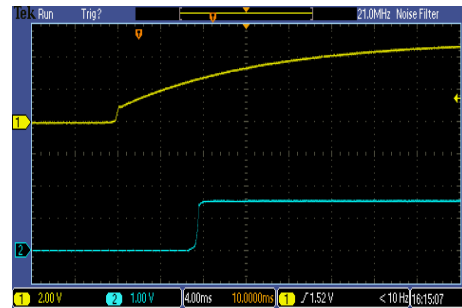


ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

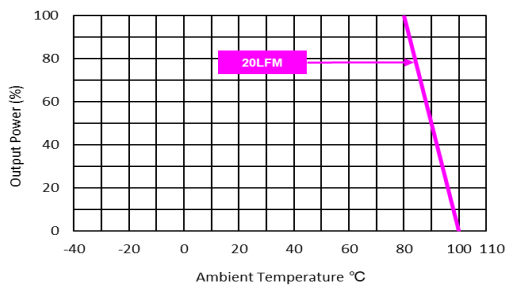


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for M78AR018-0.5

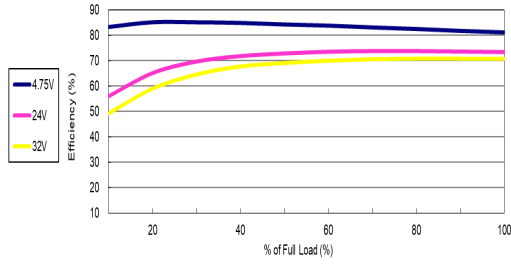


Efficiency Versus Output Current

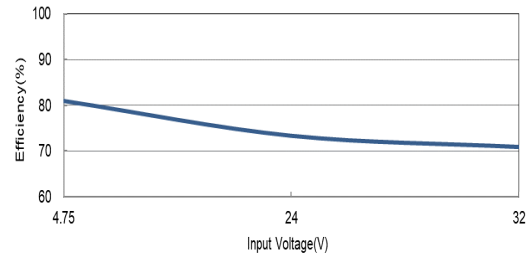


Efficiency Versus Input Voltage Full Load

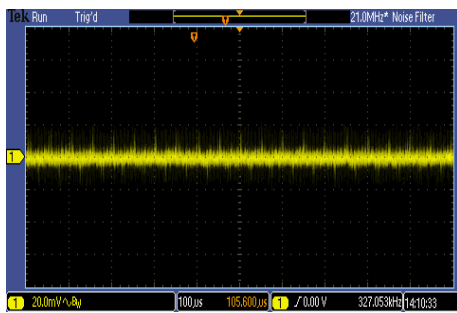


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

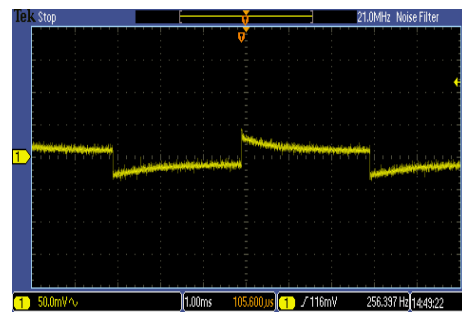


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load; $V_{in}=V_{in\ nom}$

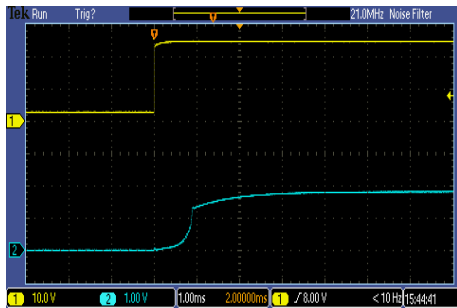

Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

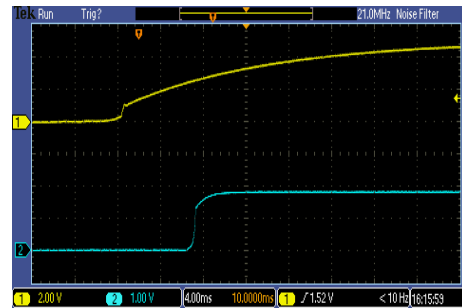


ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

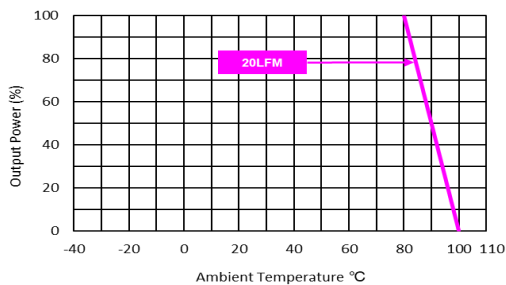


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for M78AR025-0.5

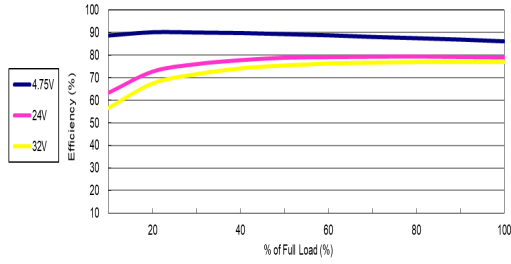


Efficiency Versus Output Current

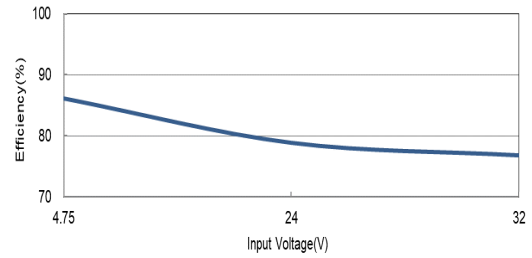


Efficiency Versus Input Voltage Full Load

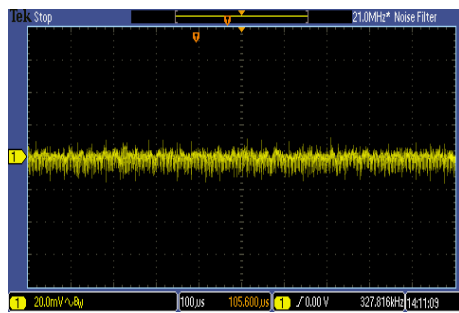


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

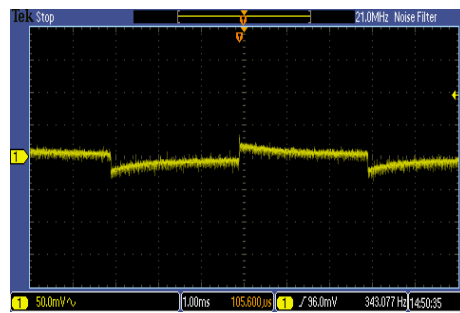


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load; $V_{in}=V_{in\ nom}$

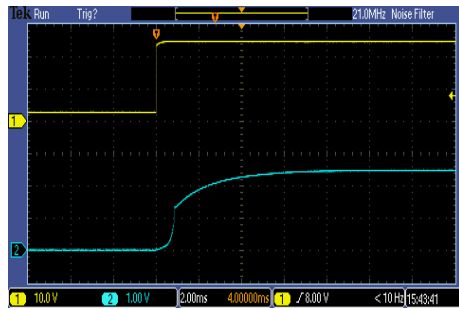

Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

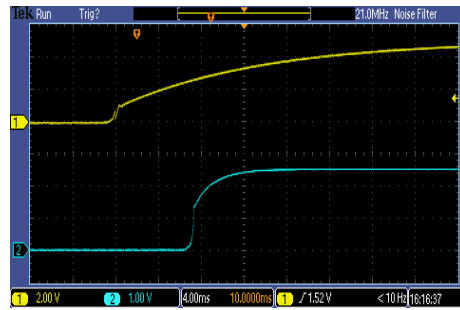


ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

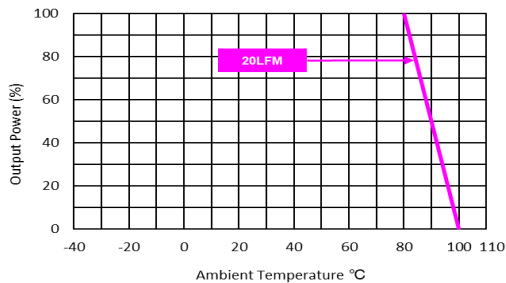


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for M78AR033-0.5

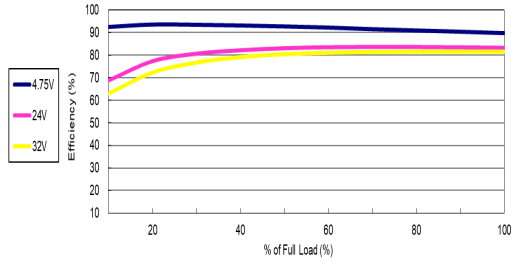


Efficiency Versus Output Current

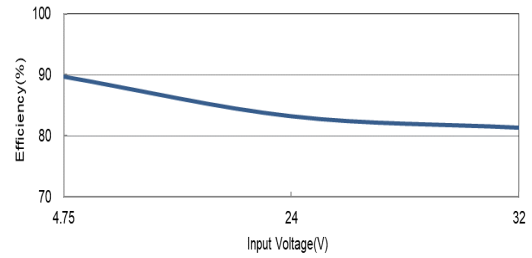


Efficiency Versus Input Voltage Full Load

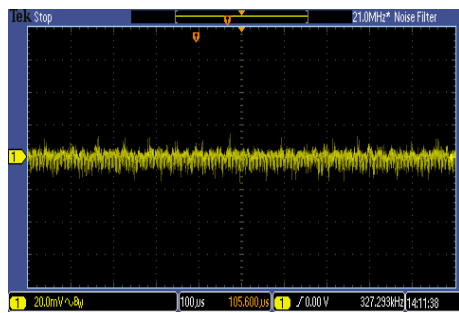


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

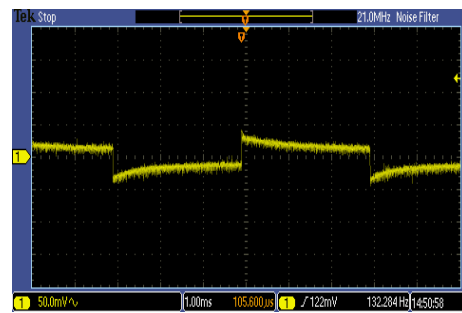


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load; $V_{in}=V_{in\ nom}$

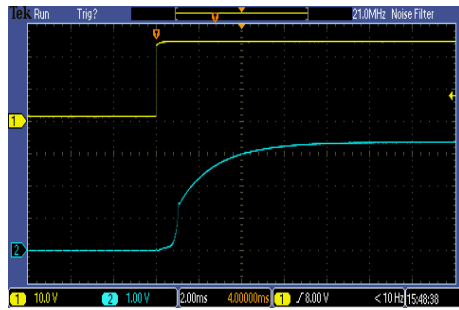

Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

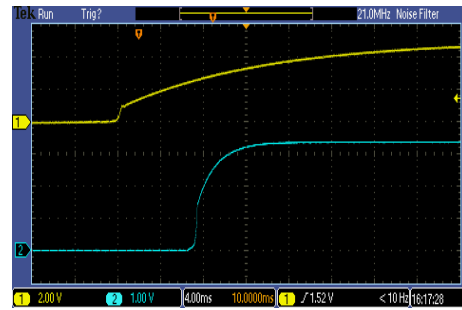


ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

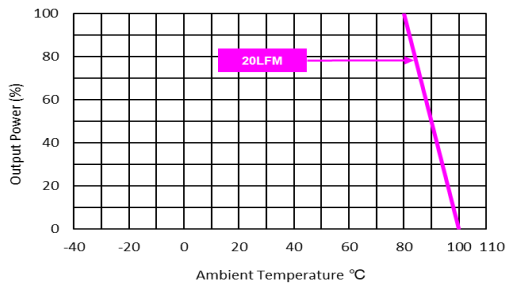


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for M78AR05-0.5

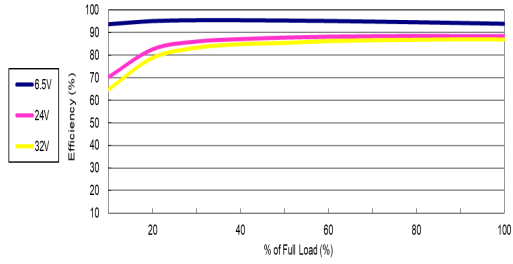


Efficiency Versus Output Current

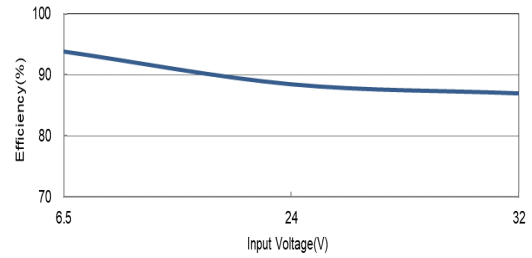


Efficiency Versus Input Voltage Full Load

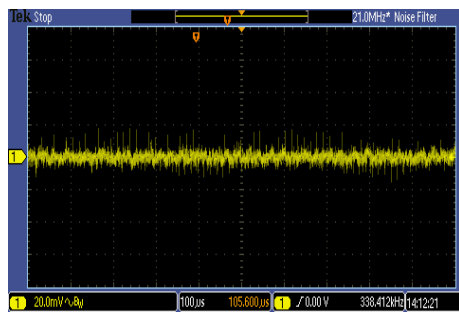

Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

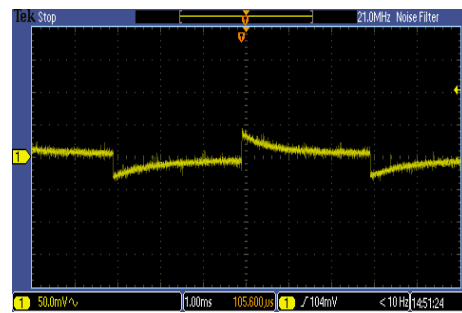


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load ; $V_{in}=V_{in\ nom}$

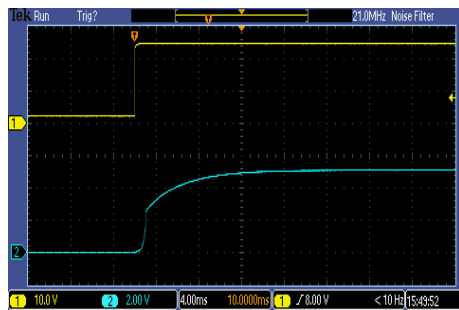

Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load




ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

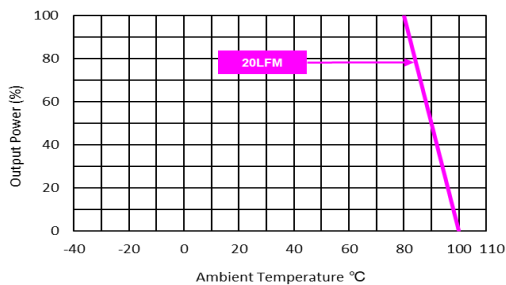


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C. The figures are identical for M78AR065-0.5

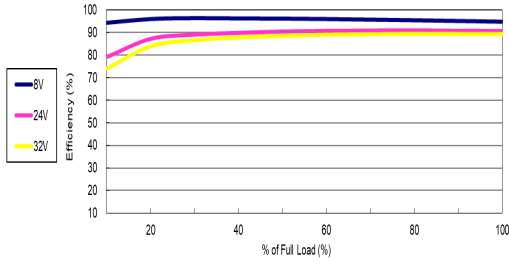


Efficiency Versus Output Current

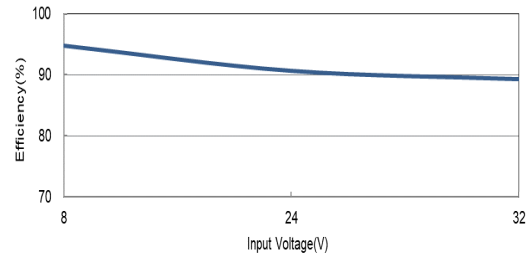


Efficiency Versus Input Voltage Full Load

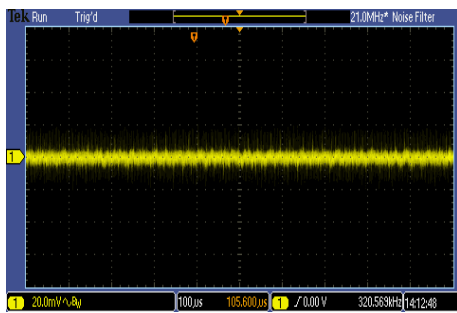


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

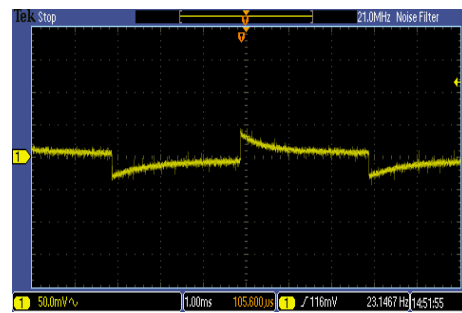


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load; $V_{in}=V_{in\ nom}$

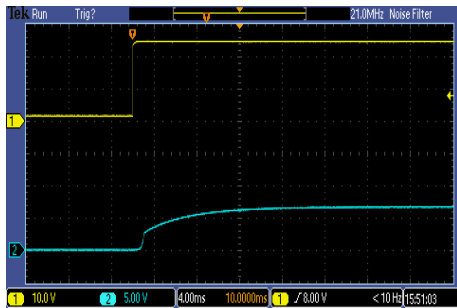

Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

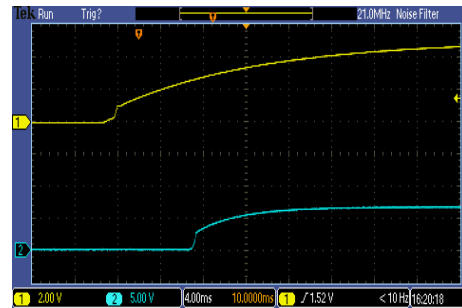


ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

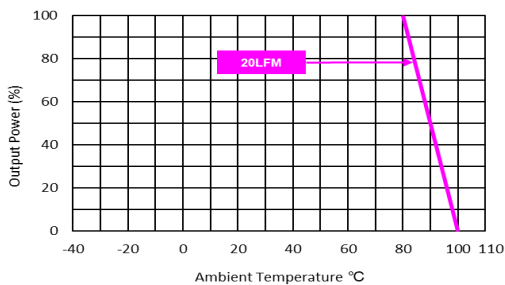


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for M78AR09-0.5

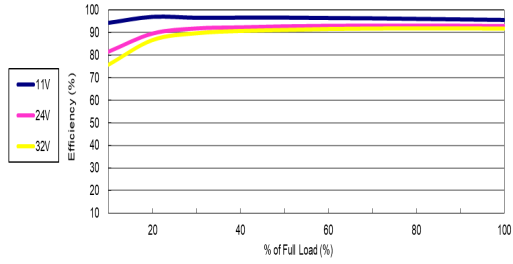


Efficiency Versus Output Current

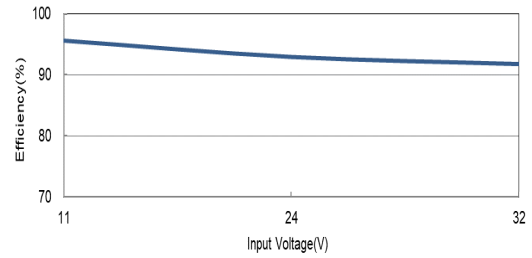


Efficiency Versus Input Voltage Full Load

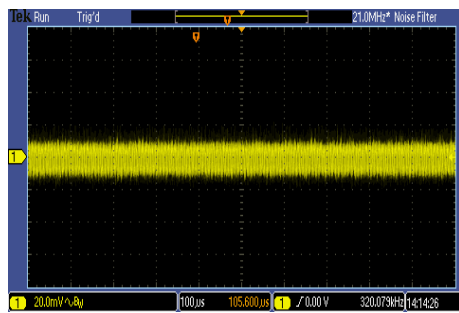

Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

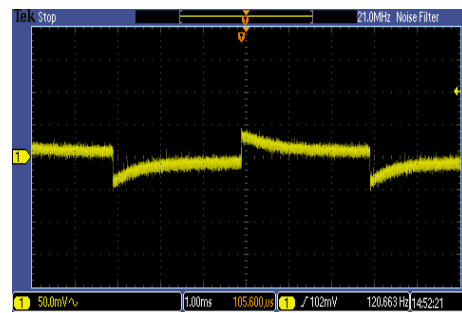


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load ; $V_{in}=V_{in\ nom}$

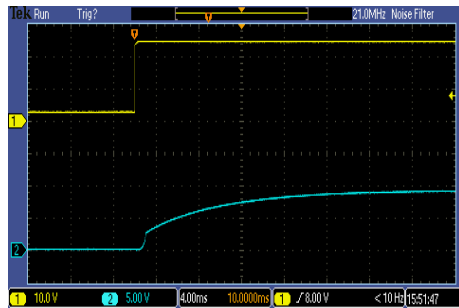

Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load




ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

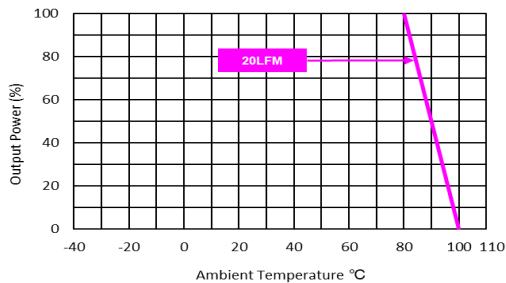


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C. The figures are identical for M78AR12-0.5

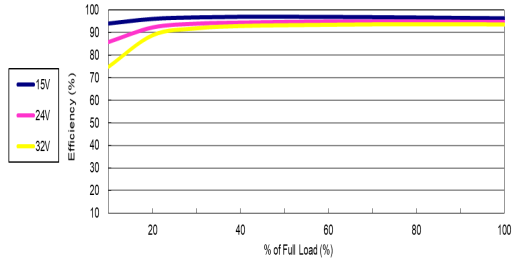


Efficiency Versus Output Current

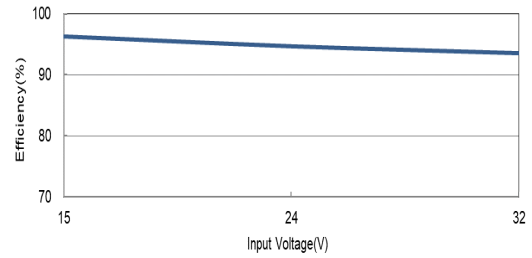

Efficiency Versus Input Voltage Full Load

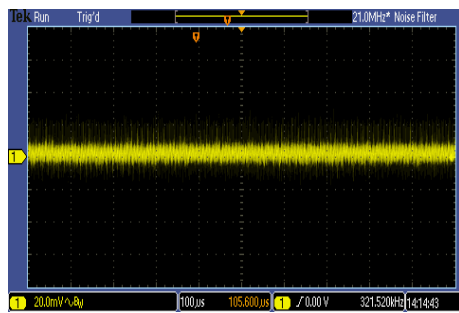


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

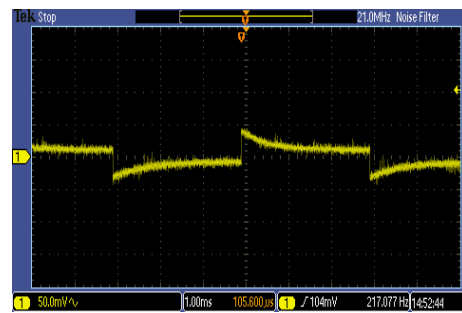


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load; $V_{in}=V_{in\ nom}$



Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

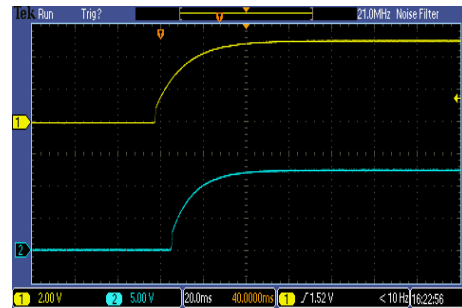


ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

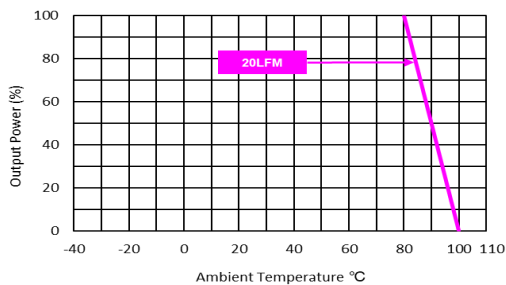


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for M78AR15-0.5

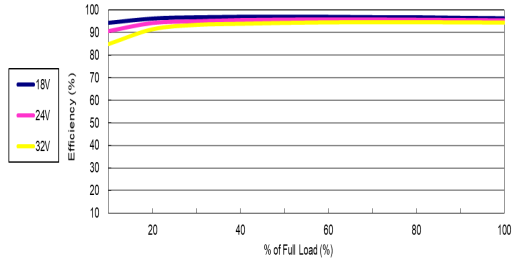


Efficiency Versus Output Current

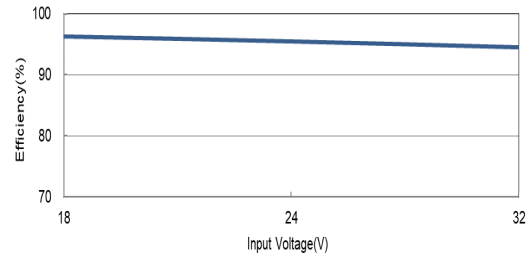

Efficiency Versus Input Voltage Full Load

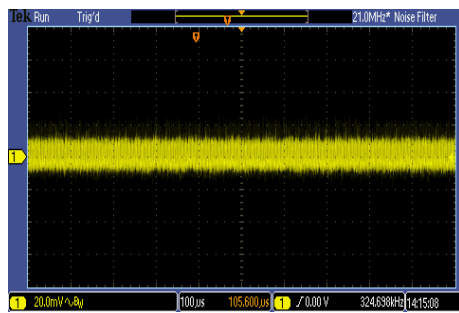


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

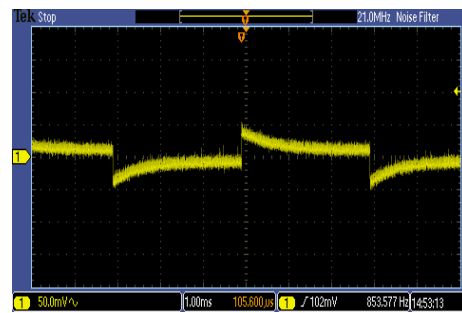


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load ; $V_{in}=V_{in\ nom}$



Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

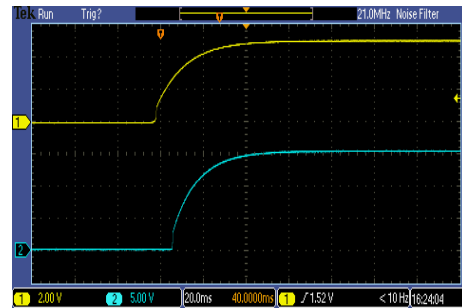


ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

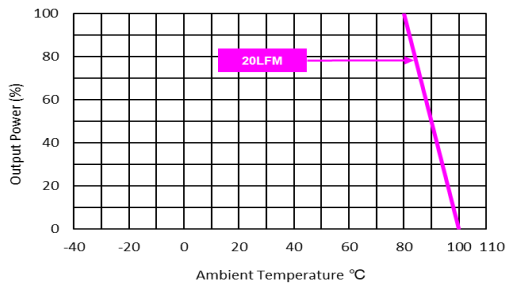

Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Package Specifications

Mechanical Dimensions

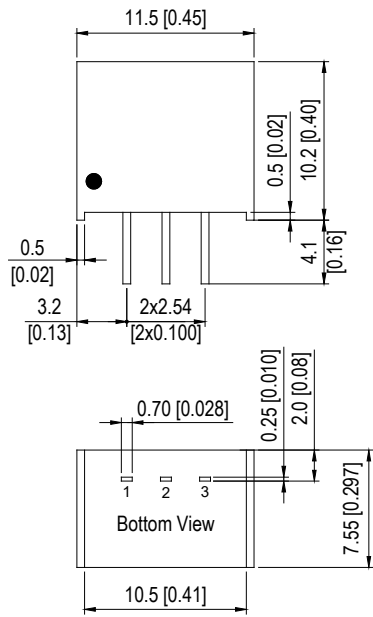

Pin Connections


Pin	Function
1	+Vin
2	GND
3	+Vout

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.5 (X.XX±0.02)
X.XX±0.25 (X.XXX±0.01)
- ▶ Pins ±0.05(±0.002)

Physical Characteristics

Case Size	: 11.5x7.55x10.2mm (0.45x0.30x0.40 inches)
Case Material	: Plastic resin (flammability to UL 94V-0 rated)
Pin Material	: Phosphor Bronze
Weight	: 1.95g


Recommended Pad Layout

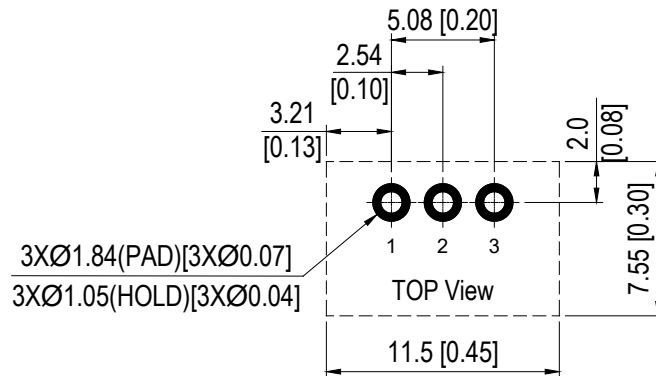

Test Setup

Peak-to-Peak Output Noise Measurement Test


Use a C_{out} 0.47 μ F ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC-DC Converter.

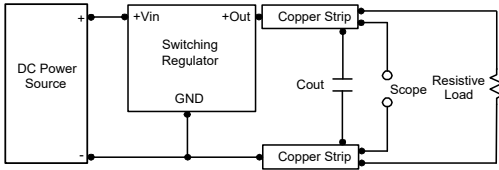

Technical Notes

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 3.3 μ F capacitors at the output.

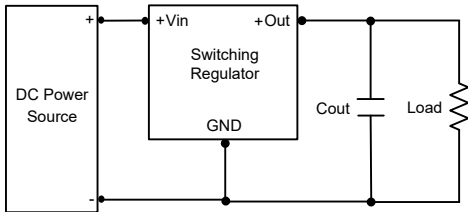



Maximum Capacitive Load

The M78AR-0.5 series has limitation of maximum connected capacitance on the output. The power module may operate in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the data sheet.

Packaging Information for Tube

Tube


Plug

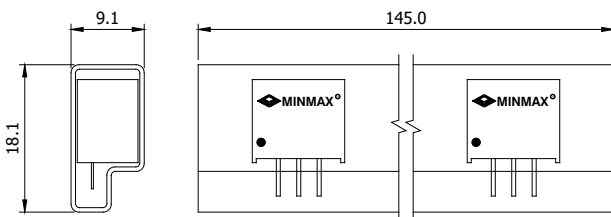

Unit: mm
10 PCS per TUBE

Wave Soldering Considerations

Lead free wave solder profile

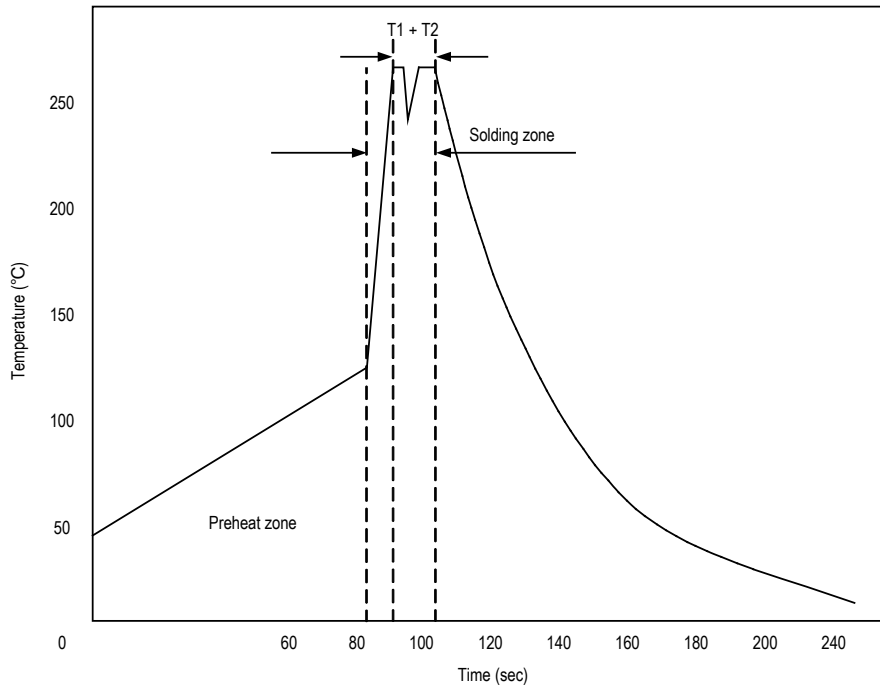

Zone	Reference Parameter
Preheat	Rise temp. speed : 3°C/sec max.
zone	Preheat temp. : 100~130°C
Actual	Peak temp. : 250~260°C
heating	Peak time(T1+T2) : 4~6 sec

Hand Welding Parameter

Reference Solder: Sn-Ag-Cu : Sn-Cu : Sn-Ag

Hand Welding: Soldering iron : Power 60W

Welding Time: 2~4 sec

Temp.: 380~400°C

Part Number Structure					
M	78	A	R	015	- 0.5
	Pin-out compatible With LM78xx Linear Regulator	Package Type SIP-3	Output Regulation Regulated	Output Voltage 015: 1.5 VDC 018: 1.8 VDC 025: 2.5 VDC 033: 3.3 VDC 05: 5 VDC 065: 6.5 VDC 09: 9 VDC 12: 12 VDC 15: 15 VDC	Output Current 0.5: 0.5 A

MTBF and Reliability		
The MTBF of M78AR-0.5 series of DC-DC converters has been calculated using MIL-HDBK 217F NOTICE2, Operating Temperature 25°C, Ground Benign.		
Model	MTBF	Unit
M78AR015-0.5	2,114,508	Hours
M78AR018-0.5	3,464,940	
M78AR025-0.5	3,329,876	
M78AR033-0.5	3,036,568	
M78AR05-0.5	2,428,125	
M78AR065-0.5	2,018,773	
M78AR09-0.5	2,598,682	
M78AR12-0.5	2,445,796	
M78AR15-0.5	2,500,910	