

FEATURES

- ▶ Industrial SMD Package
- ▶ Fully Regulated Output Voltage
- ▶ Low Ripple & Noise
- ▶ Excellent Efficiency up to 97%
- ▶ Operating Ambient Temp. Range -40°C to +90°C
- ▶ No Min. Load Requirement
- ▶ Over Temp. and Short Circuit Protection
- ▶ Remote ON/OFF Control, Output Voltage Trim
- ▶ Qualified for Lead-free Reflow Solder Process
According to IPC/JEDEC J-STD-020D.1
- ▶ Tape & Reel Package Available



PRODUCT OVERVIEW

The MINMAX M78SAR-0.5 series is a new range of switching regulators designed as a drop-in replacement for old LM78xx linear regulators with low efficiency. The very high efficiency of these step-down converters allow an operating temperature up to 80°C at full-load without need of any heatsink. The high efficiency and low stand-by power consumption of these switching regulators offer the designer a new, cost-efficient solution for many applications.

Model Selection Guide

| Model Number | Input Voltage Range ⁽⁶⁾ | Output Voltage | | Output Current | Max. capacitive Load | Efficiency (typ.) | |
|---------------|------------------------------------|----------------|-----------------------------|----------------|----------------------|-------------------|-----------|
| | | Normal | Adjust Range ⁽⁶⁾ | | | @Min. Vin | @Max. Vin |
| | | VDC | VDC | VDC | | mA | μF |
| M78SAR015-0.5 | 4.75 ~ 32 | 1.5 | 1.4~2.5 | 500 | 220 | 73 | 63 |
| M78SAR018-0.5 | | 1.8 | 1.5~3 | 500 | 220 | 82 | 71 |
| M78SAR025-0.5 | | 2.5 | 1.5~3 | 500 | 220 | 87 | 77 |
| M78SAR033-0.5 | | 3.3 | 3~5.5 | 500 | 220 | 91 | 81 |
| M78SAR05-0.5 | 6.5 ~ 32 | 5 | 3~8 | 500 | 220 | 94 | 86 |
| M78SAR065-0.5 | 8 ~ 32 | 6.5 | 3.3~11 | 500 | 220 | 95 | 88 |
| M78SAR09-0.5 | 11 ~ 32 | 9 | 4.5~12.6 | 500 | 220 | 96 | 92 |
| M78SAR12-0.5 | 15 ~ 32 | 12 | 4.5~13.5 | 500 | 220 | 97 | 94 |
| M78SAR15-0.5 | 18 ~ 32 | 15 | 4.5~15.5 | 500 | 220 | 97 | 95 |

Input Specifications

| Parameter | Conditions | Min. | Typ. | Max. | Unit |
|-----------------------------------|------------|--------------------|------|------|------|
| Input Surge Voltage (1 sec. max.) | | -0.3 | --- | 34 | VDC |
| Internal Filter Type | | Capacitor | | | |
| Input Filter | All Models | Internal Capacitor | | | |
| Short Circuit Input Power | | --- | --- | 1.5 | W |
| Input Current | @No Load | --- | 5 | --- | mA |

Remote On/Off Control


| Parameter | Conditions | Min. | Typ. | Max. | Unit |
|-----------------------|-------------|--------------------|------|------|------|
| Converter On | | Open or 2.4V<Vr<5V | | | |
| Converter Off | | GND or 0<Vr<1.6V | | | |
| Standby Input Current | Nominal Vin | --- | --- | 35 | μA |

| Output Specifications | | | | | | |
|---------------------------------|--------------------------------|--------------|------|-------|--------|-------------------|
| Parameter | Conditions | | Min. | Typ. | Max. | Unit |
| Output Voltage Setting Accuracy | | | --- | ±2.0 | ±3.0 | %Vnom. |
| Line Regulation | Vin=Min. to Max. @Full Load | 1.5V to 6.5V | --- | ±0.2 | ±0.4 | % |
| | | 9V to 15V | --- | ±0.1 | ±0.2 | % |
| Load Regulation | Io=10% to 100% | 1.5V to 6.5V | --- | ±0.4 | ±0.6 | % |
| | | 9V to 15V | --- | ±0.25 | ±0.4 | % |
| Minimum Load | No minimum Load Requirement | | | | | |
| Ripple & Noise | 0-20MHz Bandwidth | 1.5V to 6.5V | --- | --- | 30 | mV _{P-P} |
| | | 9V to 15V | --- | --- | 40 | mV _{P-P} |
| Transient Recovery Time | 50% Load Step Change | | --- | 100 | --- | µsec |
| Transient Response Deviation | | | --- | ±2 | --- | % |
| Temperature Coefficient | | | --- | --- | ±0.015 | %/°C |
| Short Circuit Protection | Continuous, Automatic Recovery | | | | | |

| General Specifications | | | | | | |
|----------------------------------|-----------------------------------|--|-----------|------|------|-------|
| Parameter | Conditions | | Min. | Typ. | Max. | Unit |
| I/O Isolation Voltage | none | | | | | |
| Switching Frequency | | | 280 | 330 | 380 | kHz |
| MTBF(calculated) | MIL-HDBK-217F@25°C, Ground Benign | | 2,000,000 | | | Hours |
| Moisture Sensitivity Level (MSL) | IPC/JEDEC J-STD-020D.1 | | Level 2 | | | |

| EMC Specifications | | | | | |
|--------------------|-------------------------------|----------------------|-----------------------------|-------------|------------|
| Parameter | Standards & Level | | | Performance | |
| EMI | Conduction | EN 55022 | With external components | | Class A, B |
| | Radiation | | Without external components | | |
| EMS | ESD | EN 61000-4-2 Air±8kV | | | A |
| | Radiated immunity | EN 61000-4-3 3V/m | | | A |
| | Fast transient ₍₄₎ | EN 61000-4-4 ±0.5kV | | | A |
| | Conducted immunity | EN 61000-4-6 3Vrms | | | A |
| | PFMF | EN 61000-4-8 3A/m | | | A |


| Environmental Specifications | | | | | | |
|---|------------------------|--|------|------|------|----------|
| Parameter | Conditions | | Min. | Typ. | Max. | Unit |
| Operating Ambient Temperature Range (See Power Derating Curve) | | | -40 | --- | +90 | °C |
| Case Temperature | | | --- | --- | +100 | °C |
| Storage Temperature | | | -55 | --- | +125 | °C |
| Thermal Shutdown | Internal IC junction | | --- | 160 | --- | °C |
| Humidity (non condensing) | | | --- | --- | 95 | % rel. H |
| Lead-free reflow solder process | IPC/JEDEC J-STD-020D.1 | | | | | |


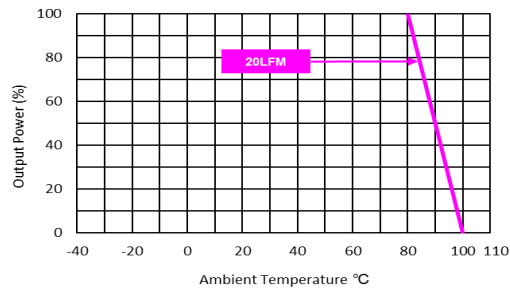
Power Derating Curve**Notes**

- 1 Specifications typical at $T_a=+25^{\circ}\text{C}$, resistive load, nominal input voltage, rated output current unless otherwise noted.
- 2 Other input and output voltage may be available, please contact MINMAX.
- 3 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 4 To meet EN 55022 Class A, B with an external filter, please contact MINMAX.
- 5 To meet EN 61000-4-4 an external capacitor across the input pins is required, please contact MINMAX.
- 6 With a input capacitor $22\mu\text{F}/50\text{V}$ for input voltage $>28\text{VDC}$, the input voltage allows 32VDC , max.
- 7 Specifications are subject to change without notice.

Adjustment Resistor Values

| | M78SAR015-0.5 | | M78SAR018-0.5 | | M78SAR025-0.5 | | M78SAR033-0.5 | | M78SAR05-0.5 | | M78SAR065-0.5 | | M78SAR09-0.5 | | M78SAR12-0.5 | | M78SAR15-0.5 | |
|------------|---------------|---------|---------------|--------|---------------|--------|---------------|--------|--------------|--------|---------------|--------|--------------|--------|--------------|---------|--------------|--------|
| Vout(nom.) | 1.5VDC | | 1.8VDC | | 2.5VDC | | 3.3VDC | | 5.0VDC | | 6.5VDC | | 9.0VDC | | 12VDC | | 15VDC | |
| Vout(adj) | R1 | R2 | R1 | R2 | R1 | R2 | R1 | R2 | R1 | R2 | R1 | R2 | R1 | R2 | R1 | R2 | R1 | R2 |
| 1.4 (V) | 1 KΩ | | | | | | | | | | | | | | | | | |
| 1.5 (V) | | | 3KΩ | | 200Ω | | | | | | | | | | | | | |
| 1.8 (V) | | 6.49 KΩ | | | 12KΩ | | | | | | | | | | | | | |
| 2.5 (V) | | 0.47 KΩ | | 11.8KΩ | | | | | | | | | | | | | | |
| 3.0 (V) | | | | 4.64KΩ | | 44.2KΩ | 88.4KΩ | | 17KΩ | | | | | | | | | |
| 3.3 (V) | | | | | | | | | 27KΩ | | 15KΩ | | | | | | | |
| 3.6 (V) | | | | | | | | 60.4KΩ | 42KΩ | | 21.5KΩ | | | | | | | |
| 3.9 (V) | | | | | | | | 28KΩ | 58KΩ | | 30.1KΩ | | | | | | | |
| 4.5 (V) | | | | | | | | 11.3KΩ | 180KΩ | | 56.3KΩ | | 26KΩ | | 17KΩ | | 10.5 KΩ | |
| 4.9 (V) | | | | | | | | 7.15KΩ | 850KΩ | | 78.7KΩ | | 36KΩ | | 24KΩ | | 15.8 KΩ | |
| 5.0 (V) | | | | | | | | 6.34KΩ | | | 86KΩ | | 39KΩ | | 26KΩ | | 17.4 KΩ | |
| 5.1 (V) | | | | | | | | 5.9KΩ | | 231KΩ | 97KΩ | | 42KΩ | | 28KΩ | | 18.7 KΩ | |
| 5.5 (V) | | | | | | | | 3.9KΩ | | 56.2KΩ | 154KΩ | | 56KΩ | | 36KΩ | | 24.9 KΩ | |
| 6.5 (V) | | | | | | | | | | 14KΩ | | | 112KΩ | | 63KΩ | | 42.2 KΩ | |
| 8.0 (V) | | | | | | | | | | 2.32KΩ | | 22.6KΩ | 400KΩ | | 125KΩ | | 78.7 KΩ | |
| 9.0 (V) | | | | | | | | | | | | 9.53KΩ | | | 200KΩ | | 113 KΩ | |
| 10 (V) | | | | | | | | | | | | 3.92KΩ | | 54.9KΩ | 345KΩ | | 160 KΩ | |
| 11 (V) | | | | | | | | | | | | 825Ω | | 16.5KΩ | 740KΩ | | 232 KΩ | |
| 12 (V) | | | | | | | | | | | | | | 3.6KΩ | | | 340 KΩ | |
| 12.6 (V) | | | | | | | | | | | | | | 0Ω | | 180KΩ | 464 KΩ | |
| 13.5 (V) | | | | | | | | | | | | | | | | 57.6 KΩ | 787 KΩ | |
| 15.5 (V) | | | | | | | | | | | | | | | | | | 300 KΩ |

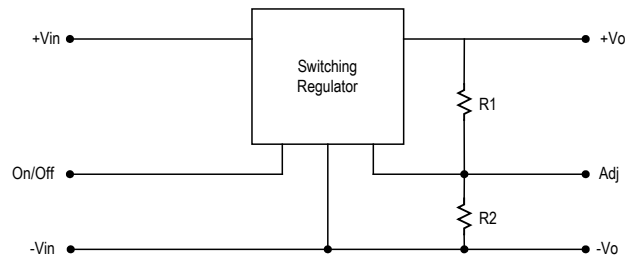

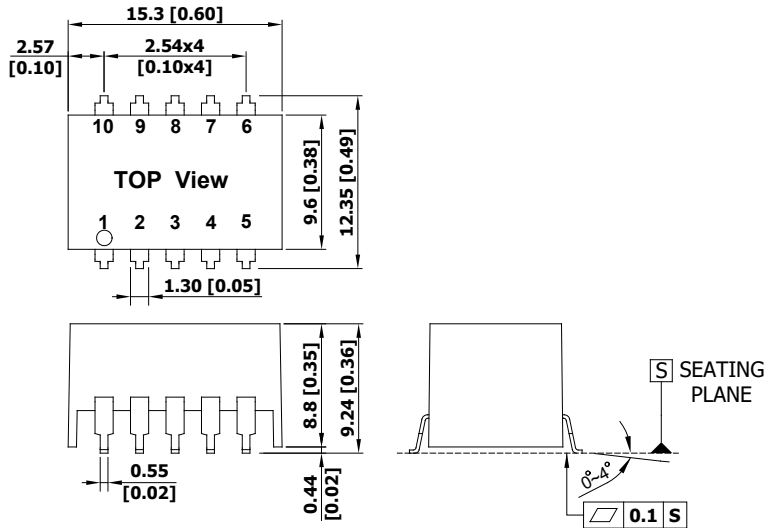Package Specifications
Mechanical Dimensions

Connecting Pin Patterns


- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.5 (X.XX±0.02)
X.XX±0.25 (X.XXX±0.01)
- ▶ Pins ±0.05(±0.002)

Pin Connections

| Pin | Function |
|-----|---------------|
| 1 | +Vin |
| 2 | +Vin |
| 3 | GND |
| 4 | +Vout |
| 5 | +Vout |
| 6 | Vadj. |
| 7 | GND |
| 8 | GND |
| 9 | GND |
| 10 | Remote On/Off |


Physical Characteristics

| | |
|---------------|---|
| Case Size | : 15.3x9.6x8.8mm (0.60x0.38x0.35 inches) |
| Case Material | : Non-Conductive Black Plastic (flammability to UL 94V-0 rated) |
| Pin Material | : Phosphor Bronze with Tin Plate Over Nickel Subplate |
| Weight | : 1.7g |

Test Setup

Peak-to-Peak Output Noise Measurement Test


Use a C_{out} 0.47 μ F ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC-DC Converter.

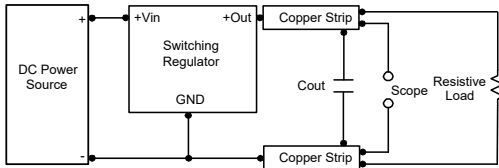

Technical Notes

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 3.3 μ F capacitors at the output.

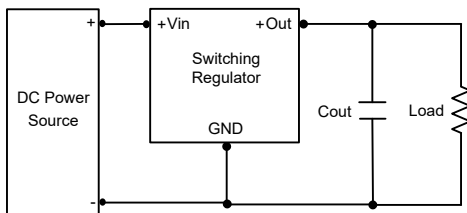

Maximum Capacitive Load

The M78SAR-0.5 series has limitation of maximum connected capacitance on the output. The power module may operate in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the data sheet.