

**FEATURES**

- ▶ Smallest Encapsulated 15W Converter
- ▶ Industrial Standard DIP-16 Package
- ▶ Ultra-wide 4:1 Input Voltage Range
- ▶ Fully Regulated Output Voltage
- ▶ I/O Isolation 1500 VDC
- ▶ Operating Ambient Temp. Range -40°C to +85°C
- ▶ Low No Load Power Consumption
- ▶ No Min. Load Requirement
- ▶ Under-voltage, Overload and Short Circuit Protection
- ▶ Shielded Metal Case with Insulated Baseplate
- ▶ Conducted EMI EN 55032 Class A Approved
- ▶ UL/cUL/IEC/EN 62368-1 Safety Approval & CE Marking

**NEW**

**PRODUCT OVERVIEW**

The MDWI15 series gives designers the flexibility to match the choice of converter to specific application requirements. The high power density of MDWI15 series, at 74W/in<sup>3</sup>, is expected to make it popular with manufacturers of industrial, transportation and renewable energy equipment where space-constrained is critical. This product offers a full 15Watt isolated DC-DC converter within a small encapsulated DIP-16 package which occupied only 0.5in<sup>2</sup> of PCB space. There are 14 models available for 24 & 48VDC with ultra-wide 4:1 input voltage range. Further features included under-voltage protection, overload protection, short circuit protection, very low no load power consumption, no min. load requirement and conducted EMI class A approved as well. High efficiency allows operating temperatures range of -40°C to 85°C. All models have been qualified per the CB scheme with safety approvals to UL/cUL/IEC/EN 62368-1.

**Model Selection Guide**

Model Number	Input Voltage (Range) VDC	Output Voltage VDC	Output Current Max. mA	Input Current		Max. capacitive Load μF	Efficiency (typ.) @Max. Load %
				@Max. Load mA(typ.)	@No Load mA(typ.)		
MDWI15-24S051	24 (9 ~ 36)	5.1	2940	726	10	1800	86
MDWI15-24S12		12	1250	718		820	87
MDWI15-24S15		15	1000	718		820	87
MDWI15-24S24		24	625	718		270	87
MDWI15-24D12		±12	±625	718		#560	87
MDWI15-24D15		±15	±500	718		#270	87
MDWI15-48S051		48 (18 ~ 75)	5.1	2940		363	7
MDWI15-48S12	12		1250	359	820	87	
MDWI15-48S15	15		1000	359	820	87	
MDWI15-48S24	24		625	359	270	87	
MDWI15-48D12	±12		±625	359	#560	87	
MDWI15-48D15	±15		±500	359	#270	87	

# For each output

**Input Specifications**

Parameter	Conditions / Model	Min.	Typ.	Max.	Unit
Input Surge Voltage (1 sec. max.)	24V Input Models	-0.7	---	50	VDC
	48V Input Models	-0.7	---	100	
Start-Up Threshold Voltage	24V Input Models	---	---	9	
	48V Input Models	---	---	18	
Under Voltage Shutdown	24V Input Models	---	8	---	
	48V Input Models	---	16	---	
Start Up Time (Power On)	Nominal Vin and Constant Resistive Load	---	30	---	mS
Input Filter	All Models	Internal Pi Type			

**Output Specifications**

Parameter	Conditions	Min.	Typ.	Max.	Unit	
Output Voltage Setting Accuracy		---	---	±1.0	%Vnom.	
Output Voltage Balance	Dual Output, Balanced Loads	---	±1.0	±2.0	%	
Line Regulation	Vin=Min. to Max. @Full Load	---	±0.2	±0.8	%	
Load Regulation	Io=0% to 100%	---	---	±1.0	%	
Load Cross Regulation (Dual Output Models)	Asymmetrical Load 25/100% Full Load	---	---	±5.0	%	
Minimum Load	No minimum Load Requirement					
Ripple & Noise	0-20 MHz Bandwidth	Measured with a 2.2µF/50V MLCC	---	70	---	mV <sub>P-P</sub>
Transient Recovery Time	25% Load Step Change	---	---	500	µsec	
Transient Response Deviation		---	±3	±5	%	
Temperature Coefficient		---	±0.01	±0.02	%/°C	
Over Load Protection	Hiccup	110	160	---	%	
Short Circuit Protection	Continuous, Automatic Recovery (Hiccup Mode 0.3Hz typ.)					

**General Specifications**

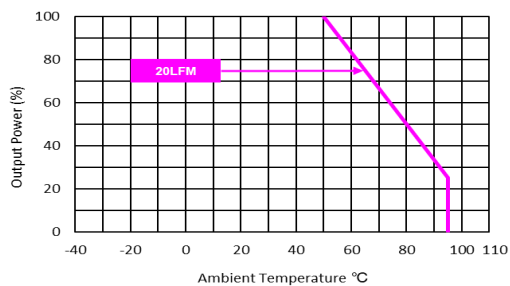
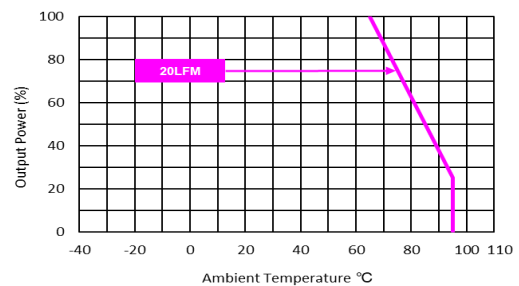
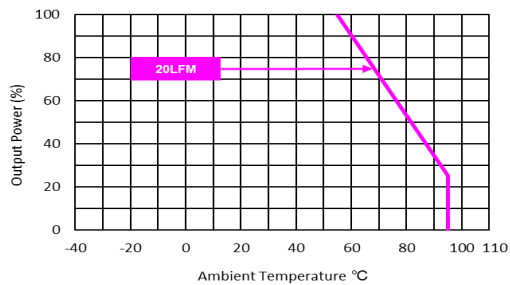
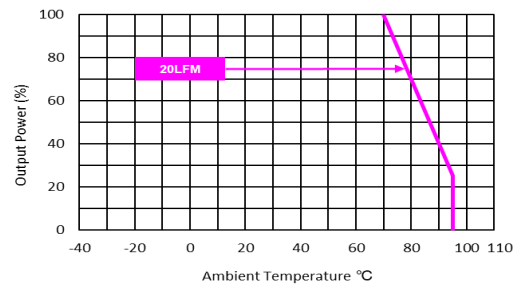
Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	60 Seconds	1500	---	---	VDC
	1 Second	1800	---	---	VDC
Isolation Voltage Input/Output to case		1000	---	---	VDC
I/O Isolation Resistance	500 VDC	1000	---	---	MΩ
I/O Isolation Capacitance	100kHz, 1V	---	---	2200	pF
Switching Frequency		---	480	---	kHz
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign	2,026,549	---	---	Hours
Safety Approvals	UL/cUL 62368-1 recognition(UL certificate), IEC/EN 62368-1(CB report)				

**EMC Specifications**

Parameter	Standards & Level			Performance
EMI	Conduction	EN 55032	Without external components	Class A <sup>(5)</sup>
	Radiation		With external components	
EMS	EN 55024, EN 55035			A
	ESD	Direct discharge	Indirect discharge HCP & VCP	
		EN 61000-4-2 Air ± 8kV, Contact ± 6kV		Contact ± 6kV
	Radiated immunity	EN 61000-4-3 20V/m		A
	Fast transient <sup>(6)</sup>	EN 61000-4-4 ±2kV		A
	Surge <sup>(6)</sup>	EN 61000-4-5 ±2kV		A
	Conducted immunity	EN 61000-4-6 10Vrms		A
PFMF	EN 61000-4-8 30A/m		A	

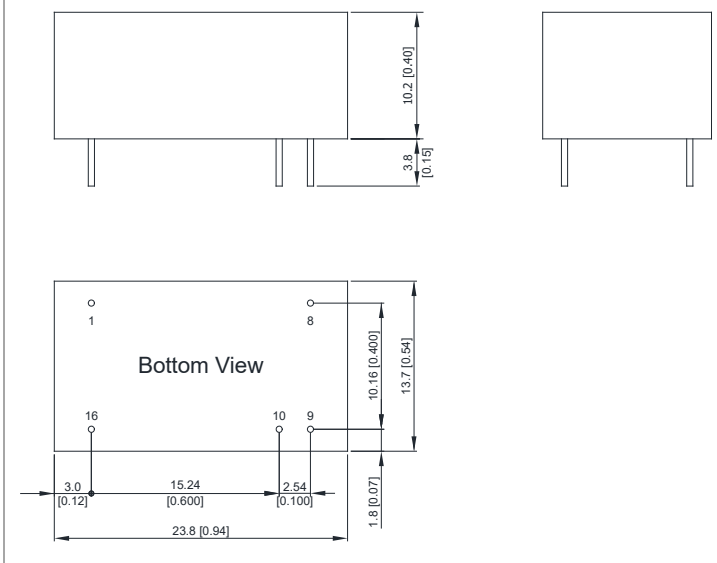
**Environmental Specifications**

Parameter	Model	Min.	Max.		Unit
			without Heatsink	with Heatsink	
Operating Temperature Range Nominal Vin, Load 100% Inom. (for Power Derating see relative Derating Curves)	MDWI15-24S051, MDWI15-48S051	-40	+50	+65	°C
	MDWI15-24S12, MDWI15-24S15, MDWI15-24S24 MDWI15-24D12, MDWI15-24D15, MDWI15-48S12 MDWI15-48S15, MDWI15-48S24, MDWI15-48D12 MDWI15-48D15		+55	+70	
Case Temperature		---	+110		°C
Storage Temperature Range		-50	+125		°C
Humidity (non condensing)		---	95		% rel. H
Lead Temperature (1.5mm from case for 10Sec.)		---	260		°C

**Power Derating Curve**

 MDWI15-24S051, MDWI15-48S051  
Derating Curve without Heatsink

 MDWI15-24S051, MDWI15-48S051  
Derating Curve with Heatsink

 MDWI15-24S12, MDWI15-24S15, MDWI15-24S24  
MDWI15-24D12, MDWI15-24D15, MDWI15-48S12  
MDWI15-48S15, MDWI15-48S24, MDWI15-48D12  
MDWI15-48D15  
Derating Curve without Heatsink

 MDWI15-24S12, MDWI15-24S15, MDWI15-24S24  
MDWI15-24D12, MDWI15-24D15, MDWI15-48S12  
MDWI15-48S15, MDWI15-48S24, MDWI15-48D12  
MDWI15-48D15  
Derating Curve with Heatsink

**Notes**

- Specifications typical at  $T_a = +25^\circ\text{C}$ , resistive load, nominal input voltage and rated output current unless otherwise noted.
- Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%.
- We recommend to protect the converter by a slow blow fuse in the input supply line.
- Other input and output voltage may be available, please contact MINMAX.
- To meet EN 55032 Class A with an external filter, please contact MINMAX.
- To meet EN61000-4-4 & EN61000-4-5 an external capacitor across the input pins is required, please contact MINMAX.
- Specifications are subject to change without notice.

**Package Specifications**
**Mechanical Dimensions**

**Pin Connections**

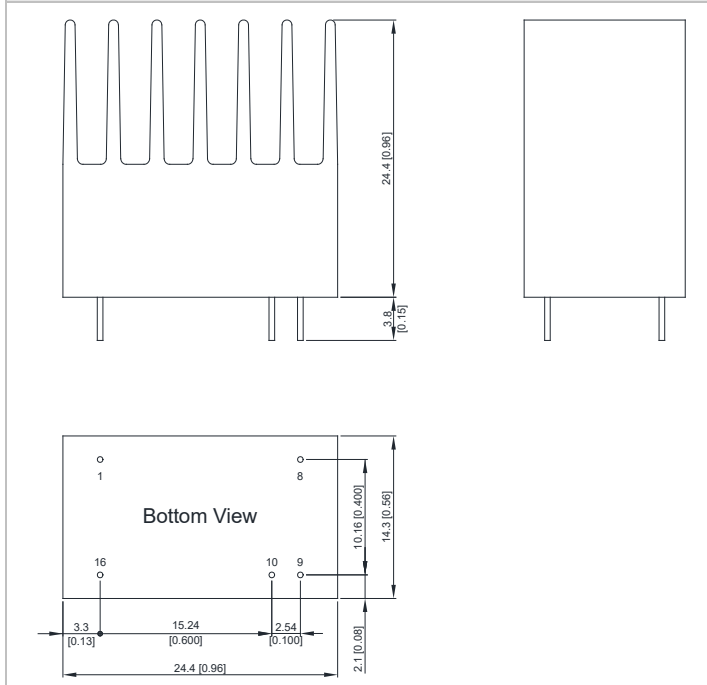
Pin	Single Output	Dual Output	Diameter mm (inches)
1	-Vin	-Vin	Ø 0.5 [0.02]
8	NC	Common	Ø 0.5 [0.02]
9	+Vout	+Vout	Ø 0.5 [0.02]
10	-Vout	-Vout	Ø 0.5 [0.02]
16	+Vin	+Vin	Ø 0.5 [0.02]

NC: No Connection

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.5 (X.XX±0.02)  
X.XX±0.25 (X.XXX±0.01)
- ▶ Pin diameter tolerance: X.X±0.05 (X.XX±0.002)

**Physical Characteristics**

Case Size	: 23.8x13.7x10.2 mm (0.94x0.54x0.40 inches)
Case Material	: Metal With Non-Conductive Baseplate
Pin Material	: Copper Alloy
Weight	: 8.77g

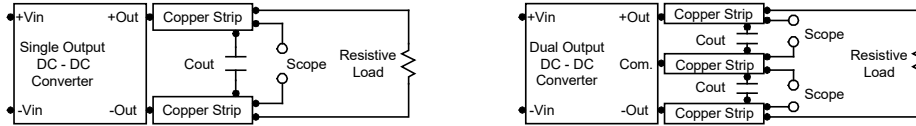
**Heatsink (Option -HC7)**

**Physical Characteristics**

Heatsink Material	: Aluminum
Finish	: Black Anodized Coating
Weight	: 14.2g

Order Code Table	
Standard	With heatsink
MDWI15-24S051	MDWI15-24S051-HC7
MDWI15-24S12	MDWI15-24S12-HC7
MDWI15-24S15	MDWI15-24S15-HC7
MDWI15-24S24	MDWI15-24S24-HC7
MDWI15-24D12	MDWI15-24D12-HC7
MDWI15-24D15	MDWI15-24D15-HC7
MDWI15-48S051	MDWI15-48S051-HC7
MDWI15-48S12	MDWI15-48S12-HC7
MDWI15-48S15	MDWI15-48S15-HC7
MDWI15-48S24	MDWI15-48S24-HC7
MDWI15-48D12	MDWI15-48D12-HC7
MDWI15-48D15	MDWI15-48D15-HC7

**Test Setup**
**Peak-to-Peak Output Noise Measurement Test**

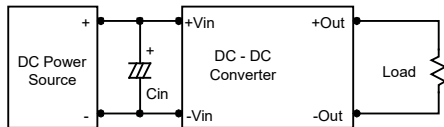
Refer to the output specifications or add 2.2 $\mu$ F capacitor if the output specifications undefine Cout. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC-DC Converter.


**Technical Notes**
**Overload Protection**

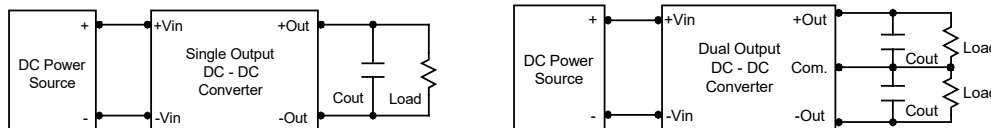
To provide hiccup mode protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure overload for an unlimited duration.

**Input Source Impedance**

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor on the input to insure startup. By using a good quality low Equivalent Series Resistance (ESR < 1.0 $\Omega$  at 100 kHz) capacitor of a 2.2 $\mu$ F for the 24V and a 27 $\mu$ F/200V/KXJ for the 48V input devices, capacitor mounted close to the power module helps ensure stability of the unit.


**Output Ripple Reduction**

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 2.2 $\mu$ F capacitors at the output.


**Maximum Capacitive Load**

The MDWI15 series has limitation of maximum connected capacitance on the output. The power module may operate in current limiting mode during start-up, affecting the ramp-up and the startup time. Connect capacitors at the point of load for best performance. The maximum capacitance can be found in the data sheet.

**Thermal Considerations**

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 110°C. The derating curves are determined from measurements obtained in a test setup.

