

**FEATURES**

- ▶ Industrial Standard DIP-24 Package
- ▶ Wide 2:1 Input Voltage Range
- ▶ Fully Regulated Output Voltage
- ▶ I/O Isolation 5000VAC with Reinforced Insulation, rated for 250Vrms Working Voltage
- ▶ Creepage & Clearance Distance meet 8mm
- ▶ Low I/O Leakage Current < 2μA
- ▶ Operating Ambient Temp. Range -40°C to 96°C
- ▶ No Min. Load Requirement
- ▶ Under-Voltage, Overload/Voltage and Short Circuit Protection
- ▶ Conducted EMI EN 55011 Class A Approved
- ▶ Medical EMC Standard with 4<sup>th</sup> Edition of EMI EN 55011 and EMS EN 60601-1-2 Approved
- ▶ Medical Safety with 2xMOPP per 3<sup>rd</sup> Edition of IEC/EN 60601-1 & ANSI/AAMI ES60601-1 Approved with CE Marking


**PRODUCT OVERVIEW**

The MINMAX MIW03M series is a new range of high performance 3.5W medical approved DC-DC converter within encapsulated DIP-24 package which specifically design for medical applications. There are 21 models available for input voltage of 5, 12, 24, 48VDC with wide 2:1 input range and fixed output voltage. The I/O isolation is specified for 5000VAC with reinforced insulation, which rated for 250Vrms working voltage. Further features include under-voltage, overload, over voltage, short circuit protection, no min. load requirement, conducted EMI EN 55011 class A approved, low I/O leakage current 2μA max. and operating ambient temp. range by -40°C to 96°C without derating by high efficiency up to 87%. MIW03M series conform to 4<sup>th</sup> edition medical EMC standard, medical safety with 2xMOPP (Means Of Patient Protection) per 3<sup>rd</sup> edition of IEC/EN 60601-1 & ANSI/AAMI ES 60601-1 approved and 8mm creepage and clearance. The MIW03M series offer the best solution for demanding applications in medical instrument requesting a certified supplementary and reinforced insulation system to comply with latest medical safety approval for 2xMOPP requirement.

**Model Selection Guide**

| Model Number  | Input Voltage (Range)<br>VDC | Output Voltage<br>VDC | Output Current<br>Max.<br>mA | Input Current          |                      | Over Voltage Protection<br>VDC | Max. capacitive Load<br>μF | Efficiency (typ.)<br>@Max. Load<br>% |
|---------------|------------------------------|-----------------------|------------------------------|------------------------|----------------------|--------------------------------|----------------------------|--------------------------------------|
|               |                              |                       |                              | @Max. Load<br>mA(typ.) | @No Load<br>mA(typ.) |                                |                            |                                      |
| MIW03-05S05M  | 5<br>(4.5 ~ 9)               | 5                     | 700                          | 843                    | 20                   | 6.2                            | 750                        | 83                                   |
| MIW03-05S058M |                              | 5.8                   | 600                          | 839                    |                      | 6.2                            | 560                        | 83                                   |
| MIW03-05S12M  |                              | 12                    | 290                          | 829                    |                      | 15                             | 130                        | 84                                   |
| MIW03-05S15M  |                              | 15                    | 235                          | 839                    | 18                   | 100                            | 84                         |                                      |
| MIW03-05D12M  |                              | ±12                   | ±145                         | 829                    | 35                   | ±15                            | 75#                        | 84                                   |
| MIW03-05D15M  |                              | ±15                   | ±115                         | 821                    |                      | ±18                            | 56#                        | 84                                   |
| MIW03-12S05M  | 12<br>(9 ~ 18)               | 5                     | 700                          | 351                    | 8                    | 6.2                            | 750                        | 83                                   |
| MIW03-12S12M  |                              | 12                    | 290                          | 333                    |                      | 15                             | 130                        | 87                                   |
| MIW03-12S15M  |                              | 15                    | 235                          | 338                    |                      | 18                             | 100                        | 87                                   |
| MIW03-12D12M  |                              | ±12                   | ±145                         | 333                    | 13                   | ±15                            | 75#                        | 87                                   |
| MIW03-12D15M  |                              | ±15                   | ±115                         | 330                    |                      | ±18                            | 56#                        | 87                                   |
| MIW03-24S05M  | 24<br>(18 ~ 36)              | 5                     | 700                          | 176                    | 6                    | 6.2                            | 750                        | 83                                   |
| MIW03-24S12M  |                              | 12                    | 290                          | 169                    |                      | 15                             | 130                        | 86                                   |
| MIW03-24S15M  |                              | 15                    | 235                          | 169                    |                      | 18                             | 100                        | 87                                   |
| MIW03-24D12M  |                              | ±12                   | ±145                         | 167                    |                      | ±15                            | 75#                        | 87                                   |
| MIW03-24D15M  |                              | ±15                   | ±115                         | 167                    |                      | ±18                            | 56#                        | 86                                   |
| MIW03-48S05M  | 48<br>(36 ~ 75)              | 5                     | 700                          | 88                     | 4                    | 6.2                            | 750                        | 83                                   |
| MIW03-48S12M  |                              | 12                    | 290                          | 84                     |                      | 15                             | 130                        | 86                                   |
| MIW03-48S15M  |                              | 15                    | 235                          | 86                     |                      | 18                             | 100                        | 85                                   |
| MIW03-48D12M  |                              | ±12                   | ±145                         | 86                     |                      | ±15                            | 75#                        | 84                                   |
| MIW03-48D15M  |                              | ±15                   | ±115                         | 86                     |                      | ±18                            | 56#                        | 84                                   |

# For each output

| Input Specifications              |   |                  |      |      |      |  |  |
|-----------------------------------|---|------------------|------|------|------|--|--|
| Parameter                         | Conditions / Model                      | Min.             | Typ. | Max. | Unit |  |  |
| Input Surge Voltage (1 sec. max.) | 5V Input Models                         | -0.7             | ---  | 15   | VDC  |  |  |
|                                   | 12V Input Models                        | -0.7             | ---  | 25   |      |  |  |
|                                   | 24V Input Models                        | -0.7             | ---  | 50   |      |  |  |
|                                   | 48V Input Models                        | -0.7             | ---  | 100  |      |  |  |
| Start-Up Threshold Voltage        | 5V Input Models                         | ---              | ---  | 4.5  |      |  |  |
|                                   | 12V Input Models                        | ---              | ---  | 9    |      |  |  |
|                                   | 24V Input Models                        | ---              | ---  | 18   |      |  |  |
|                                   | 48V Input Models                        | ---              | ---  | 36   |      |  |  |
| Under Voltage Shutdown            | 5V Input Models                         | ---              | 4    | ---  |      |  |  |
|                                   | 12V Input Models                        | ---              | 8    | ---  |      |  |  |
|                                   | 24V Input Models                        | ---              | 16   | ---  |      |  |  |
|                                   | 48V Input Models                        | ---              | 34   | ---  |      |  |  |
| Start Up Time (Power On)          | Nominal Vin and Constant Resistive Load | ---              | ---  | 30   | ms   |  |  |
| Input Filter                      | All Models                              | Internal Pi Type |      |      |      |  |  |

| Output Specifications               |   |                          |       |       |        |                   |  |
|-------------------------------------|---|--------------------------|-------|-------|--------|-------------------|--|
| Parameter                           | Conditions  | Min.                     | Typ.  | Max.  | Unit   |                   |  |
| Output Voltage Setting Accuracy     |   | ---                      | ---   | ±1.0  | %Vnom. |                   |  |
| Output Voltage Balance              | Dual Output, Balanced Loads                             | ---                      | ±0.5  | ±2.0  | %      |                   |  |
| Line Regulation                     | Vin=Min. to Max. @Full Load                             | ---                      | ---   | ±0.5  | %      |                   |  |
| Load Regulation                     | Io=0% to 100%   | ---                      | ---   | ±0.5  | %      |                   |  |
| Load Cross Regulation (Dual Output) | Asymmetrical Load 25%/100% Full Load                    | ---                      | ---   | ±5.0  | %      |                   |  |
| Minimum Load                        | No minimum Load Requirement                             |                          |       |       |        |                   |  |
| Ripple & Noise                      | 0-20 MHz Bandwidth                                      | Measured with a 1μF MLCC | ---   | ---   | 70     | mV <sub>P-P</sub> |  |
| Transient Recovery Time             | 25% Load Step Change                                    | ---                      | 300   | ---   | μsec   |                   |  |
| Transient Response Deviation        |   | ---                      | ±3    | ±5    | %      |                   |  |
| Temperature Coefficient             |   | ---                      | ±0.01 | ±0.02 | %/°C   |                   |  |
| Over Load Protection                |   | ---                      | 150   | ---   | %      |                   |  |
| Short Circuit Protection            | Continuous, Automatic Recovery (Hiccup Mode 0.5Hz typ.) |                          |       |       |        |                   |  |

| Isolation, Safety Standards |   |      |      |      |      |  |  |
|-----------------------------|---|------|------|------|------|--|--|
| Parameter                   | Conditions  | Min. | Typ. | Max. | Unit |  |  |
| I/O Isolation Voltage       | 60 Seconds<br>Reinforced insulation, rated for 250Vrms working voltage                                    | 5000 | ---  | ---  | VAC  |  |  |
| Leakage Current             | 240VAC, 60Hz  | ---  | ---  | 2    | μA   |  |  |
| I/O Isolation Resistance    | 500 VDC   | 10   | ---  | ---  | GΩ   |  |  |
| I/O Isolation Capacitance   | 100kHz, 1V  | ---  | ---  | 40   | pF   |  |  |
| Safety Standards            | ANSI/AAMI ES60601-1, CAN/CSA-C22.2 No. 60601-1<br>IEC/EN 60601-1 3 <sup>rd</sup> Edition 2xMOPP           |      |      |      |      |  |  |
| Safety Approvals            | ANSI/AAMI ES60601-1 2xMOPP recognition(UL certificate), IEC/EN 60601-1 3 <sup>rd</sup> Edition(CB-report) |      |      |      |      |  |  |


| General Specifications |                                   |           |      |      |       |  |
|------------------------|-----------------------------------|-----------|------|------|-------|--|
| Parameter              | Conditions                        | Min.      | Typ. | Max. | Unit  |  |
| Switching Frequency    |                                   | ---       | 330  | ---  | kHz   |  |
| MTBF(calculated)       | MIL-HDBK-217F@25°C, Ground Benign | 5,815,448 | ---  | ---  | Hours |  |

**EMC Specifications**

| Parameter | Standards & Level             |                         |                              | Performance            |
|-----------|-------------------------------|-------------------------|------------------------------|------------------------|
| EMI       | Conduction                    | EN 55011                | Without external components  | Class A <sup>(5)</sup> |
|           | Radiation                     |                         | With external components     |                        |
| EMS       | EN 60601-1-2 4 <sup>th</sup>  |                         |                              |                        |
|           | ESD                           | Direct discharge        | Indirect discharge HCP & VCP |                        |
|           |                               | EN 61000-4-2 Air ± 15kV | Contact ± 8kV                |                        |
|           | Radiated immunity             | EN 61000-4-3 10V/m      |                              | A                      |
|           | Fast transient <sup>(6)</sup> | EN 61000-4-4 ±2kV       |                              | A                      |
|           | Surge <sup>(6)</sup>          | EN 61000-4-5 ±2kV       |                              | A                      |
|           | Conducted immunity            | EN 61000-4-6 10Vrms     |                              | A                      |
| PFMF      | EN 61000-4-8 100A/m           |                         | A                            |                        |

**Environmental Specifications**


| Parameter  | Min. | Max. | Unit     |
|--|------|------|----------|
| Operating Ambient Temperature Range (See Power Derating Curve) | -40  | +96  | °C       |
| Case Temperature   | ---  | +105 | °C       |
| Storage Temperature Range                                      | -50  | +125 | °C       |
| Humidity (non condensing)                                      | ---  | 95   | % rel. H |
| Lead Temperature (1.5mm from case for 10Sec.)                  | ---  | 260  | °C       |

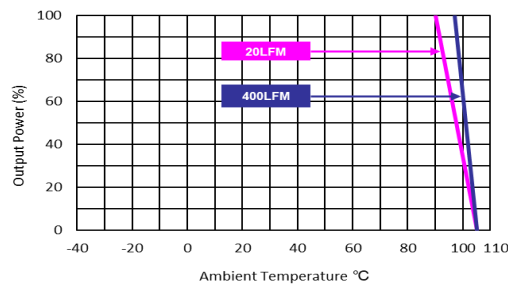**Power Derating Curve**

**Notes**

- Specifications typical at Ta=+25°C, resistive load, nominal input voltage and rated output current unless otherwise noted.
- Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%.
- We recommend to protect the converter by a slow blow fuse in the input supply line.
- Other input and output voltage may be available, please contact MINMAX.
- To meet EN 55011 Class A with an external filter, please contact MINMAX.
- To meet EN 61000-4-4 & EN 61000-4-5 an external capacitor across the input pins is required, please contact MINMAX.
- Specifications are subject to change without notice.

**Package Specifications**
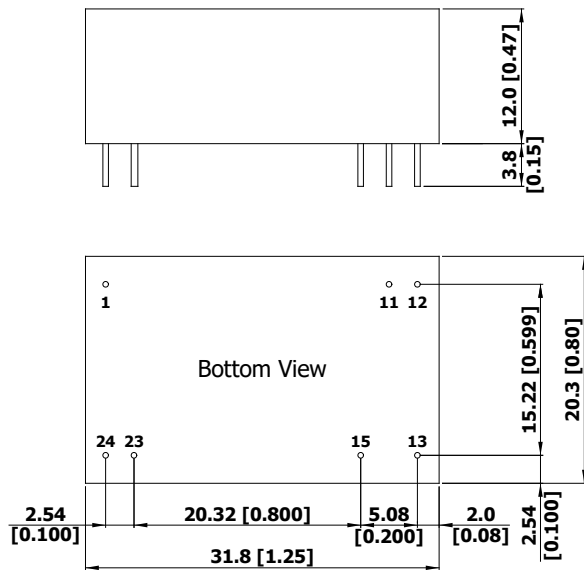
## Mechanical Dimensions



## Pin Connections

| Pin | Single Output | Dual Output | Diameter mm (inches) |
|-----|---------------|-------------|----------------------|
| 1   | +Vin          | +Vin        | Ø 0.6 [0.02]         |
| 11  | No Pin        | Common      | Ø 0.6 [0.02]         |
| 12  | -Vout         | No Pin      | Ø 0.6 [0.02]         |
| 13  | +Vout         | -Vout       | Ø 0.6 [0.02]         |
| 15  | No Pin        | +Vout       | Ø 0.6 [0.02]         |
| 23  | -Vin          | -Vin        | Ø 0.6 [0.02]         |
| 24  | -Vin          | -Vin        | Ø 0.6 [0.02]         |

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.5 (X.XX±0.02)  
X.XX±0.25 (X.XXX±0.01)
- ▶ Pin diameter tolerance: X.X±0.05 (X.XX±0.002)


**Physical Characteristics**

|               |  |
|---------------|--|
| Case Size     | : 31.8x20.3x12.0mm (1.25x0.80x0.47 inches)       |
| Case Material | : Plastic resin (flammability to UL 94V-0 rated) |
| Pin Material  | : Copper Alloy                                   |
| Weight        | : 15.5g  |

### Test Setup

#### Peak-to-Peak Output Noise Measurement Test

Refer to the output specifications or add 4.7 $\mu$ F capacitor if the output specifications undefine C<sub>out</sub>. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC-DC Converter.

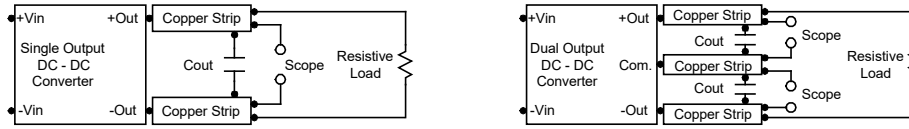

### Technical Notes

#### Overload Protection


To provide hiccup mode protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure overload for an unlimited duration.

#### Overvoltage Protection

The output overvoltage clamp consists of control circuitry, which is independent of the primary regulation loop, that monitors the voltage on the output terminals. The control loop of the clamp has a higher voltage set point than the primary loop. This provides a redundant voltage control that reduces the risk of output overvoltage. The OVP level can be found in the output data.


#### Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor on the input to insure startup. By using a good quality low Equivalent Series Resistance (ESR < 1.0 $\Omega$  at 100 kHz) capacitor of a 22 $\mu$ F for the 5V input devices and a 10 $\mu$ F for the 12V input devices and a 4.7 $\mu$ F for the 24V input devices and a 2.2 $\mu$ F for the 48V devices, capacitor mounted close to the power module helps ensure stability of the unit.

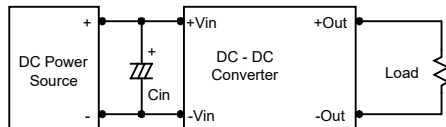

#### Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 1 $\mu$ F capacitors at the output.

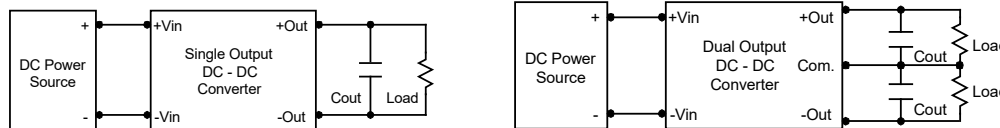

#### Maximum Capacitive Load

The MIW03M series has limitation of maximum connected capacitance on the output. The power module may operate in current limiting mode during start-up, affecting the ramp-up and the startup time. Connect capacitors at the point of load for best performance. The maximum capacitance can be found in the data sheet.

#### Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 105°C. The derating curves are determined from measurements obtained in a test setup.

