

FEATURES

- ▶ Industrial Standard Quarter Brick Package
- ▶ Ultra-wide Input Range 36-160VDC
- ▶ I/O Isolation 2000VAC with Reinforced Insulation
- ▶ Excellent Efficiency up to 91.5%
- ▶ Operating Baseplate Temp. Range -40°C to +105°C
- ▶ No Min. Load Requirement
- ▶ Under-voltage, Overload/Voltage/Temp. and Short Circuit Protection
- ▶ Remote On/Off Control, Output Voltage Trim, Output Sense
- ▶ Vibration and Shock/Bump Test EN 61373 Approved
- ▶ Cooling, Dry & Damp Heat Test IEC/EN 60068-2-1, 2, 30 Approved
- ▶ Railway EMC Standard EN 50121-3-2 Approved
- ▶ Railway Certified EN 50155 (IEC60571) Approved
- ▶ Fire Protection Test EN 45545-2 Approved
- ▶ UL/cUL/IEC/EN 62368-1 Safety Approval & CE Marking

NEW


PRODUCT OVERVIEW

MRZI100 series from MINMAX DC-DC converter manufacturer is ideal for railway applications. Its input voltage range is designed at 36-160 VDC, which is suitable for applications that require low voltage startup. The packing style of MRZI100 100W DC-DC converter is an international 1/4 brick type package. To avoid the damage of lightning strikes, MRZI100 series 100W DC-DC converter has a 2000VAC isolation withstand voltage and a reinforced insulation system. In addition, MRZI100 series passed up to 500 times of cold and heat cycle tests to ensure thermal performance and reliability for long-time use, making the temperature reach 105°C but still operating smoothly based on heat dissipation management structure design.

MRZI100 100W DC-DC converter is able to meet 100% current and power requirements of the back-end load system, offering the rated output voltage. Because of its outstanding circuit topology, the efficiency of MRZI100 is up to 91.5%. Even at the moment of the startup, it can still keep high stability of overall efficiency, power loss, and heat generation. Besides, it also passed the Railway Code Certification EN 50155 (IEC 60571), Fire Test Code Certification EN 45545-2, and Safety Code Certification IEC/EN/UL 62368-1.

To provide more flexible design requirements, MRZI100 100W DC-DC converter owns output voltage sensing functions as well as positive/negative logic remote control switches. Also, it is equipped with abnormality protective functions like output short-circuit protection, input under-voltage protection, over-temperature protection, etc. to make sure that the power module and the back-end system can get immediate protection when an abnormal operation. If you need more details about our 100W DC-DC converters, welcome to contact MINMAX railway power converters supplier to help you!

Model Selection Guide

Model Number	Input Voltage (Range) (9)	Output Voltage	Output Power	Output Current	Input Current		Over Voltage Protection	Max. capacitive Load	Efficiency (typ.)
					@Max. Load	@No Load			@Max. Load
		VDC	W	Max. A	mA(typ.)	mA(typ.)		μF	%
MRZI100-110S05	110 (36 ~ 160)	5	100	20	993.5	6	6.2	34000	91.5
MRZI100-110S12		12	100.8	8.4	1007	6	15	5830	91
MRZI100-110S15		15	100.5	6.7	1009	6	18	3670	90.5
MRZI100-110S24		24	100.8	4.2	1029	6	30	1460	89
MRZI100-110S54		54	99.9	1.85	1020	6	66	380	89

Input Specifications

Parameter	Min.	Typ.	Max.	Unit
Input Voltage Range ⁽⁹⁾	36	110	160	VDC
Input Surge Voltage (100ms. max)	-0.7	---	170	
Start-up Threshold Voltage	---	---	36	
Under Voltage Shutdown	---	35	---	
Input Filter	Internal Capacitor			

Output Specifications

Parameter	Conditions		Min.	Typ.	Max.	Unit	
Output Voltage Setting Accuracy			---	---	±1.0	%	
Line Regulation	Vin=Min. to Max. @ Full Load		---	---	±0.2	%	
Load Regulation	Min. Load to Full Load		---	---	±0.3	%	
Min. Load	No minimum Load Requirement						
Ripple & Noise	0-20 MHz Bandwidth	5V Output	Measured with a	---	100	---	mV _{P-P}
		12V, 15V Output	22μF/25V POLYMER	---	150	---	mV _{P-P}
		24V Output	Measured with a	---	200	---	mV _{P-P}
		54V Output	Measured with a	---	300	---	mV _{P-P}
		1μF/100V MLCC					
Start Up Time (Power On)			---	50	---	ms	
Transient Recovery Time	25% Load Step Change ⁽²⁾		---	250	---	μs	
Transient Response Deviation			---	±3	±5	%	
Temperature Coefficient			---	---	±0.02	%/°C	
Trim Up / Down Range ⁽⁸⁾	% of Nominal Output Voltage	Other Models	---	---	±10	%	
		54V Output	---	---	+5 / -15	%	
Over Load Protection ⁽⁷⁾	Current Limitation at 150% typ. of Iout max., Hiccup						
Short Circuit Protection	Continuous, Automatic Recovery (Hiccup Mode 0.3Hz typ.)						

General Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	Reinforced Insulation, Rated For 60 Seconds	2000	---	---	VAC
Isolation Voltage	Input to case	1500	---	---	VAC
	Output to case	500	---	---	VAC
I/O Isolation Resistance	500 VDC	10	---	---	GΩ
I/O Isolation Capacitance	100kHz, 1V	---	1500	---	pF
Switching Frequency	Other Models	---	214	---	kHz
	54V Output	---	173	---	kHz
MTBF(calculated)	MIL-HDBK-217F@25°C Full Load, Ground Benign	605,102	---	---	Hours
Safety Standards	EN 50155, IEC 60571				
	UL/cUL 62368-1 recognition(UL certificate), IEC/EN 62368-1				

Remote On/Off Control

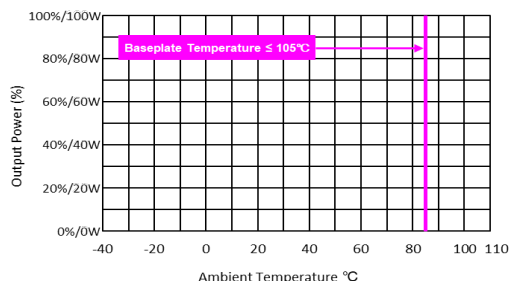
Parameter		Conditions	Min.	Typ.	Max.	Unit	
Positive logic (Standard)		Converter On	3.5V ~ 12V or Open Circuit				
		Converter Off	0V ~ 1.2V or Short Circuit				
Negative logic (Option)		Converter On	0V ~ 1.2V or Short Circuit				
		Converter Off	3.5V ~ 12V or Open Circuit				
Positive logic	Control Input Current	Converter On	Vctrl = 5.0V	---	---	0.5	mA
		Converter Off	Vctrl = 0V	---	---	-0.5	mA
Negative logic	Control Input Current	Converter On	Vctrl = 0V	---	---	-0.5	mA
		Converter Off	Vctrl = 5.0V	---	---	0.5	mA
Control Common		Referenced to Negative Input					
Standby Input Current		Nominal Vin	---	3	---	mA	

EMC Specifications

Parameter		Standards & Level		Performance
General		Compliance with EN 50121-3-2 Railway Applications		
EMI (5)	Conduction	EN 55032/11	With external components	Class A
	Radiation			
EMS (5)	EN 55024, EN 55035			
	ESD	Direct discharge	Indirect discharge HCP & VCP	A
		EN 61000-4-2 air ± 8kV, Contact ± 6kV Contact ± 6kV		
	Radiated immunity	EN 61000-4-3 10V/m		A
	Fast transient	EN 61000-4-4 ±2kV		A
	Surge	EN 61000-4-5 ±1kV		A
	Conducted immunity	EN 61000-4-6 10Vrms		A
	PFMF	EN 61000-4-8 3A/M		A

Environmental Specifications

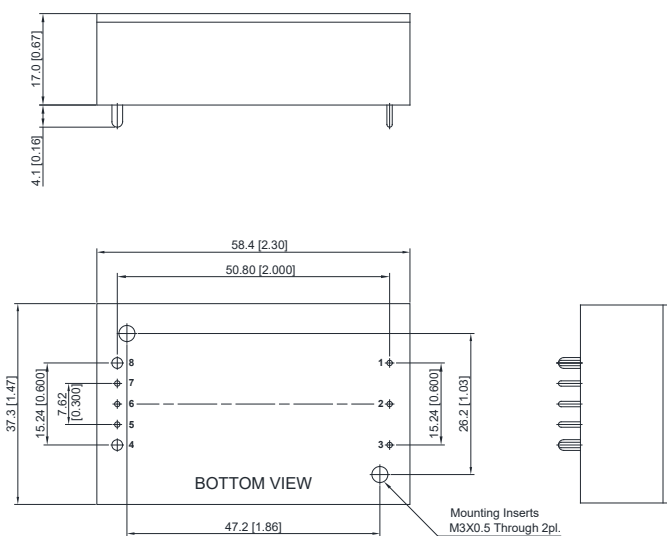
Parameter	Conditions	Min.	Typ.	Max.	Unit
Baseplate Temperature Range		-40	---	+105	°C
Over Temperature Protection (Baseplate)		---	+110	---	°C
Storage Temperature Range		-50	---	+125	°C
Cooling Test	Compliance to IEC/EN60068-2-1				
Dry Heat	Compliance to IEC/EN60068-2-2				
Damp Heat	Compliance to IEC/EN60068-2-30				
Vibration and Shock/Bump	Compliance to IEC/EN 61373				
Operating Humidity (non condensing)		5		95	% rel. H
Lead Temperature (1.5mm from case for 10Sec.)		---		260	°C

Power Derating Curve


* The power module can deliver full rated power as long as users keep operating baseplate temperature below 105°C within defined ambient temperature range.

Notes

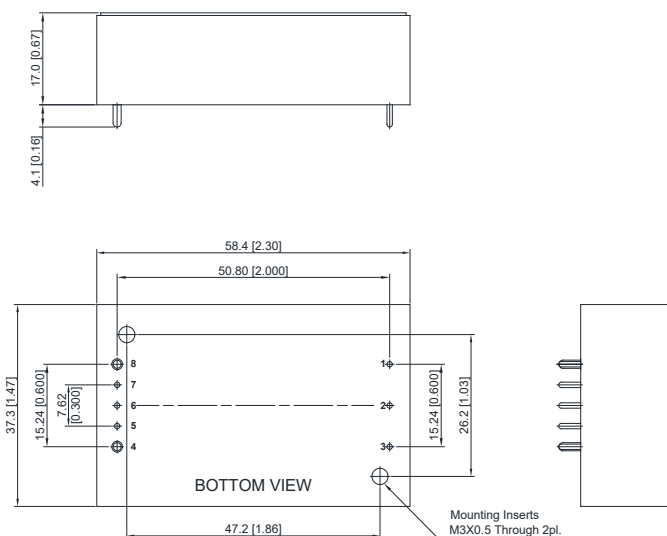
- 1 Specifications typical at Ta=+25°C, resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%.
- 3 Other input and output voltage may be available, please contact MINMAX.
- 4 **It is necessary to parallel a capacitor across the input pins under normal operation. Minimum Capacitance: 150μF/ 250V KXJ.**
- 5 The external components might be required to meet EMI/EMS standard for some of test items. Please contact MINMAX for the solution in detail.
- 6 **The hot-swap operation is extremely prohibited.**
- 7 Over Current Protection (OCP) is built in and works over 130% of the rated current or higher. However, use in an over current situation over 4 seconds must be avoided whenever possible.
- 8 Do not exceed maximum power specification when adjusting output voltage. Please see the External Output Trimming table at page 9.
- 9 ***Input Voltage Vin= 36VDC/1s for Start-up Operation and Vin= 40VDC for Continuous Operation**
- 10 Specifications are subject to change without notice.
- 11 The repeated high voltage isolation testing of the converter can degrade isolation capability, to a lesser or greater degree depending on materials, construction, environment and reflow solder process. Any material is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage. Furthermore, the high voltage isolation capability after reflow solder process should be evaluated as it is applied on system.

Package specifications ($\pm V_{out}$ pin $\varnothing 2.0\text{mm}$)
Mechanical Dimensions

Pin Connections

Pin	Function	Diameter mm (inches)
1	+Vin	$\varnothing 1.0$ [0.04]
2	Remote On/Off	$\varnothing 1.0$ [0.04]
3	-Vin	$\varnothing 1.0$ [0.04]
4	-Vout	$\varnothing 2.0$ [0.08]
5	* -Sense	$\varnothing 1.0$ [0.04]
6	Trim	$\varnothing 1.0$ [0.04]
7	* +Sense	$\varnothing 1.0$ [0.04]
8	+Vout	$\varnothing 2.0$ [0.08]

* If remote sense not used the +sense should be connected to +output and -sense should be connected to -output
Maximum output deviation is 10% inclusive of trim

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: $X.X \pm 0.5$ ($X.XX \pm 0.02$)
 $X.XX \pm 0.25$ ($X.XXX \pm 0.01$)
- ▶ Pin diameter tolerance: $X.X \pm 0.05$ ($X.XX \pm 0.002$)

Package specifications ($\pm V_{out}$ pin $\varnothing 1.5\text{mm}$, order code suffix D)
Mechanical Dimensions

Pin Connections

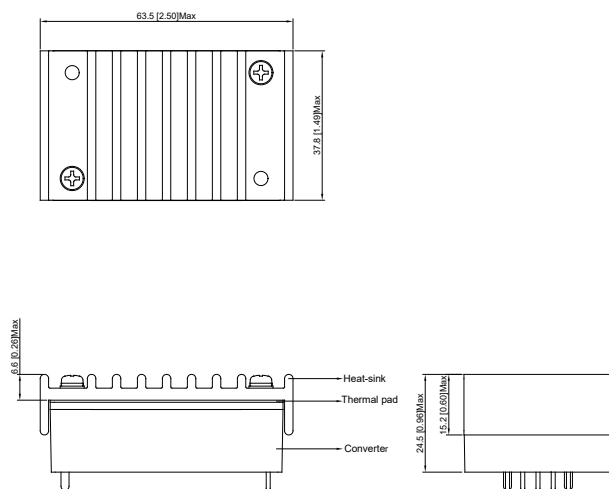
Pin	Function	Diameter mm (inches)
1	+Vin	$\varnothing 1.0$ [0.04]
2	Remote On/Off	$\varnothing 1.0$ [0.04]
3	-Vin	$\varnothing 1.0$ [0.04]
4	-Vout	$\varnothing 1.5$ [0.06]
5	* -Sense	$\varnothing 1.0$ [0.04]
6	Trim	$\varnothing 1.0$ [0.04]
7	* +Sense	$\varnothing 1.0$ [0.04]
8	+Vout	$\varnothing 1.5$ [0.06]

* If remote sense not used the +sense should be connected to +output and -sense should be connected to -output
Maximum output deviation is 10% inclusive of trim

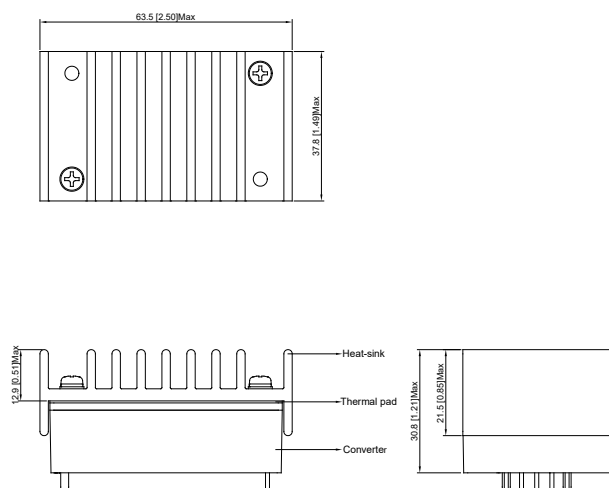
- ▶ All dimensions in mm (inches)
- ▶ Tolerance: $X.X \pm 0.5$ ($X.XX \pm 0.02$)
 $X.XX \pm 0.25$ ($X.XXX \pm 0.01$)
- ▶ Pin diameter tolerance: $X.X \pm 0.05$ ($X.XX \pm 0.002$)

Physical Characteristics

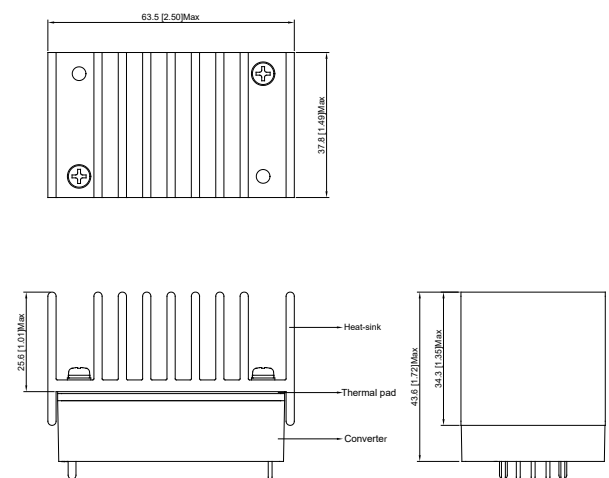
Case Size	: 58.4x37.3x17.0 mm (2.30x1.47x0.67 inches)
Case Material	: Plastic resin (flammability to UL 94V-0 rated)
Top Side Base Material	: Aluminum Plate
Pin Material	: Copper
Potting Material	: Silicone (UL94-V0)
Weight	: 107g

Heatsink ($\pm V_{out}$ pin $\varnothing 2.0\text{mm}$, Option –HS5)

Physical Characteristics

Heatsink Material	: Aluminum
Finish	: Black Anodized Coating
Weight	: 27g

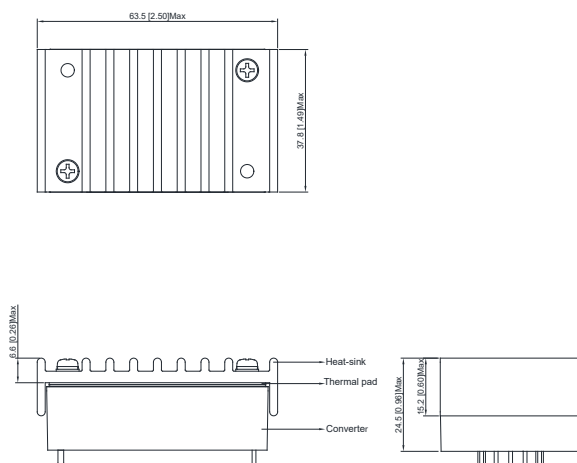
Heatsink ($\pm V_{out}$ pin $\varnothing 2.0\text{mm}$, Option –HS6)

Physical Characteristics

Heatsink Material	: Aluminum
Finish	: Black Anodized Coating
Weight	: 38g

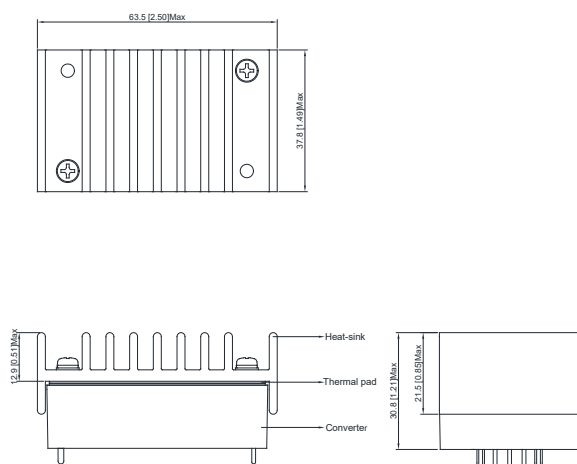
Heatsink ($\pm V_{out}$ pin $\varnothing 2.0\text{mm}$, Option –HS7)

Physical Characteristics

Heatsink Material	: Aluminum
Finish	: Black Anodized Coating
Weight	: 63g

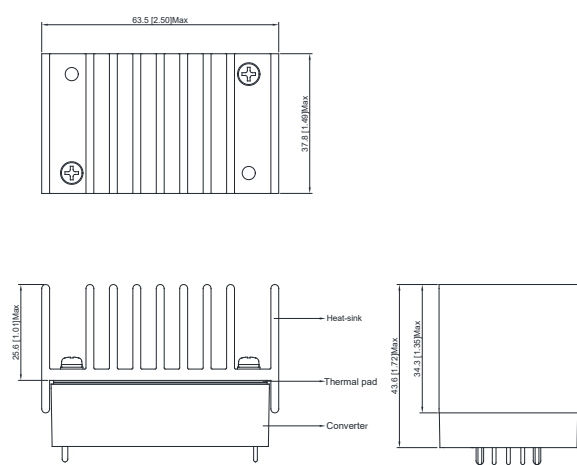
*For more power derating information, please refer to E.C Note.

Heatsink ($\pm V_{out}$ pin $\varnothing 1.5\text{mm}$, Option –HS5)

Physical Characteristics

Heatsink Material	: Aluminum
Finish	: Black Anodized Coating
Weight	: 27g

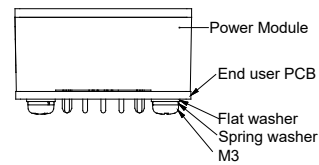
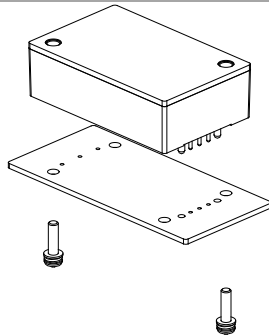
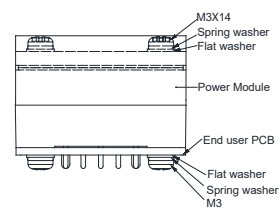
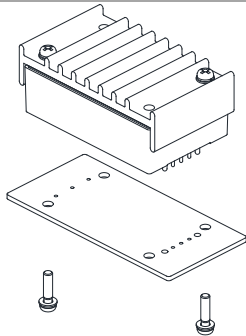
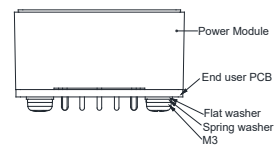
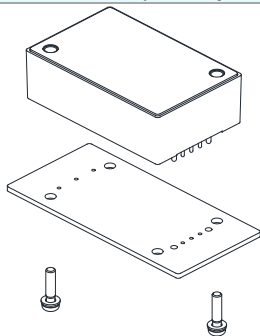
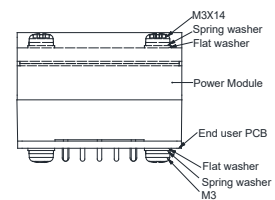
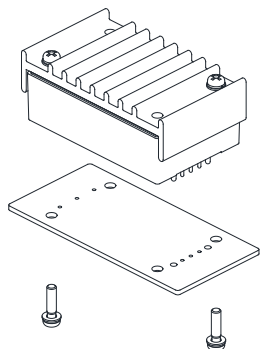
Heatsink ($\pm V_{out}$ pin $\varnothing 1.5\text{mm}$, Option –HS6)

Physical Characteristics

Heatsink Material	: Aluminum
Finish	: Black Anodized Coating
Weight	: 38g

Heatsink ($\pm V_{out}$ pin $\varnothing 1.5\text{mm}$, Option –HS7)

Physical Characteristics

Heatsink Material	: Aluminum
Finish	: Black Anodized Coating
Weight	: 63g

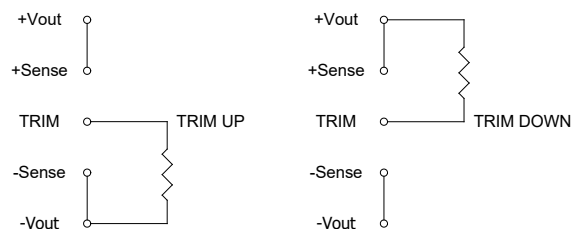
*For more power derating information, please refer to E.C Note.

PCB Installation of End Users ($\pm V_{out}$ pin $\varnothing 2.0\text{mm}$)

Heatsink Kit

PCB Installation of End Users ($\pm V_{out}$ pin $\varnothing 1.5\text{mm}$)

Heatsink Kit


1. Please evaluate mechanical stress (vibration, shock, bump) during field applications.
2. It has to equip with installation kit if excess the guaranteed specifications, please contacts MINMAX for detail information.
3. Applied torque per screw 9 kgf.cm min.

External Output Trimming

Output can be externally trimmed by using the method shown below



	MRZI100-110S05		MRZI100-110S12		MRZI100-110S15		MRZI100-110S24		MRZI100-110S54	
Trim Range (%)	Trim down (kΩ)	Trim up (kΩ)	Trim down (kΩ)	Trim up (kΩ)	Trim down (kΩ)	Trim up (kΩ)	Trim down (kΩ)	Trim up (kΩ)	Trim down (kΩ)	Trim up (kΩ)
1	138.88	106.87	413.55	351.00	530.73	422.77	598.66	487.14	1,882.57	560.73
2	62.41	47.76	184.55	157.50	238.61	189.89	267.78	218.02	877.94	230.36
3	36.92	28.06	108.22	93.00	141.24	112.26	157.49	128.31	543.06	120.24
4	24.18	18.21	70.05	60.75	92.56	73.44	102.34	83.46	375.62	65.18
5	16.53	12.30	47.15	41.40	63.35	50.15	69.25	56.55	275.15	32.15
6	11.44	8.36	31.88	28.50	43.87	34.63	47.19	38.61	208.18	---
7	7.79	5.55	20.98	19.29	29.96	23.54	31.44	25.79	160.34	---
8	5.06	3.44	12.80	12.37	19.53	15.22	19.62	16.18	124.46	---
9	2.94	1.79	6.44	7.00	11.41	8.75	10.43	8.70	96.55	---
10	1.24	0.48	1.35	2.70	4.92	3.58	3.08	2.72	74.23	---
11	---	---	---	---	---	---	---	---	55.96	---
12	---	---	---	---	---	---	---	---	40.74	---
13	---	---	---	---	---	---	---	---	27.86	---
14	---	---	---	---	---	---	---	---	16.82	---
15	---	---	---	---	---	---	---	---	7.25	---

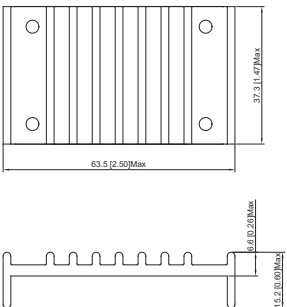
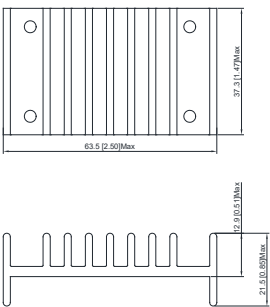
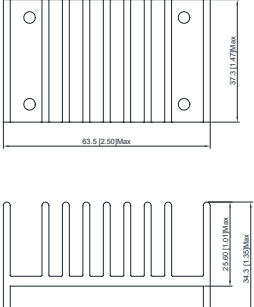
Order Code Table ($\pm V_{out}$ pin $\varnothing 2.0\text{mm}$)

Standard (Positive logic)	With heatsink (Positive logic)		
	MRZI100 + HS-QB002	MRZI100 + HS-QB003	MRZI100 + HS-QB004
MRZI100-110S05	MRZI100-110S05-HS5	MRZI100-110S05-HS6	MRZI100-110S05-HS7
MRZI100-110S12	MRZI100-110S12-HS5	MRZI100-110S12-HS6	MRZI100-110S12-HS7
MRZI100-110S15	MRZI100-110S15-HS5	MRZI100-110S15-HS6	MRZI100-110S15-HS7
MRZI100-110S24	MRZI100-110S24-HS5	MRZI100-110S24-HS6	MRZI100-110S24-HS7
MRZI100-110S54	MRZI100-110S54-HS5	MRZI100-110S54-HS6	MRZI100-110S54-HS7
Negative logic	With heatsink (Negative logic)		
	MRZI100 + HS-QB002	MRZI100 + HS-QB003	MRZI100 + HS-QB004
MRZI100-110S05N	MRZI100-110S05N-HS5	MRZI100-110S05N-HS6	MRZI100-110S05N-HS7
MRZI100-110S12N	MRZI100-110S12N-HS5	MRZI100-110S12N-HS6	MRZI100-110S12N-HS7
MRZI100-110S15N	MRZI100-110S15N-HS5	MRZI100-110S15N-HS6	MRZI100-110S15N-HS7
MRZI100-110S24N	MRZI100-110S24N-HS5	MRZI100-110S24N-HS6	MRZI100-110S24N-HS7
MRZI100-110S54N	MRZI100-110S54N-HS5	MRZI100-110S54N-HS6	MRZI100-110S54N-HS7

Order Code Table ($\pm V_{out}$ pin $\varnothing 1.5\text{mm}$)

With "D" Pinning (Positive logic)	With heatsink & "D" Pinning (Positive logic)		
	MRZI100 + D + HS-QB002	MRZI100 + D + HS-QB003	MRZI100 + D + HS-QB004
MRZI100-110S05D	MRZI100-110S05D-HS5	MRZI100-110S05D-HS6	MRZI100-110S05D-HS7
MRZI100-110S12D	MRZI100-110S12D-HS5	MRZI100-110S12D-HS6	MRZI100-110S12D-HS7
MRZI100-110S15D	MRZI100-110S15D-HS5	MRZI100-110S15D-HS6	MRZI100-110S15D-HS7
MRZI100-110S24D	MRZI100-110S24D-HS5	MRZI100-110S24D-HS6	MRZI100-110S24D-HS7
MRZI100-110S54D	MRZI100-110S54D-HS5	MRZI100-110S54D-HS6	MRZI100-110S54D-HS7
With "D" Pinning (Negative logic)	With heatsink & "D" Pinning (Negative logic)		
	MRZI100 + D + HS-QB002	MRZI100 + D + HS-QB003	MRZI100 + D + HS-QB004
MRZI100-110S05ND	MRZI100-110S05ND-HS5	MRZI100-110S05ND-HS6	MRZI100-110S05ND-HS7
MRZI100-110S12ND	MRZI100-110S12ND-HS5	MRZI100-110S12ND-HS6	MRZI100-110S12ND-HS7
MRZI100-110S15ND	MRZI100-110S15ND-HS5	MRZI100-110S15ND-HS6	MRZI100-110S15ND-HS7
MRZI100-110S24ND	MRZI100-110S24ND-HS5	MRZI100-110S24ND-HS6	MRZI100-110S24ND-HS7
MRZI100-110S54ND	MRZI100-110S54ND-HS5	MRZI100-110S54ND-HS6	MRZI100-110S54ND-HS7

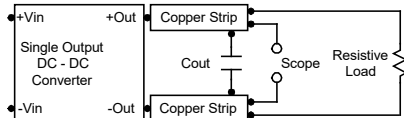
Order Code Table For Heatsink kit (including: Heatsink x1, Screw (M3/14mm) x 2, Thermal Pad x1)

HS-QB002	HS-QB003	HS-QB004
		

Test Setup

Peak-to-Peak Output Noise Measurement Test

Use a 22 μ F polymer capacitor for 5V, 12V, 15V output models and a 33 μ F polymer capacitor for 24V output model and a 1 μ F ceramic capacitor for 54V output model. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC-DC Converter.



Technical Notes

Remote On/Off

Positive logic remote on/off turns the module on during a logic high voltage on the remote on/off pin, and off during a logic low. To turn the power module on and off, the user must supply a switch to control the voltage between the on/off terminal and the -Vin terminal. The switch can be an open collector or equivalent. A logic low is 0V to 1.2V. A logic high is 3.5V to 12V. The maximum sink current at the on/off terminal (Pin 2) during a logic low is -500 μ A.

Negative logic remote on/off turns the module on during a logic low voltage on the remote on/off pin, and off during a logic high. To turn the power module on and off, the user must supply a switch to control the voltage between the on/off terminal and the -Vin terminal. The switch can be an open collector or equivalent. A logic low is 0V to 1.2V. A logic high is 3.5V to 12V. The maximum source current at the on/off terminal (Pin 2) during a logic high is 500 μ A.

Overload Protection

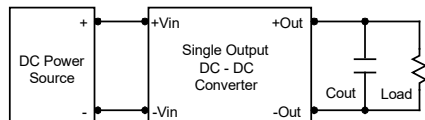
To provide hiccup mode protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure overload for an unlimited duration.

Overvoltage Protection

The output overvoltage clamp consists of control circuitry, which is independent of the primary regulation loop, that monitors the voltage on the output terminals. The control loop of the clamp has a higher voltage set point than the primary loop. This provides a redundant voltage control that reduces the risk of output overvoltage. The OVP level can be found in the output data.

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 4.7 μ F capacitors at the output.



Maximum Capacitive Load

The MRZI100 series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the data sheet.

Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the baseplate temperature must be kept below 105°C. The derating curves are determined from measurements obtained in a test setup.

