MINMAX®

MSCU01M Series
Electric Characteristic Note

MSCU01M Series EC Note

DC-DC CONVERTER 1W, Reinforced Insulation, Medical Safety

Features

- **Industrial Standard SMD Package**
- **Encapsulated 1W Converter**
- **Unregulated Output Voltage**
- **I/O Isolation 4000VAC with Reinforced Insulation, rated for 250Vrms Working Voltage**
- **Low I/O Leakage Current < 2μA**
- **Wide Operating Ambient Temp. Range**
- **Cleaning-washable Process Available (option)**
- **Qualified for Lead-free Reflow Solder Process According to IPC/JEDEC J-STD-020D.1**
- **Tape & Reel Package Available**
- **Short Circuit Protection**
- **Medical EMC Standard with 4th Edition of EMI EN 55011 and EMS EN 60601-1-2 Approved**
- **Medical Safety with 2xMOPP per 3.2 Edition of IEC/EN 60601-1 & ANSI/AAMI ES60601-1 Approved with CE Marking**
- **Risk Management Report Acquisition according to ISO 14971**

Applications

- Distributed power architectures
- Workstations
- Computer equipment
- Communications equipment

Product Overview

The MINMAX MSCU01M Series is an encapsulated 1 W medical-grade DC-DC converter in a compact SMD package, designed for high safety, low leakage, and fully automated SMT assembly. Featuring 4000 VAC I/O isolation with reinforced insulation rated for 250 Vrms working voltage and ultra-low I/O leakage current (<2μA), it provides robust patient protection and reliable electrical separation for medical and healthcare systems.
Engineered for modern manufacturing, the MSCU01M Series supports lead-free reflow soldering (IPC/JEDEC J-STD-020D.1), offers a cleaning-washable option, and is available in tape-and-reel packaging for high-volume production. With short-circuit protection, a wide operating ambient temperature range, full compliance with Medical EMC 4th Edition (EN 55011, EN 60601-1-2), and 2xMOPP certification to IEC/EN/ANSI/AAMI ES60601-1 (3.2 Edition), plus ISO 14971 Risk Management documentation, the MSCU01M Series delivers the isolation integrity, safety assurance, and manufacturability required for medical instrumentation, monitoring devices, and patient-connected systems.

Table of contents

Model Selection Guide P2
Input Specifications P2
Output Specifications P2
Output Voltage Tolerance P2
Isolation, Safety Standards P3
General Specifications P3
EMC Specifications P3
Environmental Specifications P3
Characteristic Curves P4
Package Specifications P19
Test Setup P20
Technical Notes P20
Packaging Information for Tube P21
Packaging Information for Tape & Reel P21
Soldering and Reflow Considerations P22
Part Number Structure P23
MTBF and Reliability P23

Model Selection Guide

Model Number	Input Voltage (Range)	Output Voltage	Output Current	Input Current		Max. capacitive Load	Efficiency (typ.)
			Max.	@Max. Load	@No Load		@Max. Load
	VDC	VDC	mA	mA(typ.)	mA(typ.)	μF	%
MSCU01-05S05M	5 (4.5 ~ 5.5)	5	200	263	50	220	76
MSCU01-05S12M		12	84	252			80
MSCU01-05S15M		15	68	246			83
MSCU01-05D12M		±12	±42	252		100#	80
MSCU01-05D15M		±15	±33	236			84
MSCU01-12S05M	12 (10.8 ~ 13.2)	5	200	110	35	220	76
MSCU01-12S12M		12	84	106			79
MSCU01-12S15M		15	68	106			80
MSCU01-12D12M		±12	±42	106		100#	79
MSCU01-12D15M		±15	±33	103			80
MSCU01-24S05M	24 (21.6 ~ 26.4)	5	200	55	20	220	76
MSCU01-24S12M		12	84	53			80
MSCU01-24S15M		15	68	53			80
MSCU01-24D12M		±12	±42	53		100#	80
MSCU01-24D15M		±15	±33	52			80

*Please refer to the attached graph for the minimum load value. # For each output

Input Specifications

Parameter	Model	Min.	Typ.	Max.	Unit
Input Voltage Range	5V Input Models	4.5	5	5.5	VDC
	12V Input Models	10.8	12	13.2	
	24V Input Models	21.6	24	26.4	
Input Surge Voltage (1 sec. max.)	5V Input Models	-0.7	---	9	
	12V Input Models	-0.7	---	18	
	24V Input Models	-0.7	---	30	
Input Filter	All Models	Internal Capacitor			

Output Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Setting Accuracy		---	±1.0	±3.0	%Vnom.
Output Voltage Balance	Dual Output, Balanced Loads	---	±0.1	±1.0	%
Line Regulation	For Vin Change of 1%	---	±1.2	±1.5	%
Load Regulation	Io=10% to 100%	---	---	±10	%
Ripple & Noise	0-20 MHz Bandwidth	---	---	100	mV P-P
Temperature Coefficient		---	±0.01	±0.02	%/℃
Short Circuit Protection	Continuous, Automatic Recovery				

Output Voltage Tolerance

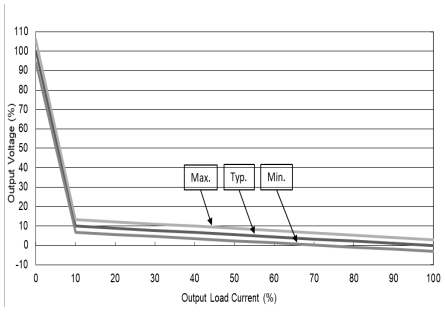

Output Voltage VS Output Load Current

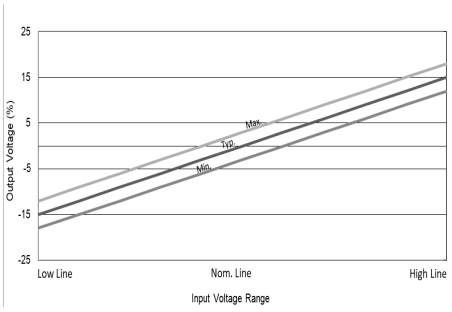

Output Voltage VS Input Voltage Range

Isolation, Safety Standards

Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	60 Seconds Reinforced insulation, rated for 250Vrms working voltage	4000	---	---	VAC
Leakage Current	240VAC, 60Hz	---	---	2	μA
I/O Isolation Resistance	500 VDC	10	---	---	GΩ
I/O Isolation Capacitance	100kHz, 1V	---	20	---	pF
Safety Standards	ANSI/AAMI ES60601-1, CAN/CSA-C22.2 No. 60601-1				
	IEC/EN 60601-1 3.2 Edition 2xMOPP				
Safety Approvals	ANSI/AAMI ES60601-1 2xMOPP recognition(UL certificate), IEC/EN 60601-1 3.2 Edition(CB-report)				

General Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
Switching Frequency		---	55	---	kHz
MTBF (calculated)	MIL-HDBK-217F@25℃, Ground Benign	4,771,507	---	---	Hours
Moisture Sensitivity Level (MSL)	IPC/JEDEC J-STD-020D.1	Level 2			

EMC Specifications

Parameter	Standards & Level			Performance
$EMI_{(5)}$	Conduction	EN 55011	With external components	Class A
	Radiation		Without external components	
$EMS_{(5)}$	EN 60601-1-2 4th			
	ESD	EN 61000-4-2 Air ± 15kV , Contact ± 8kV		A
	Radiated immunity	EN 61000-4-3 10V/m		A
	Fast transient	EN 61000-4-4 ±2kV		A
	Surge	EN 61000-4-5 ±1kV		A
	Conducted immunity	EN 61000-4-6 10Vrms		A
	PFMF	EN 61000-4-8 30A/m		A

Environmental Specifications

Parameter	Min.	Max.	Unit
Operating Ambient Temperature Range (See Power Derating Curve)	-40	+95	℃
Case Temperature	---	+105	℃
Storage Temperature Range	-50	+125	℃
Humidity (non condensing)	---	95	% rel. H
Lead-free Reflow Solder Process	IPC/JEDEC J-STD-020D.1		

Notes

1 Specifications typical at Ta=+25℃, resistive load, nominal input voltage and rated output current unless otherwise noted.
2 Please do not operate the product without a minimum load condition.
3 We recommend to protect the converter by a slow blow fuse in the input supply line.
4 Other input and output voltage may be available, please contact MINMAX.
5 The external components might be required to meet EMI/EMS standard for some of test items. Please contact MINMAX for the solution in detail.
6 Specifications are subject to change without notice.
7 The repeated high voltage isolation testing of the converter can degrade isolation capability, to a lesser or greater degree depending on materials, construction, environment and reflow solder process. Any material is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage. Furthermore, the high voltage isolation capability after reflow solder process should be evaluated as it is applied on system.

Characteristic Curves

All test conditions are at 25°C The figures are identical for MSCU01-05S05M

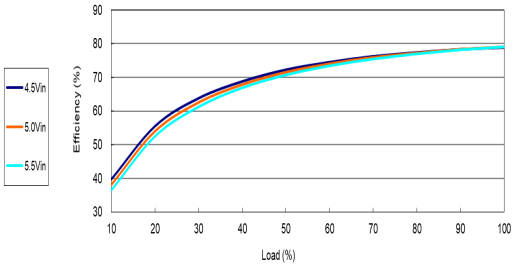

Efficiency Versus Output Current

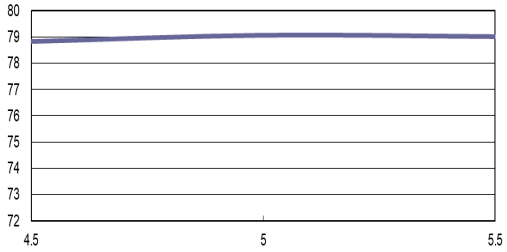

Efficiency Versus Input Voltage
Full Load

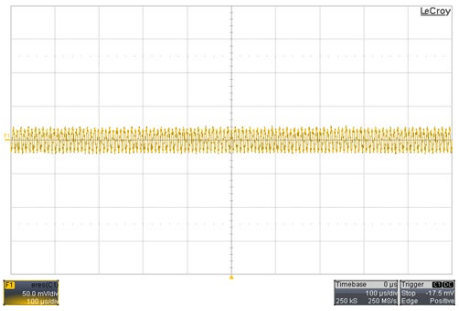

Typical Output Ripple and Noise
V_{in}=$V_{in\ nom}$; Full Load

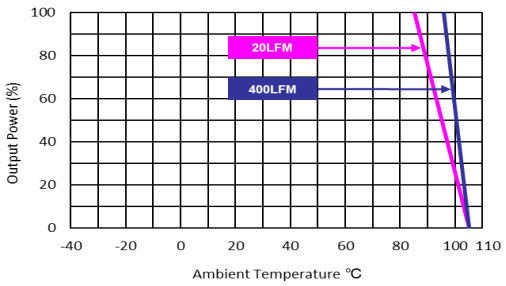

Derating Output Current Versus Ambient Temperature and Airflow
V_{in}=$V_{in\ nom}$

Characteristic Curves

All test conditions are at 25°C The figures are identical for MSCU01-05S12M

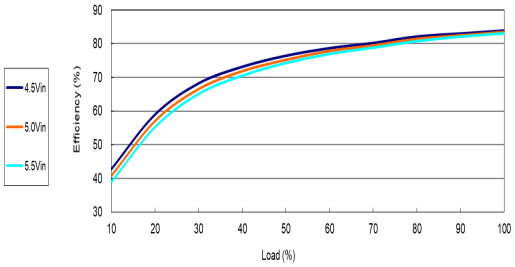

Efficiency Versus Output Current

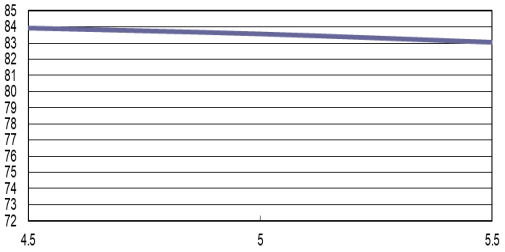

Efficiency Versus Input Voltage
Full Load

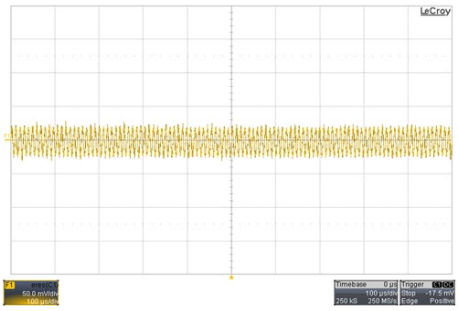

Typical Output Ripple and Noise
V_{in}=$V_{in\ nom}$; Full Load

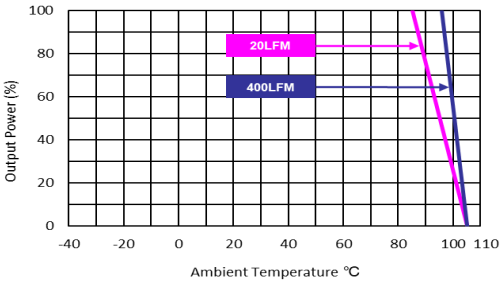

Derating Output Current Versus Ambient Temperature and Airflow
V_{in}=$V_{in\ nom}$

Characteristic Curves

All test conditions are at 25℃ The figures are identical for MSCU01-05S15M

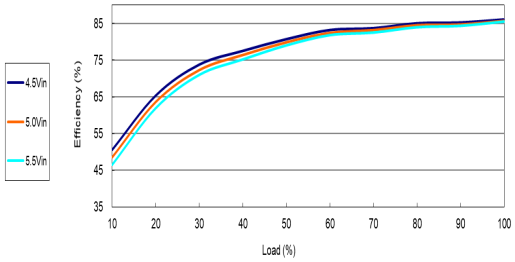

Efficiency Versus Output Current

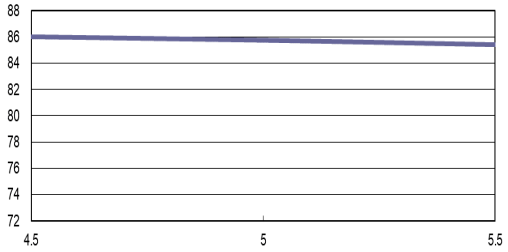

Efficiency Versus Input Voltage
Full Load

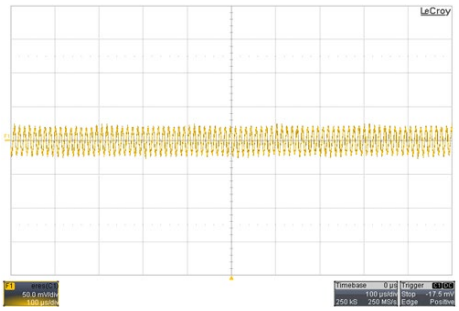

Typical Output Ripple and Noise
V_{in}=$V_{in\ nom}$; Full Load

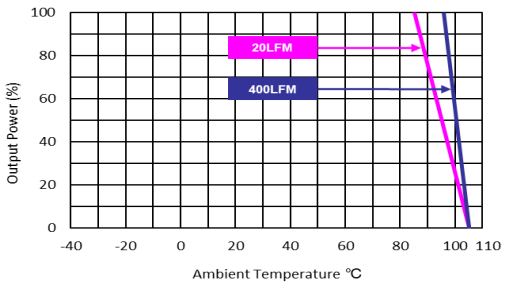

Derating Output Current Versus Ambient Temperature and Airflow
V_{in}=$V_{in\ nom}$

Characteristic Curves

All test conditions are at 25°C The figures are identical for MSCU01-05D12M

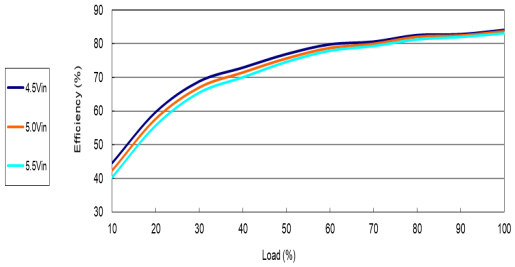

Efficiency Versus Output Current

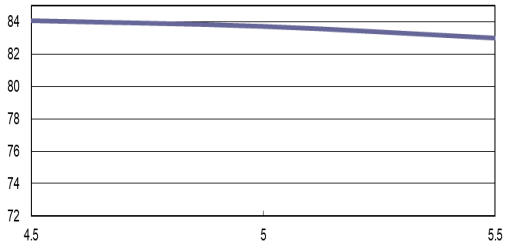

Efficiency Versus Input Voltage
Full Load

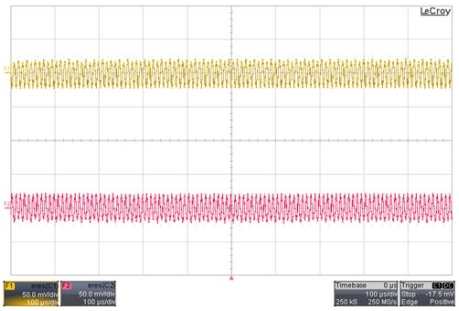

Typical Output Ripple and Noise
V_{in}=$V_{in\ nom}$; Full Load

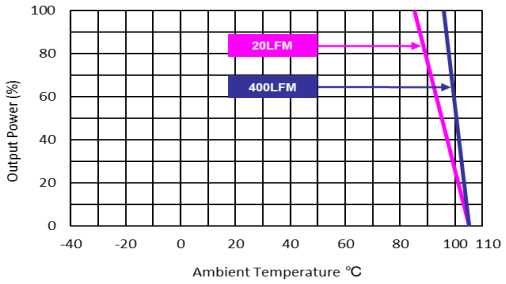

Derating Output Current Versus Ambient Temperature and Airflow
V_{in}=$V_{in\ nom}$

Characteristic Curves

All test conditions are at 25°C The figures are identical for MSCU01-05D15M

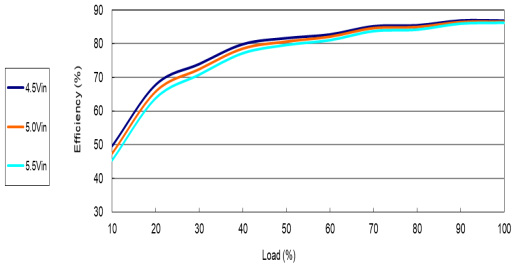

Efficiency Versus Output Current

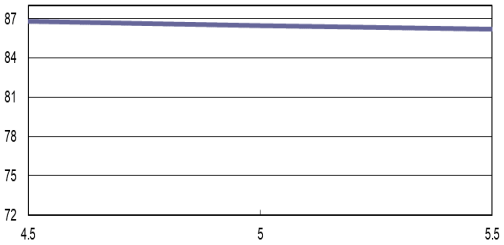

Efficiency Versus Input Voltage
Full Load

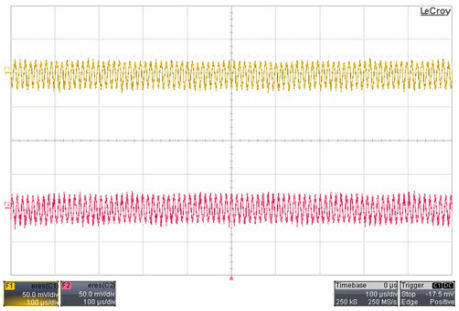

Typical Output Ripple and Noise
V_{in}=$V_{in\ nom}$; Full Load

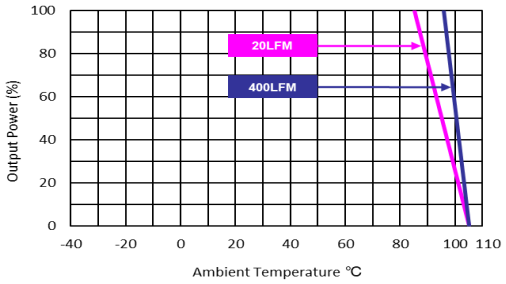

Derating Output Current Versus Ambient Temperature and Airflow
V_{in}=$V_{in\ nom}$

Characteristic Curves

All test conditions are at 25℃ The figures are identical for MSCU01-12S05M

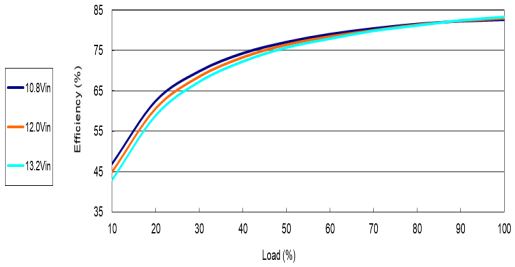

Efficiency Versus Output Current

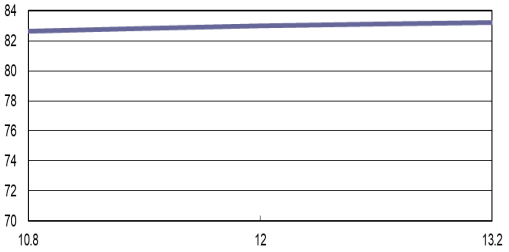

Efficiency Versus Input Voltage
Full Load

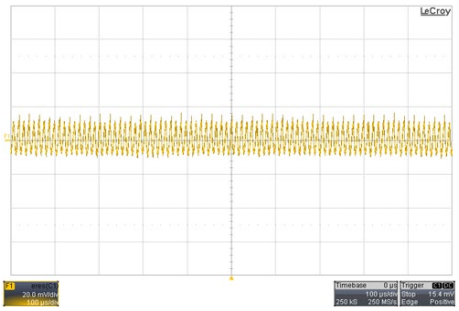

Typical Output Ripple and Noise
V_{in}=$V_{in\ nom}$; Full Load

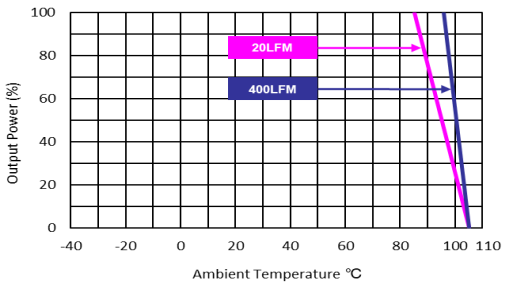

Derating Output Current Versus Ambient Temperature and Airflow
V_{in}=$V_{in\ nom}$

Characteristic Curves

All test conditions are at 25°C The figures are identical for MSCU01-12S12M

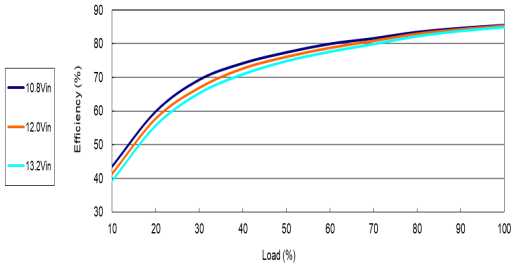

Efficiency Versus Output Current

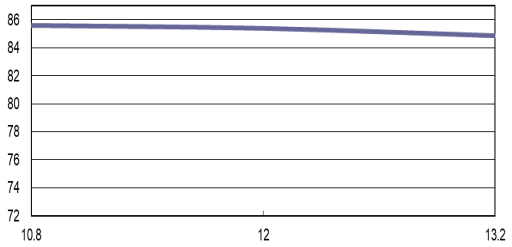

Efficiency Versus Input Voltage
Full Load

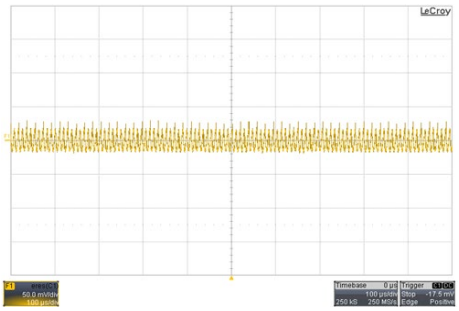

Typical Output Ripple and Noise
V_{in}=$V_{in\ nom}$; Full Load

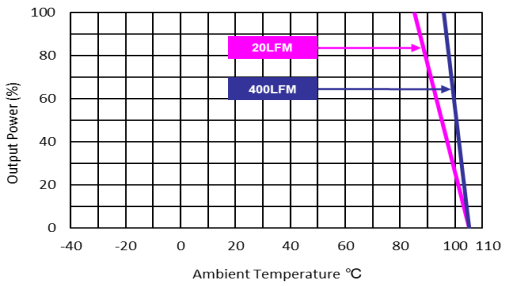

Derating Output Current Versus Ambient Temperature and Airflow
V_{in}=$V_{in\ nom}$

Characteristic Curves

All test conditions are at 25°C The figures are identical for MSCU01-12S15M

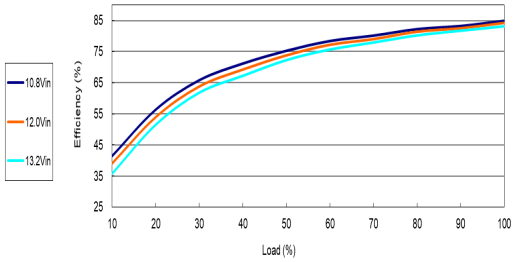

Efficiency Versus Output Current

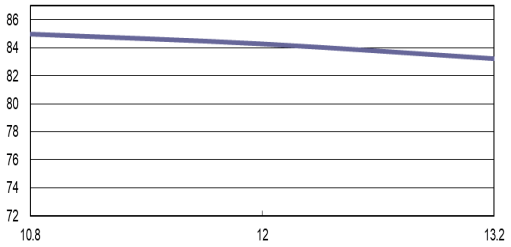

Efficiency Versus Input Voltage
Full Load

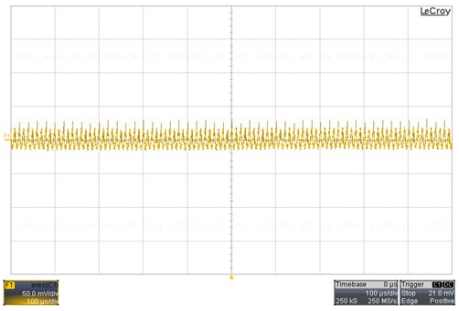

Typical Output Ripple and Noise
V_{in}=$V_{in\ nom}$; Full Load

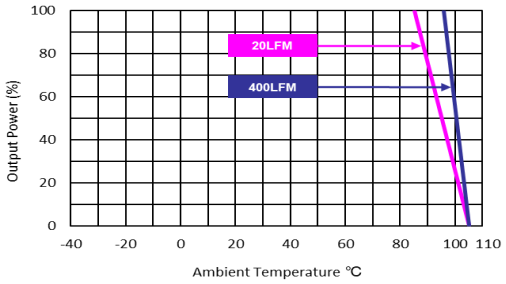

Derating Output Current Versus Ambient Temperature and Airflow
V_{in}=$V_{in\ nom}$

Characteristic Curves

All test conditions are at 25°C The figures are identical for MSCU01-12D12M

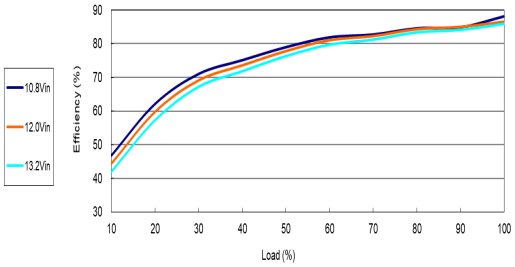

Efficiency Versus Output Current

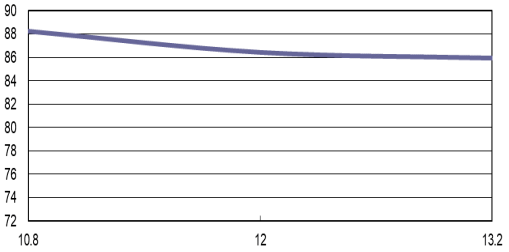

Efficiency Versus Input Voltage
Full Load

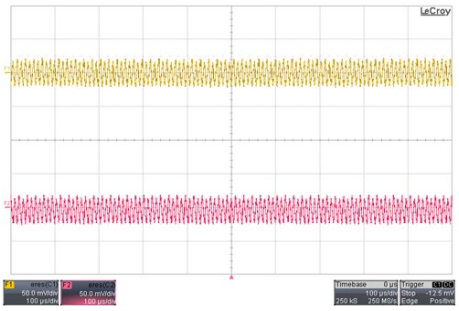

Typical Output Ripple and Noise
V_{in}=$V_{in\ nom}$; Full Load

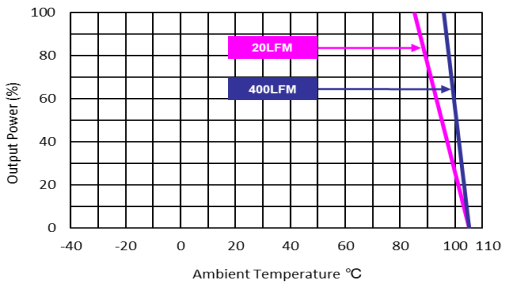

Derating Output Current Versus Ambient Temperature and Airflow
V_{in}=$V_{in\ nom}$

Characteristic Curves

All test conditions are at 25°C The figures are identical for MSCU01-12D15M

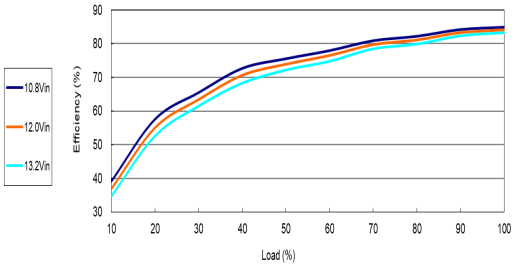

Efficiency Versus Output Current

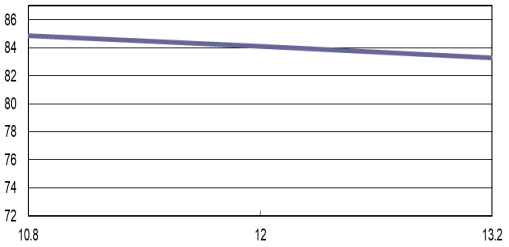

Efficiency Versus Input Voltage
Full Load

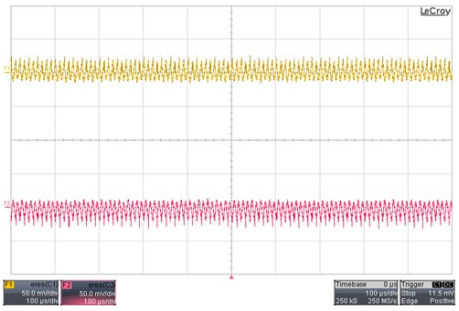

Typical Output Ripple and Noise
V_{in}=$V_{in\ nom}$; Full Load

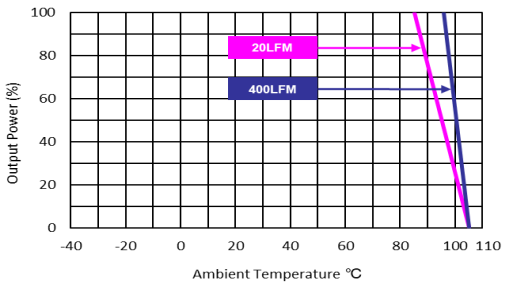

Derating Output Current Versus Ambient Temperature and Airflow
V_{in}=$V_{in\ nom}$

Characteristic Curves

All test conditions are at 25°C The figures are identical for MSCU01-24S05M

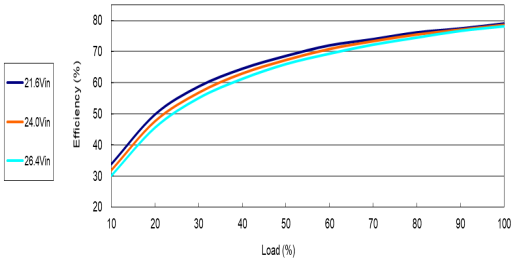

Efficiency Versus Output Current

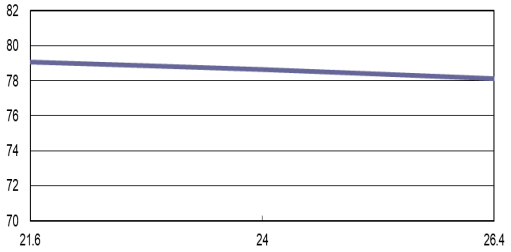

Efficiency Versus Input Voltage
Full Load

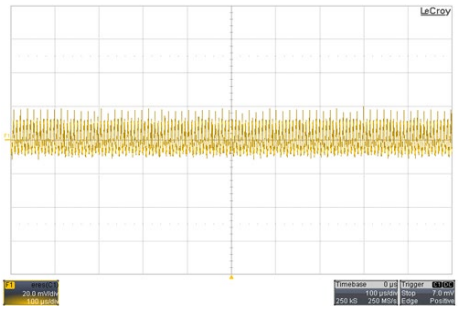

Typical Output Ripple and Noise
V_{in}=$V_{in\ nom}$; Full Load

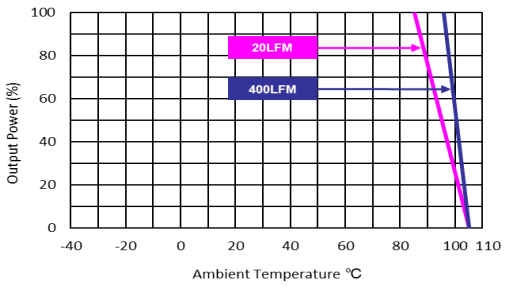

Derating Output Current Versus Ambient Temperature and Airflow
V_{in}=$V_{in\ nom}$

Characteristic Curves

All test conditions are at 25°C The figures are identical for MSCU01-24S12M

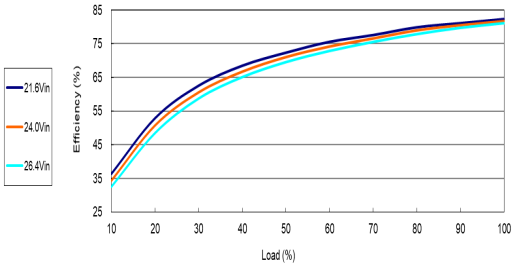

Efficiency Versus Output Current

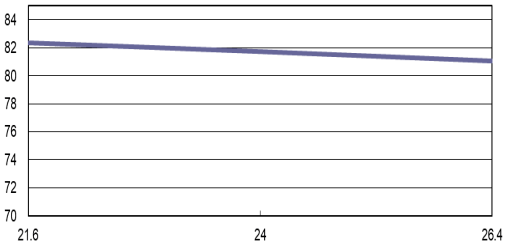

Efficiency Versus Input Voltage
Full Load

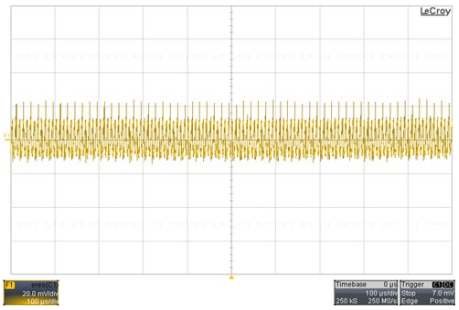

Typical Output Ripple and Noise
V_{in}=$V_{in\ nom}$; Full Load

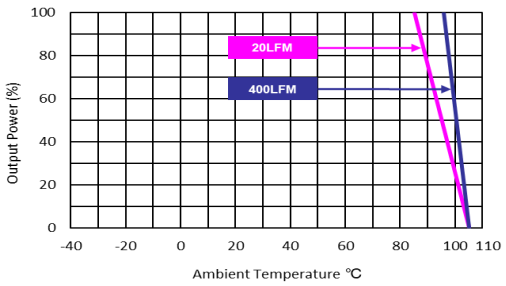

Derating Output Current Versus Ambient Temperature and Airflow
V_{in}=$V_{in\ nom}$

Characteristic Curves

All test conditions are at 25°C The figures are identical for MSCU01-24S15M

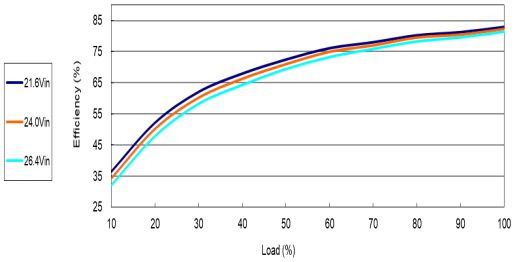

Efficiency Versus Output Current

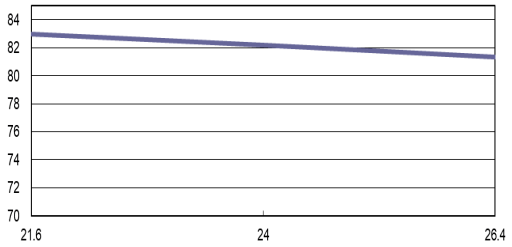

Efficiency Versus Input Voltage
Full Load

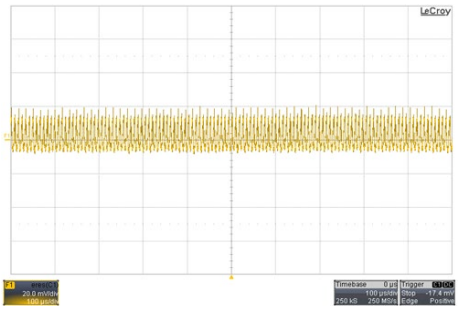

Typical Output Ripple and Noise
V_{in}=$V_{in\ nom}$; Full Load

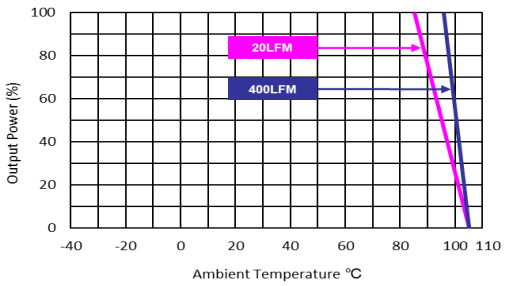

Derating Output Current Versus Ambient Temperature and Airflow
V_{in}=$V_{in\ nom}$

Characteristic Curves

All test conditions are at 25°C The figures are identical for MSCU01-24D12M

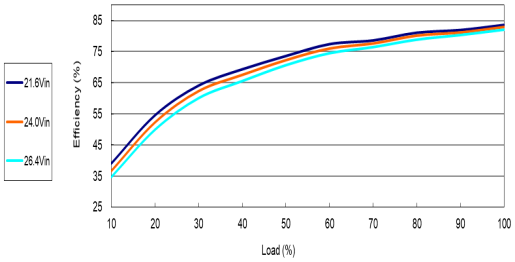

Efficiency Versus Output Current

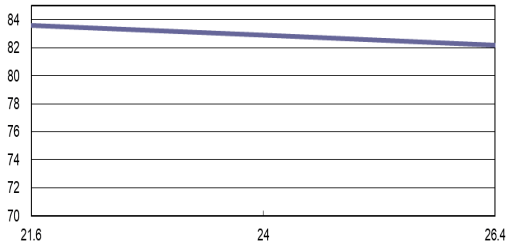

Efficiency Versus Input Voltage
Full Load

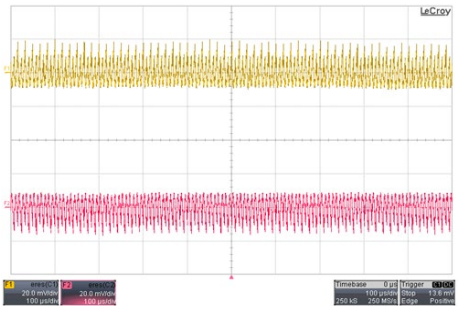

Typical Output Ripple and Noise
V_{in}=$V_{in\ nom}$; Full Load

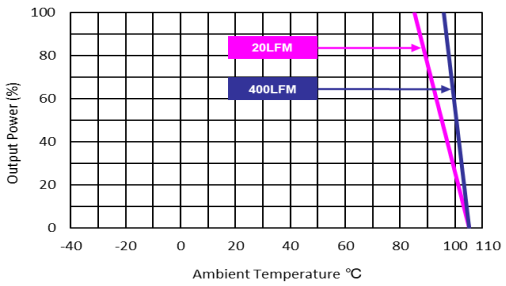

Derating Output Current Versus Ambient Temperature and Airflow
V_{in}=$V_{in\ nom}$

Characteristic Curves

All test conditions are at 25°C The figures are identical for MSCU01-24D15M

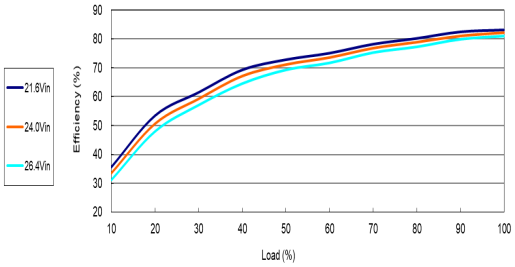

Efficiency Versus Output Current

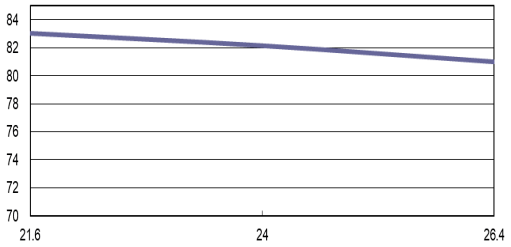

Efficiency Versus Input Voltage
Full Load

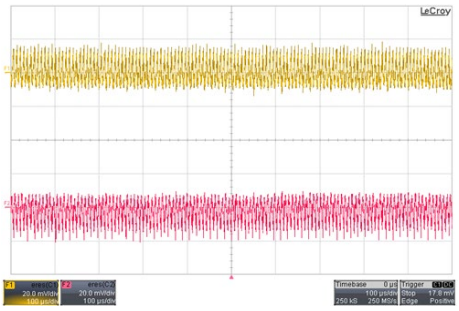

Typical Output Ripple and Noise
V_{in}=$V_{in\ nom}$; Full Load

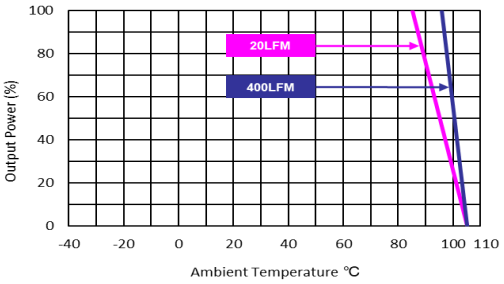

Derating Output Current Versus Ambient Temperature and Airflow
V_{in}=$V_{in\ nom}$

Package Specifications

Mechanical Dimensions

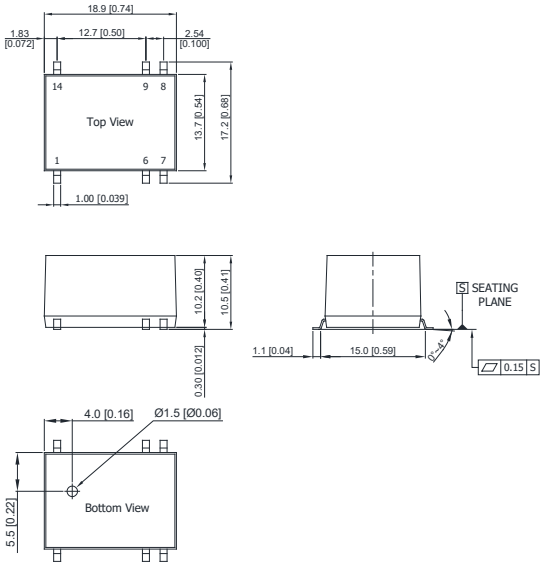

Connecting Pin Patterns

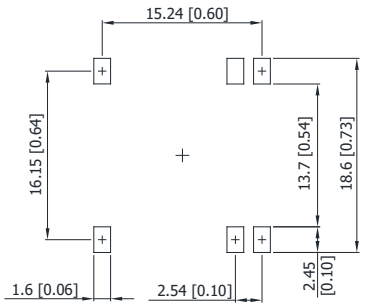

- All dimensions in mm (inches)
- Tolerance: X.X±0.5 (X.XX±0.02)
  X.XX±0.25 (X.XXX±0.010)
- Pins ±0.05 (±0.002)

Pin Connections

Pin	Single Output	Dual Output
1	-Vin	-Vin
6	NC	Common
7	NC	-Vout
8	+Vout	+Vout
9	-Vout	Common
14	+Vin	+Vin

NC: No Connection

Physical Characteristics

Case Size	:	18.9x13.7x10.2 mm (0.74x0.54x0.40 inches)
Case Material	:	Plastic resin (flammability to UL 94V-0 rated)
Pin Material	:	Phosphor Bronze
Weight	:	4.1g

Test Setup

Peak-to-Peak Output Noise Measurement Test

Refer to the output specifications or add 4.7µF capacitor if the output specifications undefine Cout.. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC-DC Converter.

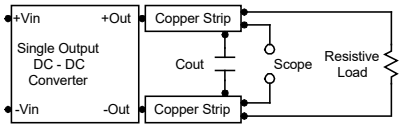

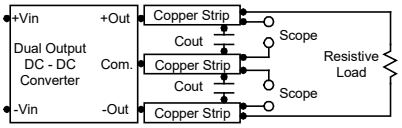

Technical Notes

Maximum Capacitive Load

The MSCU01M series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. For optimum performance we recommend 100µF maximum capacitive load for dual outputs and 220µF capacitive load for single outputs. The maximum capacitance can be found in the data sheet.

Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup. Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1.0Ω at 100 kHz) capacitor of a 2.2µF for the 5V input devices, a 1.0µF for the 12V input devices and a 0.47µF for the 24V input devices.

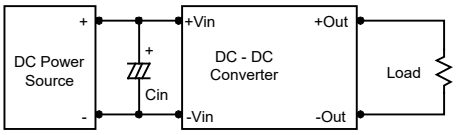

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 3.3µF capacitors at the output.

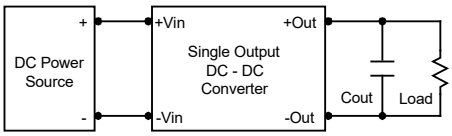

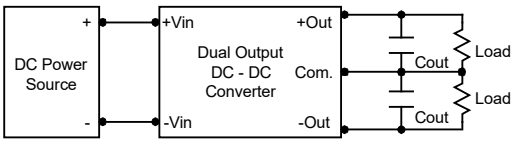

Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 105°C. The derating curves are determined from measurements obtained in a test setup.



Packaging Information for Tube

Tube

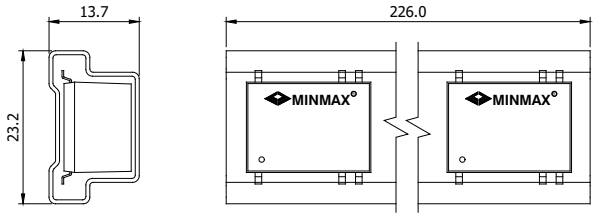

Plug



Unit: mm
10 PCS per TUBE

Packaging Information for Tape & Reel

Tape

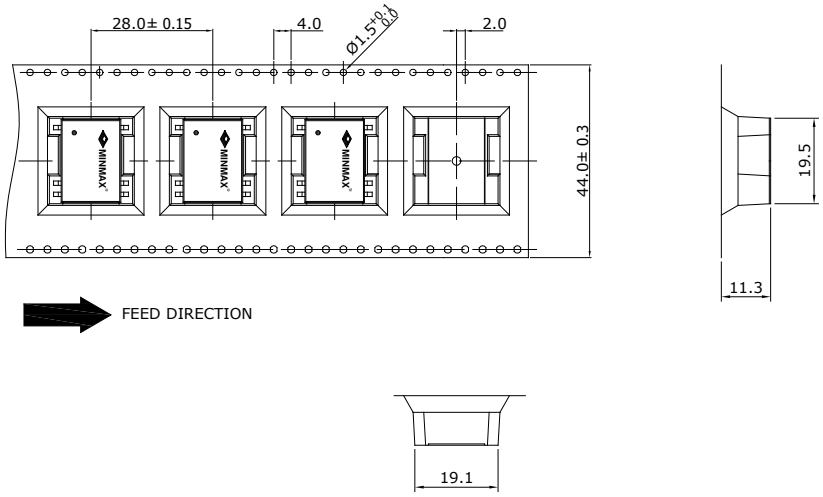

Reel

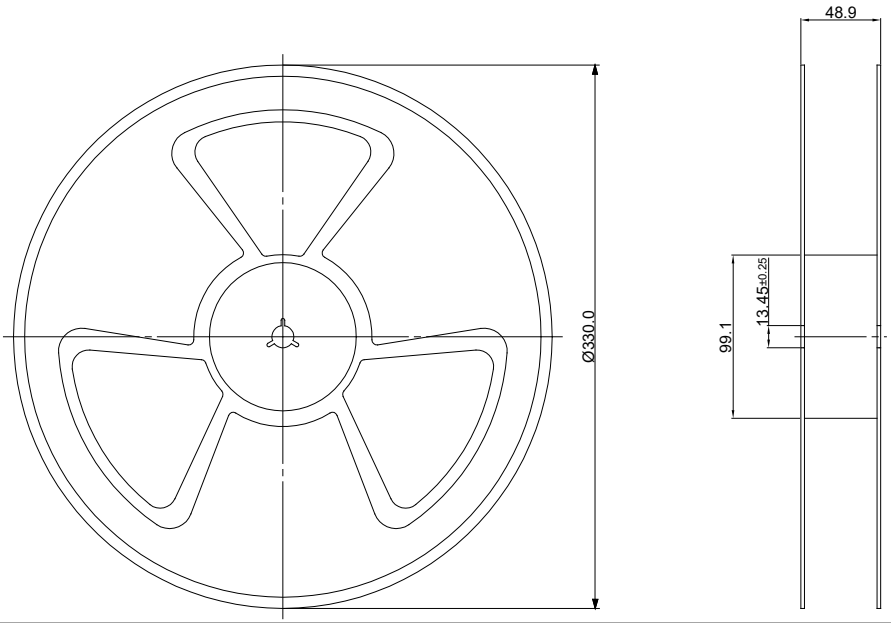

Packaging Style	Quantity
With Heatsink Tube	N/A
Tape and Reel to IEC 286-3 Specifications	200

Soldering and Reflow Considerations

Profile	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Average ramp-up rate(Ts max. To Tp)	3°C/second max.	3°C/second max.
Preheat · Temperature Min ($Ts_{min.}$) · Temperature Max ($Ts_{max.}$) · Time (Ts_{min} to Ts_{max}) (ts)	 100°C 150°C 60~120 seconds	 150°C 200°C 60~180 seconds
Time maintained above: · Temperature (T_L) · Time (t_L)	 183°C 60~150 seconds	 217°C 60~150 seconds
Peak Temperature (Tp)	See Table 4-1	See Table 4-2
Time within 5°C of actual Peak Temperature $(tp)^2$	10~30 seconds	20~40 seconds
Ramp-down Rate	6°C/second max.	6°C/second max.
Time 25°C to Peak Temperature	6 minutes max.	8 minutes max.

Note 1: All temperatures refer to topside of the package, measured on the package body surface.
Note 2: Time within 5°C of actual peak temperature (tp) specified for the reflow profiles is a "supplier" minimum and "user" maximum.

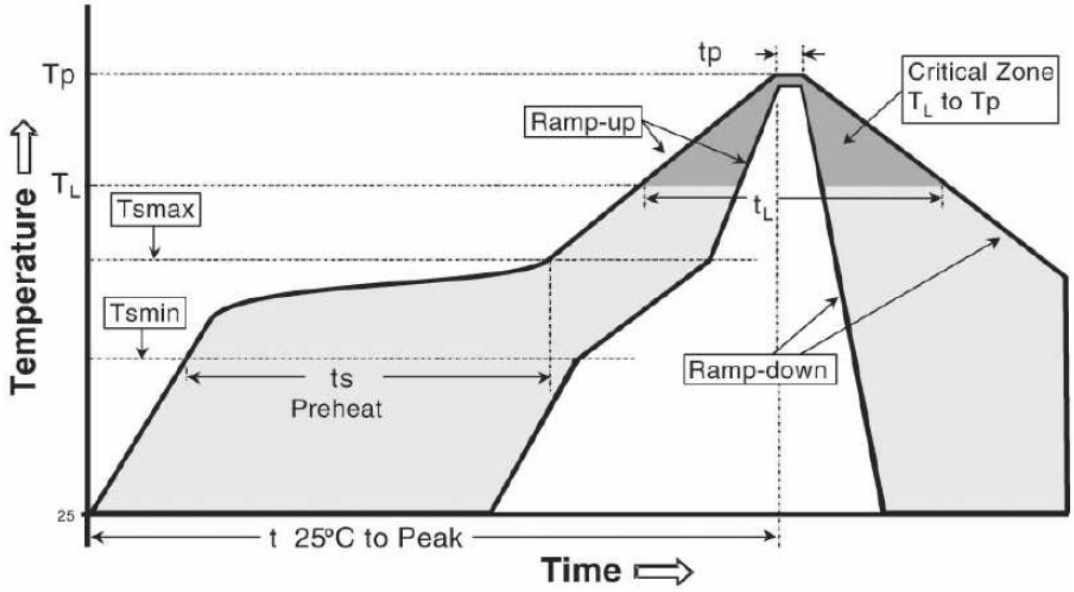

Table 4-1 SnPb Eutectic Process-Classification Temperatures (T_C)

	Volume mm^3	Volume mm^3
Package Thickness	<350	≥350
<2.5mm	235°C	220°C
≥2.5mm	220°C	220°C

Table 4-2 Pb-Free Process-Classification Temperatures (T_C)

	Volume mm^3	Volume mm^3	Volume mm^3
Package Thickness	<350	350-2000	>2000
<1.6mm	260°C	260°C	260°C
1.6mm-2.5mm	260°C	250°C	245°C
>2.5mm	250°C	245°C	245°C

Part Number Structure

M	SC	U	01	-	05	S	05	M
	Package Type SMD-14	Output Regulation Unregulated	Output Power 1 Watt		Input Voltage Range 05: 4.5 ~ 5.5 VDC 12: 10.8 ~ 13.2 VDC 24: 21.6 ~ 26.4 VDC	Output Quantity S: Single D: Dual	Output Voltage 05: 5 VDC 12: 12 VDC 15: 15 VDC	Application Medical

MTBF and Reliability

The MTBF of MSCU01M series of DC-DC converters has been calculated using

MIL-HDBK 217F NOTICE2, Operating Temperature 25℃, Ground Benign.

Model	MTBF	Unit
MSCU01-05S05M	4,774,882	Hours
MSCU01-05S12M	5,042,214	
MSCU01-05S15M	5,239,310	
MSCU01-05D12M	5,042,214	
MSCU01-05D15M	5,303,730	
MSCU01-12S05M	4,771,507	
MSCU01-12S12M	4,974,054	
MSCU01-12S15M	5,039,132	
MSCU01-12D12M	4,974,054	
MSCU01-12D15M	5,039,132	
MSCU01-24S05M	4,774,937	
MSCU01-24S12M	5,042,198	
MSCU01-24S15M	5,040,895	
MSCU01-24D12M	5,042,198	
MSCU01-24D15M	5,040,895	