

FEATURES

- ▶ Industrial SMD Package
- ▶ Ultra-wide 4:1 Input Voltage Range
- ▶ Fully Regulated Output Voltage
- ▶ I/O Isolation 1500 VDC
- ▶ Operating Ambient Temp. Range -40°C to +80°C
- ▶ Under-voltage, Overload and Short Circuit Protection
- ▶ Remote On/Off Control
- ▶ Cleaning-washable Process Available(option)
- ▶ Qualified for Lead-free Reflow Solder Process According to IPC/JEDEC J-STD-020D.1
- ▶ Tape & Reel Package Available
- ▶ UL/cUL/IEC/EN 62368-1(60950-1) Safety Approval


PRODUCT OVERVIEW

The MINMAX MSGWI06 series is a range of isolated 6W DC-DC converter modules featuring fully regulated output voltages and ultra-wide 4:1 input voltage ranges. These products are with a very small footprint occupying just 4.5cm² (0.7 square in.) on PCB. All models are qualified for lead free reflow solder processes according to IPC J-STD-020D.1. An excellent efficiency allows an operating temperature range of -40°C to +80°C. Further features include remote On/Off control, under-voltage, over load and short circuit protection.

The very compact dimensions of these DC-DC converters make them an ideal solution for many space critical applications in battery-powered equipment and instrumentation.

Model Selection Guide

| Model Number | Input Voltage (Range) VDC | Output Voltage VDC | Output Current | | Input Current | | Max. capacitive Load μF | Efficiency (typ.) @Max. Load % |
|----------------|------------------------------|-----------------------|----------------|------|---------------|----------|----------------------------|-----------------------------------|
| | | | Max. | Min. | @Max. Load | @No Load | | |
| | | | mA | mA | mA(typ.) | mA(typ.) | | |
| MSGWI06-24S033 | 24 (9 ~ 36) | 3.3 | 1450 | 218 | 262 | 30 | 330 | 76 |
| MSGWI06-24S05 | | 5 | 1200 | 180 | 316 | | | 79 |
| MSGWI06-24S12 | | 12 | 500 | 75 | 301 | | | 83 |
| MSGWI06-24S15 | | 15 | 400 | 60 | 301 | | 100 | 83 |
| MSGWI06-24S24 | | 24 | 250 | 38 | 301 | | | 83 |
| MSGWI06-24D05 | | ±5 | ±600 | ±90 | 301 | | | 100# |
| MSGWI06-24D12 | | ±12 | ±250 | ±38 | 301 | | 83 | |
| MSGWI06-24D15 | | ±15 | ±200 | ±30 | 301 | | 83 | |
| MSGWI06-48S033 | | 48 (18 ~ 75) | 3.3 | 1450 | 218 | | 131 | 20 |
| MSGWI06-48S05 | 5 | | 1200 | 180 | 158 | 79 | | |
| MSGWI06-48S12 | 12 | | 500 | 75 | 151 | 83 | | |
| MSGWI06-48S15 | 15 | | 400 | 60 | 151 | 100 | 83 | |
| MSGWI06-48S24 | 24 | | 250 | 38 | 151 | | 83 | |
| MSGWI06-48D05 | ±5 | | ±600 | ±90 | 151 | | 100# | |
| MSGWI06-48D12 | ±12 | | ±250 | ±38 | 151 | 83 | | |
| MSGWI06-48D15 | ±15 | | ±200 | ±30 | 151 | 83 | | |

For each output

Input Specifications

| Parameter | Model | Min. | Typ. | Max. | Unit |
|-----------------------------------|------------------|---------------------------------|------|------|------|
| Input Surge Voltage (1 sec. max.) | 24V Input Models | -0.7 | --- | 50 | VDC |
| | 48V Input Models | -0.7 | --- | 100 | |
| Start-Up Threshold Voltage | 24V Input Models | --- | --- | 9 | |
| | 48V Input Models | --- | --- | 18 | |
| Under Voltage Shutdown | 24V Input Models | --- | --- | 8.5 | |
| | 48V Input Models | --- | --- | 17 | |
| Short Circuit Input Power | | --- | --- | 3000 | mW |
| Input Filter | All Models | Internal Pi Type | | | |
| Conducted EMI | | Compliance to EN 55022, class A | | | |

Remote On/Off Control

| Parameter | Conditions | Min. | Typ. | Max. | Unit |
|-----------------------------|------------|------------------------------|------|------|------|
| Converter On | | 2.5V ~ 50VDC or Open Circuit | | | |
| Converter Off | | -0.7V ~ 0.8V | | | |
| Control Input Current (on) | Vin-RC=5V | --- | --- | 500 | μA |
| Control Input Current (off) | Vin-RC=0V | --- | --- | -500 | μA |
| Control Common | | Referenced to Negative Input | | | |
| Standby Input Current | | --- | --- | 10 | mA |

Output Specifications


| Parameter | Conditions | Min. | Typ. | Max. | Unit |
|---------------------------------|-----------------------------|--------------------------------|-------|-------|-------------------|
| Output Voltage Setting Accuracy | | --- | ±1.0 | ±2.0 | %Vnom. |
| Output Voltage Balance | Dual Output, Balanced Loads | --- | ±1.0 | --- | % |
| Line Regulation | Vin=Min. to Max. @Full Load | --- | ±0.5 | ±1.0 | % |
| Load Regulation | Io=15% to 100% | --- | ±0.5 | ±1.2 | % |
| Ripple & Noise | 0-20 MHz Bandwidth | --- | --- | 100 | mV _{p-p} |
| Transient Recovery Time | 25% Load Step Change | --- | 300 | 600 | μsec |
| Transient Response Deviation | | --- | ±3 | --- | % |
| Temperature Coefficient | | --- | ±0.01 | ±0.02 | %/°C |
| Over Load Protection | Foldback | 110 | 150 | --- | % |
| Short Circuit Protection | | Continuous, Automatic Recovery | | | |

General Specifications



| Parameter | Conditions | Min. | Typ. | Max. | Unit |
|----------------------------------|---|---------|------|------|-------|
| I/O Isolation Voltage | 60 Seconds | 1500 | --- | --- | VDC |
| | 1 Second | 1800 | --- | --- | VDC |
| I/O Isolation Resistance | 500 VDC | 1000 | --- | --- | MΩ |
| I/O Isolation Capacitance | 100kHz, 1V | --- | 1200 | 1500 | pF |
| Switching Frequency | | --- | 330 | --- | kHz |
| MTBF (calculated) | MIL-HDBK-217F@25°C, Ground Benign | 350,000 | | | Hours |
| Moisture Sensitivity Level (MSL) | IPC/JEDEC J-STD-020D.1 | Level 2 | | | |
| Safety Approvals | UL/cUL 62368-1 recognition(UL certificate), IEC/EN 62368-1 & 60950-1(CB-report) | | | | |

Environmental Specifications

| Parameter | Min. | Max. | Unit |
|--|------------------------|------|----------|
| Operating Ambient Temperature Range (See Power Derating Curve) | -40 | +80 | °C |
| Case Temperature | --- | +105 | °C |
| Storage Temperature Range | -50 | +125 | °C |
| Humidity (non condensing) | --- | 95 | % rel. H |
| Lead-free Reflow Solder Process | IPC/JEDEC J-STD-020D.1 | | |

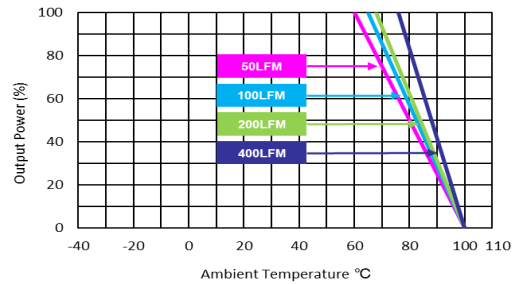Power Derating Curve

Notes

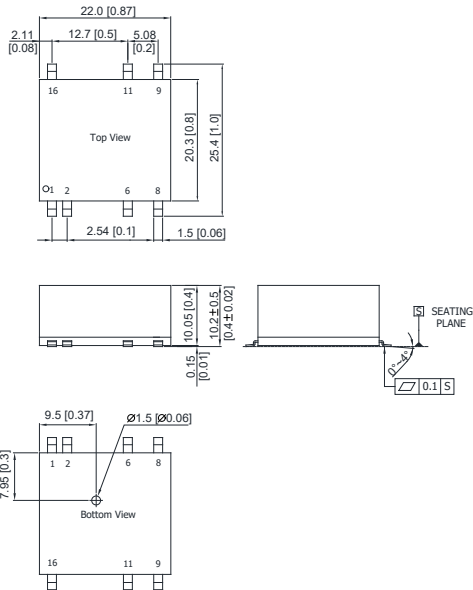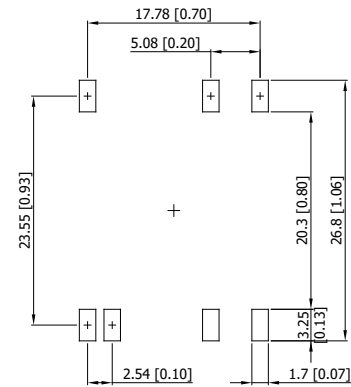- 1 Specifications typical at Ta=+25°C, resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%.
- 3 These power converters require a minimum output loading to maintain specified regulation, operation under no-load conditions will not damage these modules; however, they may not meet all specifications listed.
- 4 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 5 Other input and output voltage may be available, please contact MINMAX.
- 6 Specifications are subject to change without notice.
- 7 The repeated high voltage isolation testing of the converter can degrade isolation capability, to a lesser or greater degree depending on materials, construction, environment and and reflow solder process. Any material is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage. Furthermore, the high voltage isolation capability after reflow solder process should be evaluated as it is applied on system.

Package Specifications
Mechanical Dimensions

Connecting Pin Patterns


- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.25 (X.XX±0.01)
X.XX±0.13 (X.XXX±0.005)
- ▶ Pins ±0.05(±0.002)

Pin Connections

| Pin | Single Output | Dual Output |
|-----|---------------|---------------|
| 1 | Remote On/Off | Remote On/Off |
| 2 | -Vin | -Vin |
| 6 | NC | Common |
| 8 | NC | -Vout |
| 9 | +Vout | +Vout |
| 11 | -Vout | Common |
| 16 | +Vin | +Vin |

NC: No Connection

Physical Characteristics

| | |
|---------------|---|
| Case Size | : 22.0x20.3x10.2 mm (0.87x0.8x0.4 inches) |
| Case Material | : Non-Conductive Black Plastic (flammability to UL 94V-0 rated) |
| Pin Material | : Phosphor Bronze with Tin Plate Over Nickel Subplate |
| Weight | : 7.8g |


Order Code Table

| Standard | For cleaning-washable process |
|----------------|-------------------------------|
| MSGWI06-24S033 | MSGWI06-24S033-W |
| MSGWI06-24S05 | MSGWI06-24S05-W |
| MSGWI06-24S12 | MSGWI06-24S12-W |
| MSGWI06-24S15 | MSGWI06-24S15-W |
| MSGWI06-24S24 | MSGWI06-24S24-W |
| MSGWI06-24D05 | MSGWI06-24D05-W |
| MSGWI06-24D12 | MSGWI06-24D12-W |
| MSGWI06-24D15 | MSGWI06-24D15-W |
| MSGWI06-48S033 | MSGWI06-48S033-W |
| MSGWI06-48S05 | MSGWI06-48S05-W |
| MSGWI06-48S12 | MSGWI06-48S12-W |
| MSGWI06-48S15 | MSGWI06-48S15-W |
| MSGWI06-48S24 | MSGWI06-48S24-W |
| MSGWI06-48D05 | MSGWI06-48D05-W |
| MSGWI06-48D12 | MSGWI06-48D12-W |
| MSGWI06-48D15 | MSGWI06-48D15-W |

Test Setup

Peak-to-Peak Output Noise Measurement Test

Use a C_{out} 0.47 μ F ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC-DC Converter.

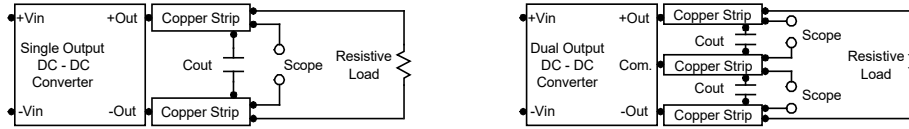

Technical Notes

Remote On/Off


Positive logic remote on/off turns the module on during a logic high voltage on the remote on/off pin, and off during a logic low. To turn the power module on and off, the user must supply a switch to control the voltage between the on/off terminal and the -Vin terminal. The switch can be an open collector or equivalent. A logic low is -0.7V to 0.8V. A logic high is 2.5V to 50V. The maximum sink current of the switch at on/off terminal during a logic low is -500 μ A. The maximum sink current of the switch at on/off terminal during a logic high is 500 μ A or open.

Overcurrent Protection

To provide protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure current limiting for an unlimited duration. At the point of current-limit inception, the unit shifts from voltage control to current control. The unit operates normally once the output current is brought back into its specified range.


Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup. Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1.0 Ω at 100 kHz) capacitor of a 4.7 μ F for the 24V input devices and a 2.2 μ F for the 48V devices.

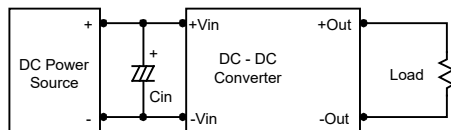

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 3.3 μ F capacitors at the output.

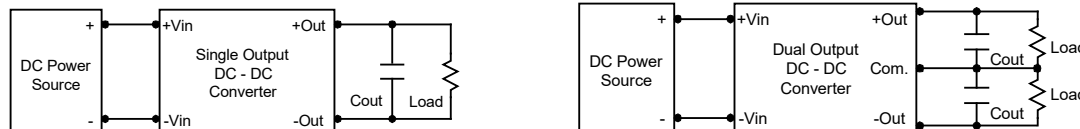

Maximum Capacitive Load

The MSGWI06 series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the data sheet.

Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 105°C. The derating curves are determined from measurements obtained in a test setup.

