

**FEATURES**

- ▶ Efficiency up to 86%
- ▶ 1500VDC Isolation
- ▶ MTBF > 1,000,000 Hours
- ▶ 2:1 Wide Input Range
- ▶ UL/cUL 60950-1 Safety Approval
- ▶ Short Circuit Protection
- ▶ Wide Operating Temperature Range
- ▶ Industry Standard Pinout
- ▶ UL 94V-0 Package Material
- ▶ Internal SMD Construction
- ▶ 3 Years Product Warranty


**PRODUCT OVERVIEW**

The MIW1200 Series is a family of compact 3W isolated DC-DC converters designed for reliable, space-efficient power conversion in industrial and embedded applications. It supports a wide 2:1 input range and delivers high efficiency up to 86%, helping reduce power loss and heat. With 1500VDC isolation, short-circuit protection, and a wide operating temperature range, it provides robust operation in demanding environments. Built with UL 94V-0 package material, internal SMD construction, and an industry-standard pinout, the MIW1200 Series enables easy drop-in integration. It also offers MTBF > 1,000,000 hours, UL/cUL 60950-1 safety approval, and a 3-year product warranty.

**Model Selection Guide**

Model Number	Input Voltage (Range) VDC	Output Voltage VDC	Output Current		Input Current		Reflected Ripple Current mA(typ.)	Max. capacitive Load μF	Efficiency (typ.) @Max. Load %
			Max.	Min.	@Max. Load	@No Load			
			mA	mA	mA(typ.)	mA(typ.)			
MIW1221	12 (9 ~ 18)	3.3	600	60	220	30	15	4000	75
MIW1222		5	500	50	267				78
MIW1223		12	250	25	305				82
MIW1224		15	200	20	309			1000#	81
MIW1225		±5	±250	±25	274				76
MIW1226		±12	±125	±12.5	313				80
MIW1227		±15	±100	±10	321				78
MIW1231	24 (18 ~ 36)	3.3	600	60	109	8	15	4000	76
MIW1232		5	500	50	130				80
MIW1233		12	250	25	150				83
MIW1234		15	200	20	149			1000#	84
MIW1235		±5	±250	±25	134				78
MIW1236		±12	±125	±12.5	152				82
MIW1237		±15	±100	±10	152				82
MIW1241	48 (36 ~ 75)	3.3	600	60	53	4	15	4000	78
MIW1242		5	500	50	64				82
MIW1243		12	250	25	74				85
MIW1244		15	200	20	73			1000#	86
MIW1245		±5	±250	±25	65				80
MIW1246		±12	±125	±12.5	74				84
MIW1247		±15	±100	±10	75				83

# For each output

Input Specifications					
Parameter	Model	Min.	Typ.	Max.	Unit
Input Surge Voltage (1 sec. max.)	12V Input Models	-0.7	---	25	VDC
	24V Input Models	-0.7	---	50	
	48V Input Models	-0.7	---	100	
Start-Up Threshold Voltage	12V Input Models	4.5	7	9	
	24V Input Models	8	12	18	
	48V Input Models	16	24	36	
Under Voltage Shutdown	12V Input Models	---	6.5	8.5	
	24V Input Models	---	11	17	
	48V Input Models	---	22	34	
Short Circuit Input Power	All Models	---	1000	2000	mW
Internal Power Dissipation		---	---	2500	mW
Conducted EMI		Compliance to EN 55032, class A			

Output Specifications					
Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Setting Accuracy	At 50% Load and Nominal Vin	---	---	±1.0	%Vom.
Output Voltage Balance	Dual Output, Balanced Loads	---	±0.5	±2.0	%
Line Regulation	Vin=Min. to Max.	---	±0.2	±0.5	%
Load Regulation	Io=10% to 100%	---	±0.2	±0.5	%
Ripple & Noise <sub>(3)</sub> (20MHz)		---	25	50	mV <sub>P-P</sub>
Transient Recovery Time	50% Load Step Change <sub>(2)</sub>	---	300	500	µs
Transient Response Deviation		---	±3	±6	%
Temperature Coefficient		---	±0.01	±0.02	%/°C
Over Load Protection	Foldback	120	---	---	%
Short Circuit Protection	Continuous				


General Specifications					
Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage (rated)	60 Seconds	1500	---	---	VDC
I/O Isolation Resistance	500 VDC	1000	---	---	MΩ
I/O Isolation Capacitance	100kHz, 1V	---	350	500	pF
Switching Frequency		200	300	450	kHz
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign	1,000,000	---	---	Hours
Safety Approvals	UL/cUL 60950-1 recognition(CSA certificate)				

Input Fuse		
12V Input Models	24V Input Models	48V Input Models
700mA Slow-Blow Type	350mA Slow-Blow Type	135mA Slow-Blow Type

### Environmental Specifications

Parameter	Conditions	Min.	Max.	Unit
Operating Ambient Temperature Range (For Power Derating see relative Derating Curve)		-25	+85	°C
Case Temperature		---	+100	°C
Storage Temperature Range		-50	+125	°C
Humidity (non condensing)		---	95	% rel. H
Cooling	Free-Air convection			
Lead Temperature (1.5mm from case for 10Sec.)		---	260	°C

### Power Derating Curve

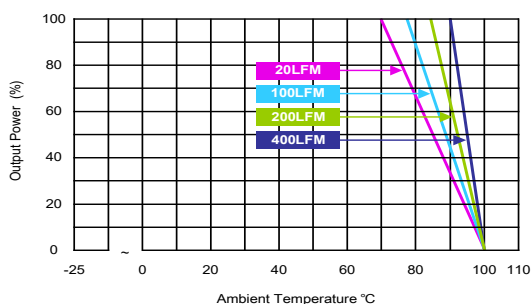


### Notes

- 1 Specifications typical at Ta=+25°C, resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 Transient recovery time is measured to within 1% error band for a step change in output load of 50% to 100%.
- 3 Ripple & Noise measurement bandwidth is 0-20MHz.
- 4 Please do not operate the product without a minimum load condition.
- 5 All DC-DC converters should be externally fused at the front end for protection.
- 6 Other input and output voltage may be available, please contact MINMAX.
- 7 Specifications are subject to change without notice.
- 8 The repeated high voltage isolation testing of the converter can degrade isolation capability, to a lesser or greater degree depending on materials, construction, environment and reflow solder process. Any material is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage. Furthermore, the high voltage isolation capability after reflow solder process should be evaluated as it is applied on system.

**Package Specifications**

## Mechanical Dimensions

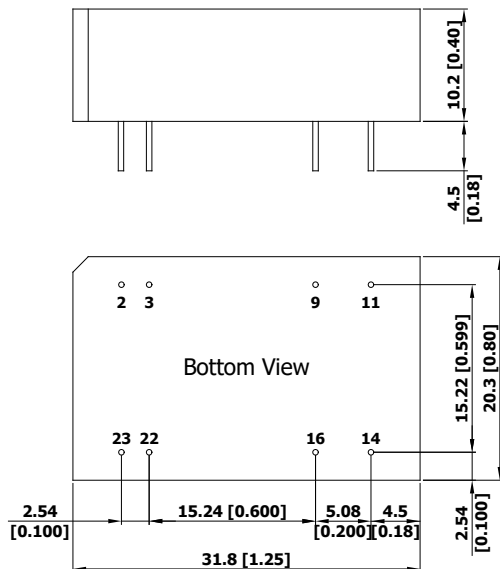

## Pin Connections

Pin	Single Output	Dual Output	Diameter mm (inches)
2	-Vin	-Vin	∅ 0.5 [0.02]
3	-Vin	-Vin	∅ 0.5 [0.02]
9	No Pin	Common	∅ 0.5 [0.02]
11	NC	-Vout	∅ 0.5 [0.02]
14	+Vout	+Vout	∅ 0.5 [0.02]
16	-Vout	Common	∅ 0.5 [0.02]
22	+Vin	+Vin	∅ 0.5 [0.02]
23	+Vin	+Vin	∅ 0.5 [0.02]

NC: No Connection

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.25 (X.XX±0.01)  
X.XX±0.13 (X.XXX±0.005)
- ▶ Pin diameter tolerance: X.X±0.05 (X.XX±0.002)


**Physical Characteristics**

Case Size	: 31.8x20.3x10.2mm (1.25x0.80x0.40 inches)
Case Material	: Plastic resin (flammability to UL 94V-0 rated)
Pin Material	: Phosphor Bronze
Weight	: 12.2g

### Test Setup


#### Input Reflected-Ripple Current Test Setup

Input reflected-ripple current is measured with an inductor  $L_{in}$  ( $4.7\mu H$ ) and  $C_{in}$  ( $220\mu F$ ,  $ESR < 1.0\Omega$  at 100 kHz) to simulate source impedance. Capacitor  $C_{in}$ , offsets possible battery impedance. Current ripple is measured at the input terminals of the module, measurement bandwidth is 0-500 kHz.

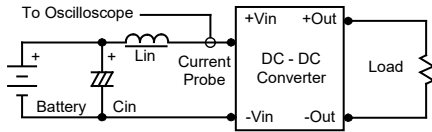

#### Peak-to-Peak Output Noise Measurement Test

Use a  $C_{out}$   $0.47\mu F$  ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC-DC Converter.

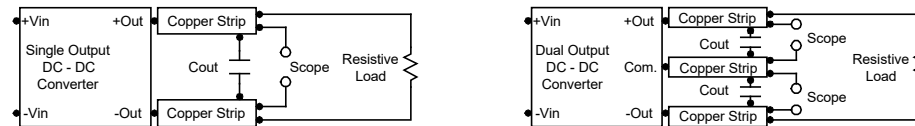


### Technical Notes

#### Overcurrent Protection

To provide protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure current limiting for an unlimited duration. At the point of current-limit inception, the unit shifts from voltage control to current control. The unit operates normally once the output current is brought back into its specified range.

#### Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup. Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance ( $ESR < 1.0\Omega$  at 100 kHz) capacitor of a  $3.3\mu F$  for the 12V input devices and a  $1.5\mu F$  for the 24V and 48V devices.

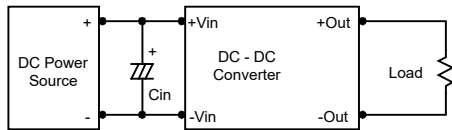

#### Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use  $3.3\mu F$  capacitors at the output.



#### Maximum Capacitive Load

The MIW1200 series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. For optimum performance we recommend  $1000\mu F$  maximum capacitive load for dual outputs and  $4000\mu F$  capacitive load for single outputs. The maximum capacitance can be found in the data sheet.

#### Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below  $100^\circ C$ .

The derating curves are determined from measurements obtained in a test setup.

