

FEATURES

- ▶ DIP-24 Plastic Package
- ▶ Wide 2:1 Input Range
- ▶ High Efficiency up to 86%
- ▶ Operating Ambient Temp. Range -40°C to +85°C
- ▶ Short Circuit Protection
- ▶ I/O-isolation 1500VDC
- ▶ Cost optimized Design


PRODUCT OVERVIEW

The MINMAX MIW3100 series is a range of isolated 6W DC-DC converter modules featuring fully regulated output voltages and wide 2:1 input voltage ranges. The product comes in a DIP-24 plastic package with industry standard pinout. An excellent efficiency allows an operating temperature range of -40°C to +85°C. These DC-DC converters offer an economical solution for many cost critical applications in battery-powered equipment and instrumentation.

Model Selection Guide

Model Number	Input Voltage (Range) VDC	Output Voltage VDC	Output Current		Input Current		Reflected Ripple Current mA(typ.)	Max. capacitive Load μF	Efficiency (typ.)	
			Max.	Min.	@Max. Load	@No Load			@Max. Load	
			mA	mA	mA(typ.)	mA(typ.)			%	
MIW3121	12 (9 ~ 18)	3.3	1200	60	429	20	25	6800	77	
MIW3122		5	1000	50	514				81	
MIW3123		12	500	25	595				84	
MIW3126		±12	±250	±12.5	595				1000#	84
MIW3127		±15	±200	±10	595					84
MIW3131	24 (18 ~ 36)	3.3	1200	60	209	5	15	6800	79	
MIW3132		5	1000	50	251				83	
MIW3133		12	500	25	291				86	
MIW3136		±12	±250	±12.5	291				1000#	86
MIW3137		±15	±200	±10	291					86

For each output

Input Specifications

Parameter	Model	Min.	Typ.	Max.	Unit
Input Surge Voltage (1 sec. max.)	12V Input Models	-0.7	---	25	VDC
	24V Input Models	-0.7	---	50	
Start-Up Voltage	12V Input Models	4.5	6	8	
	24V Input Models	8	12	16	
Under Voltage Shutdown	12V Input Models	---	---	8	
	24V Input Models	---	---	16	
Short Circuit Input Power	All Models	---	1000	3000	mW
Internal Power Dissipation		---	---	2500	mW
Input Filter		Internal Pi Type			
Conducted EMI (with suffix A only)	Compliance to EN 55022, class A				

Output Specifications


Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Setting Accuracy		---	±0.5	±1.0	%Vnom.
Output Voltage Balance	Dual Output, Balanced Loads	---	±0.5	±2.0	%
Line Regulation	Vin=Min. to Max. @Full Load	---	±0.1	±0.3	%
Load Regulation	Io=20% to 100%	---	±0.3	±1.0	%
Ripple & Noise	0-20 MHz Bandwidth	---	50	75	mV _{P-P}
Transient Recovery Time	25% Load Step Change	---	150	300	μS
Transient Response Deviation		---	±2	±6	%
Temperature Coefficient		---	±0.01	±0.02	%/°C
Over Current Protection	Foldback	120	150	---	%
Short Circuit Protection	Continuous, Automatic Recovery				

General Specifications


Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	60 Seconds	1500	---	---	VDC
	1 Seconds	1800	---	---	VDC
I/O Isolation Resistance	500 VDC	1000	---	---	MΩ
I/O Isolation Capacitance	100kHz, 1V	---	380	500	pF
Switching Frequency		---	300	---	kHz
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign	1,000,000			Hours
Safety Approvals	UL/cUL 60950-1 recognition(CSA certificate), IEC/EN 60950-1(CB-scheme)				

Environmental Specifications

Parameter	Min.	Max.	Unit
Operating Ambient Temperature Range (See Power Derating Curve)	-40	+85	°C
Case Temperature	---	+90	°C
Storage Temperature Range	-50	+125	°C
Humidity (non condensing)	---	95	% rel. H
Lead Temperature (1.5mm from case for 10Sec.)	---	260	°C

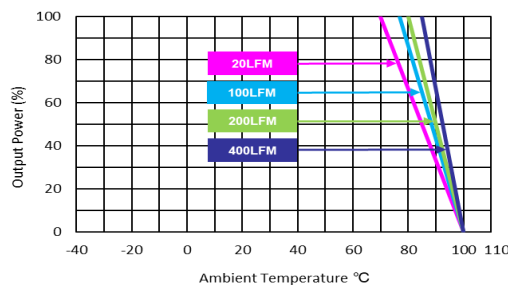Power Derating Curve

Notes

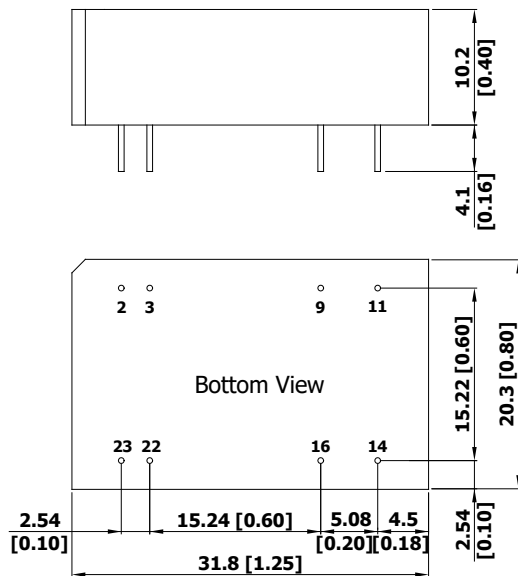- Specifications typical at Ta=+25°C, resistive load, nominal input voltage and rated output current unless otherwise noted.
- Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%.
- These power converters require a minimum output loading to maintain specified regulation, operation under no-load conditions will not damage these modules; however they may not meet all specifications listed.
- We recommend to protect the converter by a slow blow fuse in the input supply line.
- Other input and output voltage may be available, please contact MINMAX.
- Specifications are subject to change without notice.

Package Specifications
Mechanical Dimensions

Pin Connections

Pin	Single Output	Dual Output	Diameter mm (inches)
2	-Vin	-Vin	∅ 0.50 [0.02]
3	-Vin	-Vin	∅ 0.50 [0.02]
9	No Pin	Common	∅ 0.50 [0.02]
11	NC	-Vout	∅ 0.50 [0.02]
14	+Vout	+Vout	∅ 0.50 [0.02]
16	-Vout	Common	∅ 0.50 [0.02]
22	+Vin	+Vin	∅ 0.50 [0.02]
23	+Vin	+Vin	∅ 0.50 [0.02]

NC: No Connection

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.25 (X.XX±0.01)
X.XX±0.13 (X.XXX±0.005)
- ▶ Pin diameter ∅ 0.5 ±0.05 (0.02±0.002)

Physical Characteristics

Case Size	: 31.8x20.3x10.2mm (1.25x0.80x0.40 Inches)
Case Material	: Non-Conductive Black Plastic (flammability to UL 94V-0 rated)
Pin Material	: Phosphor Bronze
Weight	: 16.9g


Order Code Table

Standard	With EMI
MIW3121	MIW3121A
MIW3122	MIW3122A
MIW3123	MIW3123A
MIW3126	MIW3126A
MIW3127	MIW3127A
MIW3131	MIW3131A
MIW3132	MIW3132A
MIW3133	MIW3133A
MIW3136	MIW3136A
MIW3137	MIW3137A

Test Setup


Input Reflected-Ripple Current Test Setup

Input reflected-ripple current is measured with an inductor L_{in} (4.7 μ H) and C_{in} (220 μ F, ESR < 1.0 Ω at 100 kHz) to simulate source impedance. Capacitor C_{in} offsets possible battery impedance. Current ripple is measured at the input terminals of the module, measurement bandwidth is 0-500 kHz.

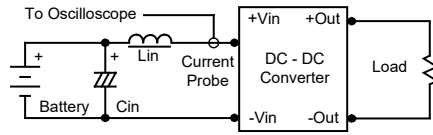

Peak-to-Peak Output Noise Measurement Test

Use a C_{out} 0.47 μ F ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC-DC Converter.

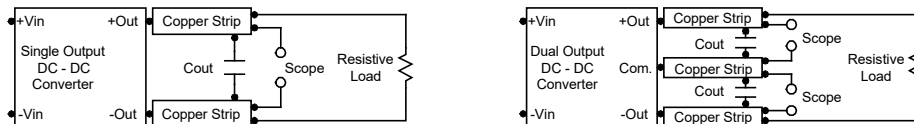


Technical Notes

Overcurrent Protection

To provide protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure current limiting for an unlimited duration. At the point of current-limit inception, the unit shifts from voltage control to current control. The unit operates normally once the output current is brought back into its specified range.


Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup. Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1.0 Ω at 100 kHz) capacitor of a 3.3 μ F for the 12V input devices and a 2.2 μ F for the 24V devices.

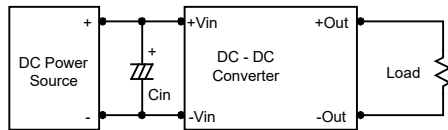

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 3.3 μ F capacitors at the output.

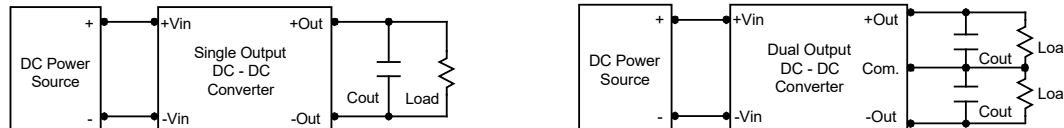

Maximum Capacitive Load

MIW3100 series have limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. For optimum performance we recommend 1000 μ F maximum capacitive load for dual outputs and 6800 μ F capacitive load for single outputs. The maximum capacitance can be found in the data sheet.

Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 90 $^{\circ}$ C.

The derating curves are determined from measurements obtained in a test setup.

