

DC-DC CONVERTER 12W, Regulated Output, DIP Package

## **FEATURES**

- Smallest Encapsulated 12W Converter
- Industrial Standard DIP-16 Package
- Ultra-wide 4:1 Input Voltage Range
- Fully Regulated Output Voltage
- I/O Isolation 1500 VDC
- Operating Ambient Temp. Range -40°C to +85°C
- Low No Load Power Consumption
- No Min. Load Requirement
- Under-voltage, Overload and Short Circuit Protection
- Shielded Metal Case with Insulated Baseplate
- Conducted EMI EN 55032 Class A
- UL/cUL/IEC/EN 62368-1 Safety Approval & CE Marking



## **PRODUCT OVERVIEW**

The MDWI12 series gives designers the flexibility to match the choice of converter to specific application requirements. The high power density of MDWI12 series, at 59W/in<sup>3</sup>, is expected to make it popular with manufacturers of industrial, medical, transportation and power generation equipment where space-constrained designs.

This product offers a full 12Watt isolated DC-DC converter within a small encapsulated DIP-16 package which occupied only 0.5in<sup>2</sup> of PCB space. There are 14 models available for 24 & 48VDC with ultra-wide 4:1 input voltage range. Further features included under-voltage protection, overload protection, short circuit protection, very low no load power consumption, no min. load requirement and conducted EMI class A approved as well. High efficiency allows operating temperatures range of -40°C to 85°C. All models have been qualified per the CB scheme with safety approvals to UL/cUL/IEC/EN 62368-1.

Model Selection	n Guide							
Model	Input	Output	Output	Output	Ing	out	Max. capacitive	Efficiency
Number	Voltage	Voltage	Power	Current	Cur	rent	Load	(typ.)
	(Range)			Max.	@Max. Load	@No Load		@Max. Load
	VDC	VDC	W	mA	mA(typ.)	mA(typ.)	μF	%
MDWI12-24S05		5	12	2400	602		1500	83
MDWI12-24S051		5.1	12.24	2400	614		1500	83
MDWI12-24S12	0.4	12	12	1000	575		680	87
MDWI12-24S15	24	15	12	800	568	10	680	88
MDWI12-24S24	(9 ~ 36)	24	12	500	568		220	88
MDWI12-24D12		±12	12	±500	575		#470	87
MDWI12-24D15		±15	12	±400	575		#220	87
MDWI12-48S05		5	12	2400	301		1500	83
MDWI12-48S051		5.1	12.24	2400	307		1500	83
MDWI12-48S12	40	12	12	1000	287		680	87
MDWI12-48S15	48 (18 ~ 75)	15	12	800	284	7	680	88
MDWI12-48S24		24	12	500	284		220	88
MDWI12-48D12		±12	12	±500	287		#470	87
MDWI12-48D15		±15	12	±400	287		#220	87

# For each output

2023/02/16 REV:6 Page 1 of 4



DC-DC CONVERTER 12W, Regulated Output, DIP Package

Input Specifications						
Parameter	Conditions / Model	Min.	Тур.	Max.	Unit	
Innut Curren Valtage (1 and may)	24V Input Models	-0.7		50		
Input Surge Voltage (1 sec. max.)	48V Input Models	-0.7		100		
Chart Lin Three held Velters	24V Input Models			9		
Start-Up Threshold Voltage	48V Input Models			18	VDC	
Linder Vallage Chutdaur	24V Input Models		8			
Under Voltage Shutdown	48V Input Models		16			
Start Up Time (Power On)	Nominal Vin and Constant Resistive Load		30		mS	
Input Filter	All Models		Interna	Рі Туре		

## **Output Specifications**

output opcomoutions						
Parameter	Conditions		Min.	Тур.	Max.	Unit
Output Voltage Setting Accuracy					±1.0	%Vnom.
Output Voltage Balance	Dual Output, E	Dual Output, Balanced Loads		±1.0	±2.0	%
Line Regulation	Vin=Min. to Ma	ax. @Full Load		±0.2	±0.8	%
Load Regulation	lo=0%	to 100%			±1.0	%
Load Cross Regulation (Dual Output Models)	Asymmetrical Load 25/100% Full Load				±5.0	%
Minimum Load	No minimum Load Requirement					
Ripple & Noise	0-20 MHz Bandwidth	Measured with a 2.2µF/50V MLCC		70		mV <sub>P-P</sub>
Transient Recovery Time	25% Load Step Change				500	µsec
Transient Response Deviation				±3	±5	%
Temperature Coefficient				±0.01	±0.02	%/°C
Over Load Protection	Hiccup			160		%
Short Circuit Protection	Continuous, Automatic Recovery (Hiccup Mode 0.3Hz typ.)					

## **General Specifications**

oonoral opeontoatione					
Parameter	Conditions	Min.	Тур.	Max.	Unit
1/Q logistion Veltage	60 Seconds	1500			VDC
I/O Isolation Voltage	1 Second	1800			VDC
Isolation Voltage Input/Output to case		1000			VDC
I/O Isolation Resistance	500 VDC	1000			MΩ
I/O Isolation Capacitance	100kHz, 1V			2200	pF
Switching Frequency			480		kHz
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign	2,314,289			Hours
Safety Approvals UL/cUL 62368-1 recognition(UL certificate), IEC/EN 62368-1 & 60950-1(C		-1(CB report)			

## **EMC Specifications**

Parameter		Standards & Level			
EMI	Conduction		Without external components	Class A	
EMI <sub>(5)</sub>	(5) EN 55032 With extern		With external components	Class A	
	EN 55035				
	ESD	Direct discharge	Indirect discharge HCP & VCP	•	
	ESD	EN 61000-4-2 Air $\pm$ 8kV , Contact $\pm$ 6kV	Contact ± 6kV	A	
EMG	Radiated immunity	EN 61000-4-3 20V/m		A	
EMS <sub>(5)</sub>	Fast transient	EN 61000-4-4 ±2kV			
	Surge	EN 61000-4-5 ±2kV			
	Conducted immunity	EN 61000-4-6 10Vrms			
	PFMF	EN 61000-4-8 100A/m, 1000A/m for 1 sec			

E-mail:sales@minmax.com.tw Tel:886-6-2923150




DC-DC CONVERTER 12W, Regulated Output, DIP Package

## **Environmental Specifications**

Parameter	Model		Max.	Unit
	MDWI12-24S05, MDWI12-24S051, MDWI12-48S05 MDWI12-48S051		+50	
Operating Temperature Range Nominal Vin, Load 100% Inom. (for Power Derating see relative Derating Curves)	MDWI12-24S12, MDWI12-24S15, MDWI12-24S24 MDWI12-48S12, MDWI12-48S15, MDWI12-48S24 MDWI12-24D12, MDWI12-24D15, MDWI12-48D12 MDWI12-48D15		+65	°C
Case Temperature			+105	°C
Storage Temperature Range		-50	+125	°C
Humidity (non condensing)			95	% rel. H
Lead Temperature (1.5mm from case for 10Sec.)			260	°C

### Power Derating Curve

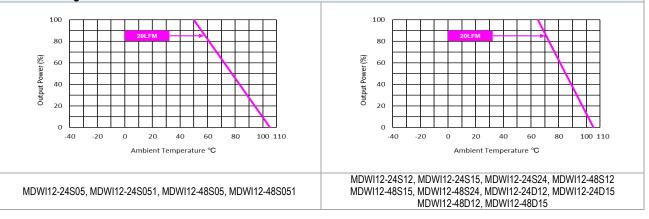


### Notes

- 1 Specifications typical at Ta=+25°C, resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%.
- 3 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 4 Other input and output voltage may be available, please contact MINMAX.
- 5 The external components might be required to meet EMI/EMS standard for some of test items. Please contact MINMAX for the solution in detail.
- 6 Specifications are subject to change without notice.



DC-DC CONVERTER 12W, Regulated Output, DIP Package

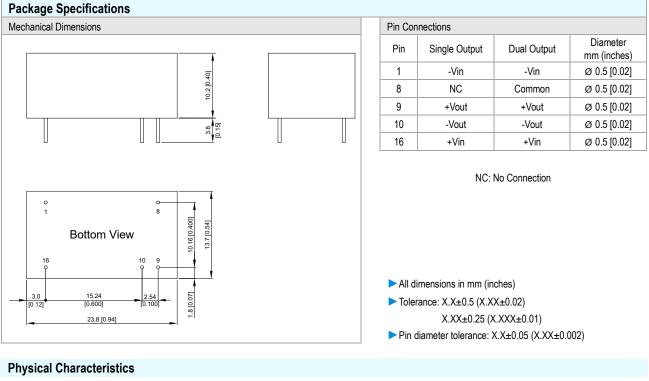

Case Size	:	23.8x13.7x10.2 mm (0.94x0.54x0.40 inches)
Case Material	:	Metal With Non-Conductive Baseplate
Pin Material	:	Copper Alloy
Weight	:	8.6g

E-mail:sales@minmax.com.tw Tel:886-6-2923150




#### DC-DC CONVERTER 12W, Regulated Output, DIP Package

### **Test Setup**

Peak-to-Peak Output Noise Measurement Test

Refer to the output specifications or add 4.7µF capacitor if the output specifications undefine Cout. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC-DC Converter.




### **Technical Notes**

#### Overload Protection

To provide hiccup mode protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure overload for an unlimited duration.


#### Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor on the input to insure startup. By using a good quality low Equivalent Series Resistance (ESR <  $1.0\Omega$  at 100 kHz) capacitor of a  $2.2\mu$ F for the 24V and 48V input devices, capacitor mounted close to the power module helps ensure stability of the unit.



#### Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 2.2µF capacitors at the output.



#### Maximum Capacitive Load

The MDWI12 series has limitation of maximum connected capacitance on the output. The power module may operate in current limiting mode during start-up, affecting the ramp-up and the startup time. Connect capacitors at the point of load for best performance. The maximum capacitance can be found in the data sheet.

#### Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 105°C. The derating curves are determined from measurements obtained in a test setup.

