

FEATURES

- ▶ Fully Encapsulated Plastic Case for PCB, Chassis and DIN-Rail Mounting Version
- ▶ Universal Input 85~264VAC, 47~440Hz
- ▶ Single, Dual and Triple Outputs
- ▶ Protection Class II as per IEC/EN 60536
- ▶ I/O Isolation 3000VAC with Reinforced Insulation
- ▶ Operating Ambient Temp. Range -25°C to +70°C
- ▶ Overload/Voltage and Short Circuit Protection
- ▶ Designed-in EMI Emission meets EN55011/22 Class B & FCC Level B
- ▶ Designed-in EMC Immunity meets EN61000-4-2,3,4,5,6,8,11
- ▶ UL508 Safety Approval (Option) Specifically for Industrial Application
- ▶ UL/cUL/IEC/EN 60950-1 Safety Approval & CE Marking


PRODUCT OVERVIEW

The MINMAX AKF-15 series is a new range of fully encapsulated AC/DC power supply modules. The product features EMI-filter to EN55022, class B and EMS compliance to EN 61000-4 standard. Universal input voltage 85-264VAC and International safety approvals qualifies these power modules for applications in products with worldwide markets. For industrial applications, the models for chassis mounting can also be supplied as option with UL508 approval. The AKF-15 series provide a cost effective solution for many space critical applications in commercial and industrial electronic equipment.

Model Selection Guide

Model Number PCB Mounting	Output Voltage VDC	Output Current Max. mA	Input Current 115VAC, 60Hz		Max. capacitive Load μF	Efficiency (typ.) @Max. Load %
			@Max. Load mA(typ.)	@No Load mA(typ.)		
			AKF-15S05	5		
AKF-15S12	12	1250	275	30	2200	79
AKF-15S15	15	1000	275	30	2200	79
AKF-15S24	24	625	275	30	1000	79
AKF-15S48	48	310	273	30	680	79
AKF-15D12	±12	±650	275	30	#1500	79
AKF-15D15	±15	±500	275	30	#1500	79
AKF-15D512	5	1500	302	30	2000	72
	*12	625			1500	
AKF-15T512	5	2000	290	30	2200	74
	*12	200			1500	
	*-12	-200			1500	
AKF-15T515	*5	2000	284	30	2200	74
	*15	150			1500	
	*-15	-150			1500	

* Output voltage accuracy 4% max.

For each output

Input Specifications

Parameter	Conditions / Model		Min.	Typ.	Max.	Unit
Input Voltage Range	All Models		85	---	264	VAC
Input Frequency Range			47	---	440	Hz
Input Voltage Range			120	---	370	VDC
Inrush Current	115VAC	Cold Start at 25°C	---	---	15	A
	230VAC		---	---	30	A

Output Specifications						
Parameter		Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy			---	±1.0	±2.0	%
Line Regulation		Vin=Min. to Max. @Full Load	---	±0.5	±1.0	%
Load Regulation		Io=10% to 100%	Single Output Models		---	±1.0
			Dual/ Triple Output Models		---	±5.0
Cross Regulation- Dual Positives / Triple Output	Vo1	Measured output Io = 20% to 100% of rated load Other output(s) set at 50% of rated load	---	±1.0	---	%
	Vo2		---	±2.5	---	%
	Vo3		---	±2.5	---	%
Ripple & Noise		0-20 MHz Bandwidth	5VDC Output Models		---	1.5
			Other Output Models		---	0.8
Minimum Load			---	10	---	%Inom.
Over Voltage Protection		Zener diode clamp	---	120	---	% of Vo
Temperature Coefficient			---	±0.01	±0.02	%/°C
Overshoot			---	---	5	% Vout
Current Limitation		Foldback, auto-recovery		105	---	---
		(long term overload condition may cause damage)				
Short Circuit Protection		Hiccup mode, Automatic Recovery				

General Specifications						
Parameter		Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage		Input to Output, 60 Seconds	3000	---	---	VACrms
I/O Isolation Resistance		500 VDC	100	---	---	MΩ
Switching Frequency			---	100	---	KHz
Hold-up Time			---	20	---	ms
MTBF (calculated)		MIL-HDBK-217F@25°C, Ground Benign	280,000			Hours
Protection Class II		According IEC/EN 60536				
Safety Approvals		UL/cUL 60950-1 recognition (UL certificate), IEC/EN 60950-1 (CB-report) UL/cUL 508 listed certificate				


EMC Specifications			
Parameter		Standards & Level	Performance
EMI		Conduction and Radiation	EN55011, EN55022, FCC part 15
		EN55011, EN55024	Class B
EMS		ESD	EN61000-4-2 air ± 8kV, Contact ± 4kV
		Radiated immunity	EN61000-4-3 10V/m
		Fast transient	EN61000-4-4 ±2kV
		Surge	EN61000-4-5 ±1kV
		Conducted immunity	EN61000-4-6 10Vrms
		PFMF	EN61000-4-8 30A/m
		Dips	EN61000-4-11 30% 10ms
		Interruptions	EN61000-4-11 >95% 5000ms

Environmental Specifications						
Parameter		Conditions	Min.	Typ.	Max.	Unit
Operating Ambient Temperature Range		Natural Convection	-25	---	+70	°C
Storage Temperature Range			-40	---	+85	°C
Power Derating		+50°C to +70°C	0.563			W / °C
Thermal Shutdown		Shutdown, Internal IC Junction Temperature	---	140	---	°C
		Automatic Recovery, Internal IC Junction Temperature	---	65	---	°C
Humidity (non condensing)			---	---	95	% rel. H
Cooling		Natural Convection				
Lead Temperature (1.5mm from case for 10Sec.)			---	---	260	°C

Notes

- 1 All Specifications typical at Ta=+25°C, resistive load, 115VAC, 60Hz input voltage and after warm-up time rated output current unless otherwise noted.
- 2 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 3 These power modules require a minimum output loading to maintain specified regulation, operation under no-load conditions will not damage the power supplies however they may not meet all listed specifications.
- 4 Other input and output voltage may be available, please contact factory.
- 5 Specifications are subject to change without notice

Package Specifications PCB Mounting

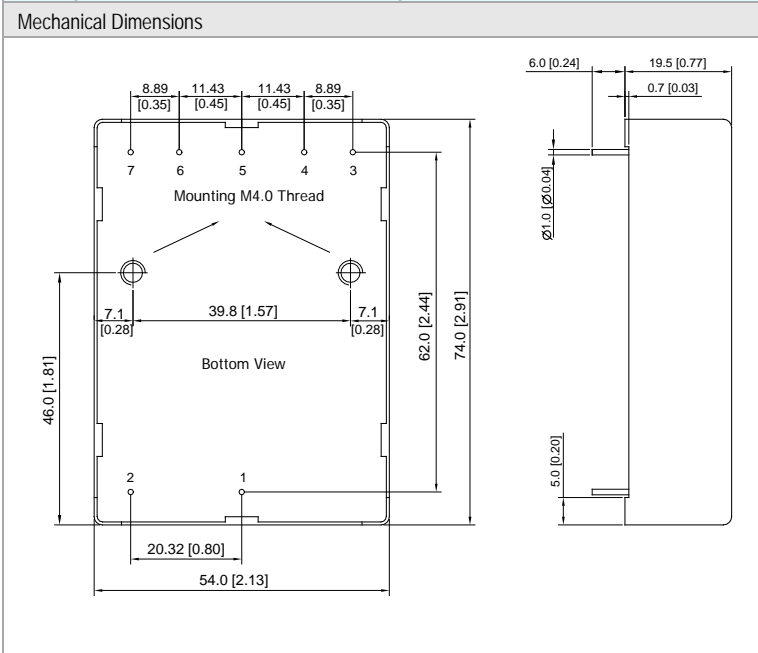

Pin Connections


Pin	Single	Dual (D12,D15)	Dual (D512)	Triple
1	AC(N) – AC Neutral			
2	AC(L) – AC Line			
3	No Pin			-Vout3
4	-Vout	-Vout	-Vout2	Common
5	No Pin	Common	+Vout2	+Vout2
6	+Vout	+Vout	-Vout1	-Vout1
7	No Pin		+Vout1	+Vout1

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: ±0.5 (±0.02)
- ▶ Pin diameter $\varnothing 1.0 \pm 0.1$ (0.04±0.004)

Physical Characteristics

Case Size	: 74.0x54.0x19.5mm (2.91x2.13x0.77 inches)
Case Material	: Plastic resin (flammability to UL 94V-0 rated)
Pin Material	: Copper Alloy with Gold Plate Over Nickel Subplate
Weight	: 174g

Package Specifications Chassis Mounting (order code suffix C)

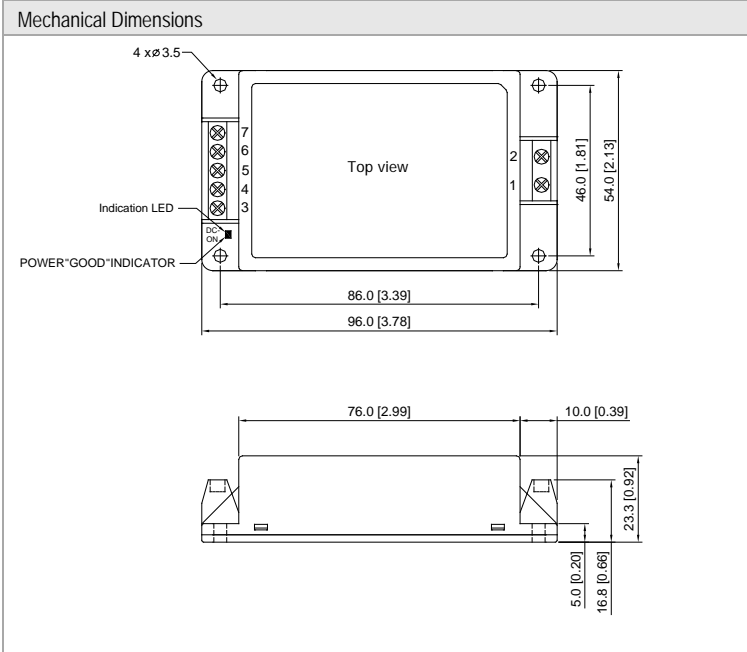

Connections

Terminal	Single	Dual (D12,D15)	Dual (D512)	Triple
1	AC(N) – AC Neutral			
2	AC(L) – AC Line			
3	NC			-Vout3
4	-Vout	-Vout	-Vout2	Common
5	NC	Common	+Vout2	+Vout2
6	+Vout	+Vout	-Vout1	-Vout1
7	NC		+Vout1	+Vout1


NC: No Connection

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.5 (X.XX±0.02)
X.XX±0.25 (X.XXX±0.01)
- ▶ Pin pitch tolerance: ±0.25 (0.01)

Physical Characteristics


Case Size	: 96.0x54.0x23.3mm (3.78x2.13x0.92 inches)
Case Material	: Plastic resin (flammability to UL 94V-0 rated)
Weight	: 162g

Package Specifications with DIN Rail Mounting Bracket (order code AC-DIN-01)

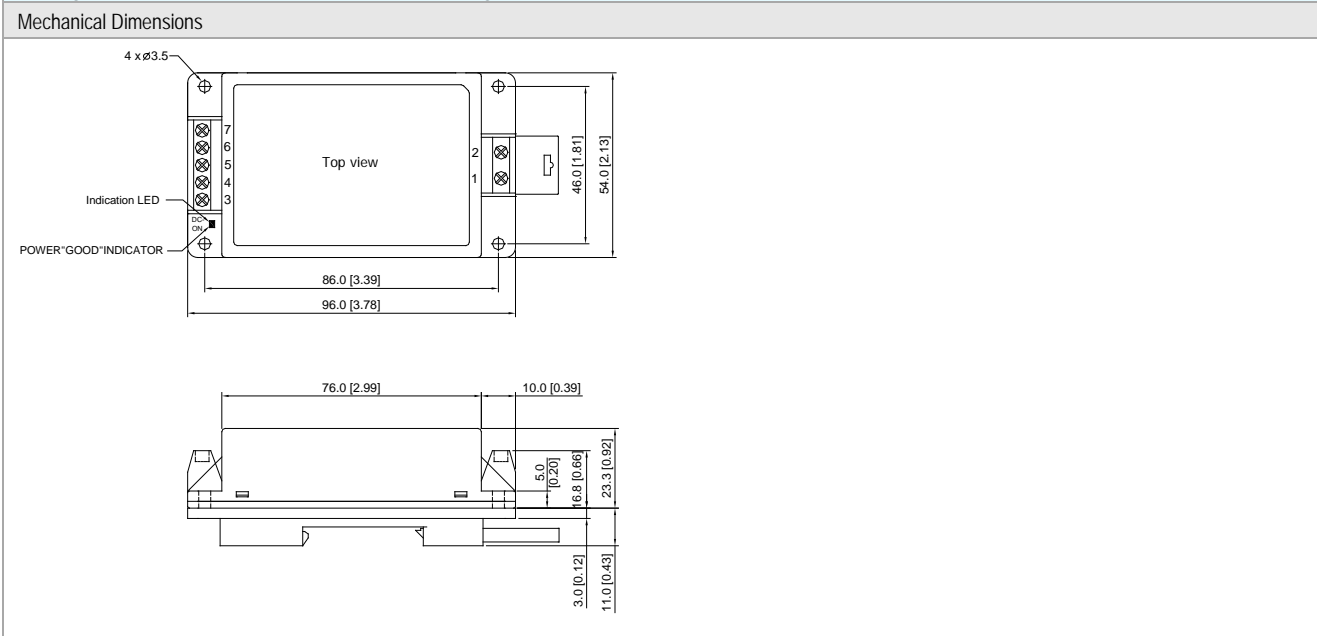

Physical Characteristics

Case Size	: 96.0x54.0x23.3mm (3.78x2.13x0.92 inches)
Case Material	: Plastic resin (flammability to UL 94V-0 rated)
Weight	: 216g

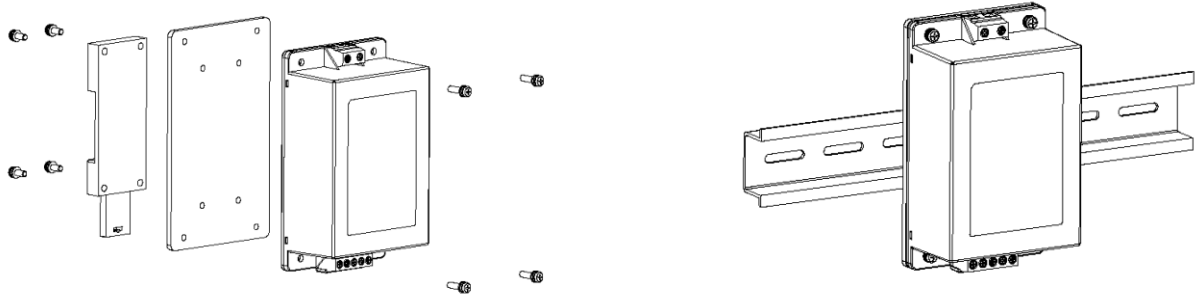DIN-Rail Mounting Kit


Order Code Table							
PCB Mounting	Chassis Mounting	PCB Mounting With UL508	Chassis Mounting With UL508	With DIN Rail Mounting by two Order Code		Chassis Mounting with UL508 & DIN Rail Mounting by two Order Code	
AKF-15S05	AKF-15S05C	AKF-15S05ICE	AKF-15S05CICE	AKF-15S05C	AC-DIN-01	AKF-15S05CICE	AC-DIN-01
AKF-15S12	AKF-15S12C	AKF-15S12ICE	AKF-15S12CICE	AKF-15S12C	AC-DIN-01	AKF-15S12CICE	AC-DIN-01
AKF-15S15	AKF-15S15C	AKF-15S15ICE	AKF-15S15CICE	AKF-15S15C	AC-DIN-01	AKF-15S15CICE	AC-DIN-01
AKF-15S24	AKF-15S24C	AKF-15S24ICE	AKF-15S24CICE	AKF-15S24C	AC-DIN-01	AKF-15S24CICE	AC-DIN-01
AKF-15S48	AKF-15S48C	AKF-15S48ICE	AKF-15S48CICE	AKF-15S48C	AC-DIN-01	AKF-15S48CICE	AC-DIN-01
AKF-15D12	AKF-15D12C	AKF-15D12ICE	AKF-15D12CICE	AKF-15D12C	AC-DIN-01	AKF-15D12CICE	AC-DIN-01
AKF-15D15	AKF-15D15C	AKF-15D15ICE	AKF-15D15CICE	AKF-15D15C	AC-DIN-01	AKF-15D15CICE	AC-DIN-01
AKF-15D512	AKF-15D512C	---	---	AKF-15D512C	AC-DIN-01	---	---
AKF-15T512	AKF-15T512C	---	---	AKF-15T512C	AC-DIN-01	---	---
AKF-15T515	AKF-15T515C	---	---	AKF-15T515C	AC-DIN-01	---	---