

**FEATURES**

- ▶ Smallest Encapsulated 10W Converter
- ▶ Industrial Standard DIP-16 Package
- ▶ Ultra-wide 4:1 Input Voltage Range
- ▶ Fully Regulated Output Voltage
- ▶ I/O Isolation 1500VDC
- ▶ Operating Ambient Temp. Range -40°C to +88°C
- ▶ Low No Load Power Consumption
- ▶ No Min. Load Requirement
- ▶ Under-voltage, Overload and Short Circuit Protection
- ▶ Shielded Metal Case with Insulated Baseplate
- ▶ Conducted EMI EN 55032 Class A Approved
- ▶ UL/cUL/IEC/EN 62368-1(60950-1) Safety Approval & CE Marking


**PRODUCT OVERVIEW**

MDWI10 series 10W DC-DC converter only occupies 0.5 square inches of PCB space, and its power density of up to 65W per cubic inch (W/in<sup>3</sup>), which is welcomed by various industries such as industrial, transportation, and renewable energy equipment makers because these industries have a demand for mitigating the critically limited space constrain. Nowadays, MDWI10 series 10W DC-DC converter is widely used in semiconductor process equipment, intelligent inspection robots, charging piles, and more.

The reason why you should choose MDWI10 series is because of its outstanding advanced circuit topology. It can provide up to 88% instantaneous load capacity and efficiency. Besides, MDWI10 owns 9-36V & 18-75V input voltage range, and 16 models of 3.3V, 5V, 5.1V, 12V, 15V, 24V, ±12V, ±15V for customers to flexibly choose from. The most ideal temperature for it ranges from -40°C to 88°C, fitting most industrial workplaces.

As a leading industrial DC DC converter supplier, MINMAX values the safety and protection of our products. We design various protective functions like overload protection, short circuit protection, low no load power consumption, etc. MDWI10 series 10W DC-DC converter is also passing CB Certification, EMI Conduction Class A Certification, and UL/cUL/IEC/EN 62368-1 safety certifications so that customers can rely on it. Welcome to contact your reliable DC DC converter manufacturer for more information!

**Model Selection Guide**

Model Number	Input Voltage (Range) VDC	Output Voltage VDC	Output Current Max. mA	Input Current		Max. capacitive Load μF	Efficiency (typ.) @Max. Load %
				@Max. Load mA(typ.)	@No Load mA(typ.)		
MDWI10-24S033	24 (9 ~ 36)	3.3	2700	464	10	2600	80
MDWI10-24S05		5	2000	502		1300	83
MDWI10-24S051		5.1	2000	512		1300	83
MDWI10-24S12		12	833	479		560	87
MDWI10-24S15		15	666	473		560	88
MDWI10-24S24		24	416	473		200	88
MDWI10-24D12		±12	±416	478		390#	87
MDWI10-24D15		±15	±333	478		200#	87
MDWI10-48S033		48 (18 ~ 75)	3.3	2700		232	7
MDWI10-48S05	5		2000	251	1300	83	
MDWI10-48S051	5.1		2000	256	1300	83	
MDWI10-48S12	12		833	239	560	87	
MDWI10-48S15	15		666	237	560	88	
MDWI10-48S24	24		416	236	200	88	
MDWI10-48D12	±12		±416	239	390#	87	
MDWI10-48D15	±15		±333	239	200#	87	

# For each output

Input Specifications					
Parameter	Conditions / Model	Min.	Typ.	Max.	Unit
Input Surge Voltage (1 sec. max.)	24V Input Models	-0.7	---	50	VDC
	48V Input Models	-0.7	---	100	
Start-Up Threshold Voltage	24V Input Models	---	---	9	
	48V Input Models	---	---	18	
Under Voltage Shutdown	24V Input Models	---	8	---	
	48V Input Models	---	16	---	
Start Up Time (Power On)	Nominal Vin and Constant Resistive Load	---	30	---	ms
Input Filter	All Models	Internal Pi Type			


Output Specifications						
Parameter	Conditions / Model	Min.	Typ.	Max.	Unit	
Output Voltage Setting Accuracy		---	---	±1.0	%Vnom.	
Output Voltage Balance	Dual Output, Balanced Loads	---	±1.0	±2.0	%	
Line Regulation	Vin=Min. to Max. @Full Load	---	±0.2	±0.8	%	
Load Regulation	Io=0% to 100%	---	---	±1.0	%	
Load Cross Regulation (Dual Output Models)	Asymmetrical Load 25/100% Full Load	---	---	±5.0	%	
Minimum Load	No minimum Load Requirement					
Ripple & Noise	0-20 MHz Bandwidth	3.3, 5V, 5.1V Output	---	60	---	mV P-P
		Other Output	---	80	---	mV P-P
Transient Recovery Time	25% Load Step Change	---	---	500	μsec	
Transient Response Deviation		---	±3	±5	%	
Temperature Coefficient		---	±0.01	±0.02	%/°C	
Over Load Protection	Hiccup	---	160	---	%	
Short Circuit Protection	Continuous, Automatic Recovery (Hiccup Mode 0.3Hz typ.)					

General Specifications					
Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	60 Seconds	1500	---	---	VDC
	1 Second	1800	---	---	VDC
Isolation Voltage Input/Output to case		1000	---	---	VDC
I/O Isolation Resistance	500 VDC	1000	---	---	MΩ
I/O Isolation Capacitance	100kHz, 1V	---	---	1500	pF
Switching Frequency		---	420	---	kHz
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign	2,538,785	---	---	Hours
Safety Approvals	UL/cUL 60950-1 recognition(UL certificate), IEC/EN 60950-1(CB-report)				
	UL/cUL 62368-1 recognition(UL certificate), IEC/EN 62368-1(CB-report)				


EMC Specifications					
Parameter	Standards & Level			Performance	
EMI <sub>(s)</sub>	Conduction	EN 55032	Without external components	Class A	
	Radiation		With external components		
EMS <sub>(s)</sub>	EN 55035				
	ESD	Direct discharge	Indirect discharge HCP & VCP		
		EN 61000-4-2 Air ± 8kV, Contact ± 6kV		Contact ± 6kV	
	Radiated immunity	EN 61000-4-3 20V/m			A
	Fast transient	EN 61000-4-4 ±2kV			A
	Surge	EN 61000-4-5 ±2kV			A
Conducted immunity	EN 61000-4-6 10Vrms			A	
PFMF	EN 61000-4-8 100A/m, 1000A/m (1 sec.)			A	

**Environmental Specifications**

Parameter	Conditions / Model	Min.	Max.	Unit
Operating Ambient Temperature Range Nominal Vin, Load 100% Inom. (for Power Derating see relative Derating Curves)	MDWI10-24S033, MDWI10-24S05, MDWI10-24S051 MDWI10-48S033, MDWI10-48S05, MDWI10-48S051	-40	+54	°C
	MDWI10-24S12, MDWI10-24S15, MDWI10-24S24 MDWI10-48S12, MDWI10-48S15, MDWI10-48S24 MDWI10-24D12, MDWI10-24D15, MDWI10-48D12, MDWI10-48D15		+71	
Case Temperature		---	+105	°C
Storage Temperature Range		-50	+125	°C
Humidity (non condensing)		---	95	% rel. H
Lead Temperature (1.5mm from case for 10 sec.)		---	260	°C

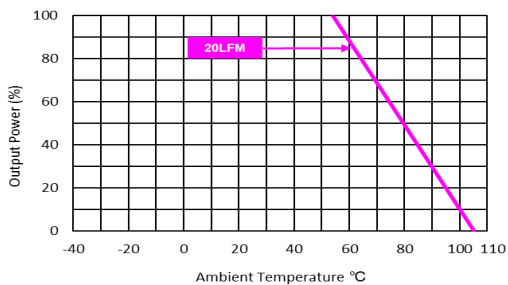**Power Derating Curve**


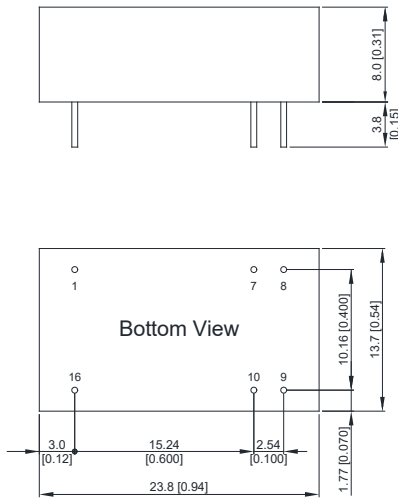
MDWI10-24S033, MDWI10-24S05, MDWI10-24S051  
MDWI10-48S033, MDWI10-48S05, MDWI10-48S051

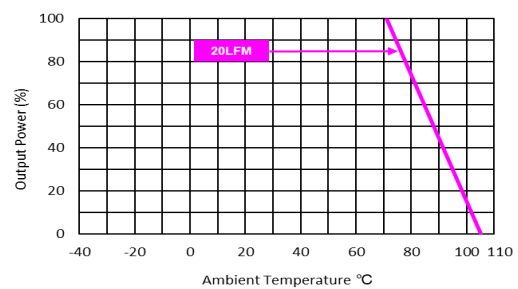

MDWI10-24S12, MDWI10-24S15, MDWI10-24S24  
MDWI10-48S12, MDWI10-48S15, MDWI10-48S24  
MDWI10-24D12, MDWI10-24D15, MDWI10-48D12, MDWI10-48D15

**Notes**

- Specifications typical at Ta=+25°C, resistive load, nominal input voltage and rated output current unless otherwise noted.
- Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%.
- We recommend to protect the converter by a slow blow fuse in the input supply line.
- Other input and output voltage may be available, please contact MINMAX.
- The external components might be required to meet EMI/EMS standard for some of test items. Please contact MINMAX for the solution in detail.
- Specifications are subject to change without notice.
- The repeated high voltage isolation testing of the converter can degrade isolation capability, to a lesser or greater degree depending on materials, construction, environment and reflow solder process. Any material is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage. Furthermore, the high voltage isolation capability after reflow solder process should be evaluated as it is applied on system.

**Package Specifications**
**Mechanical Dimensions**

**Pin Connections**

Pin	Single Output	Dual Output	Diameter mm (inches)
1	-Vin	-Vin	∅ 0.5 [0.02]
7	NC	NC	∅ 0.5 [0.02]
8	NC	Common	∅ 0.5 [0.02]
9	+Vout	+Vout	∅ 0.5 [0.02]
10	-Vout	-Vout	∅ 0.5 [0.02]
16	+Vin	+Vin	∅ 0.5 [0.02]

NC: No Connection

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.5 (X.XX±0.02)  
X.XX±0.25 (X.XXX±0.01)
- ▶ Pin diameter tolerance: X.X±0.05 (X.XX±0.002)


**Physical Characteristics**

Case Size	: 23.8x13.7x8.0 mm (0.94x0.54x0.31 inches)
Case Material	: Metal With Non-Conductive Baseplate
Pin Material	: Copper Alloy
Weight	: 6.5g

## Test Setup

### Peak-to-Peak Output Noise Measurement Test

Refer to the output specifications or add 4.7 $\mu$ F capacitor if the output specifications undefine  $C_{out}$ . Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC-DC Converter.

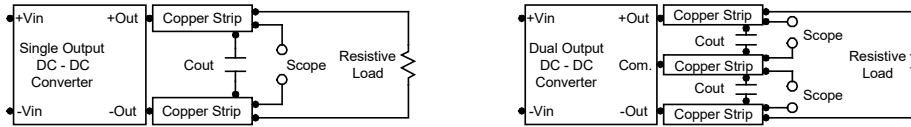


## Technical Notes

### Overload Protection

To provide hiccup mode protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure overload for an unlimited duration.


### Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor on the input to insure startup. By using a good quality low Equivalent Series Resistance (ESR < 1.0 $\Omega$  at 100 kHz) capacitor of a 2.2 $\mu$ F for the 24V and 48V input devices, capacitor mounted close to the power module helps ensure stability of the unit.

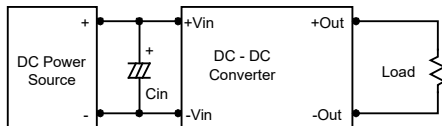

### Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 3.3 $\mu$ F capacitors at the output.

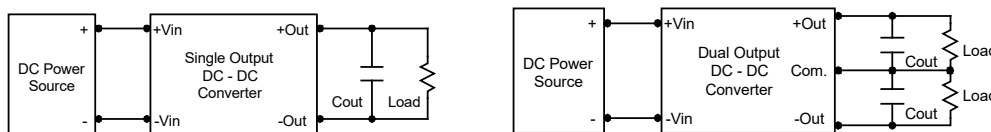

### Maximum Capacitive Load

The MDWI10 series has limitation of maximum connected capacitance on the output. The power module may operate in current limiting mode during start-up, affecting the ramp-up and the startup time. Connect capacitors at the point of load for best performance. The maximum capacitance can be found in the data sheet.

### Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 105°C. The derating curves are determined from measurements obtained in a test setup.

